



**GPIXEL CHINA CHANGCHUN (HQ)**

Office Buildings 1 and 5, Phase I, Optoelectronic Information Industrial Park, No. 7691 Ziyou Road, Changchun, Jilin, China.

Phone: +86-431-85077785

**GPIXEL CHINA HANGZHOU**

Room 3101-3109, 31/F, Huaye Development Center, No. 599, Jianye Road, Binjiang District, 310000, Hangzhou, China

Phone: +86-571-8771860

**GPIXEL CHINA DALIAN**

Room 05D, 11F, No. 7 Huixian Yuan, High-tech Industrial Zone, Dalian, China

Phone: +86-411-39937666

[www.gpixel.com](http://www.gpixel.com)

[info@gpixel.com](mailto:info@gpixel.com)

Disclaimer: The product information and pictures in this brochure are for reference only. For the latest information please visit [www.gpixel.com](http://www.gpixel.com).

GP-PR260528-WYY-V1.0

**GPIXEL EUROPE**

Gpixel NV

Copernicuslaan 60, 2018 Antwerpen, Belgium

Phone: +32-33034442

**GPIXEL JAPAN**

Gpixel Japan Co., Ltd.

TOC Osaki Building 18th Floor, 1-6-1 Osaki, Shinagawa-ku,

Tokyo, 141-0032 Japan

Phone: +81-03-5962-1600




# Advanced CMOS Image Sensors

Empowering vision with sensor excellence

Gpixel Microelectronics Inc.

[www.gpixel.com](http://www.gpixel.com)  
[info@gpixel.com](mailto:info@gpixel.com)


+ COMPANY

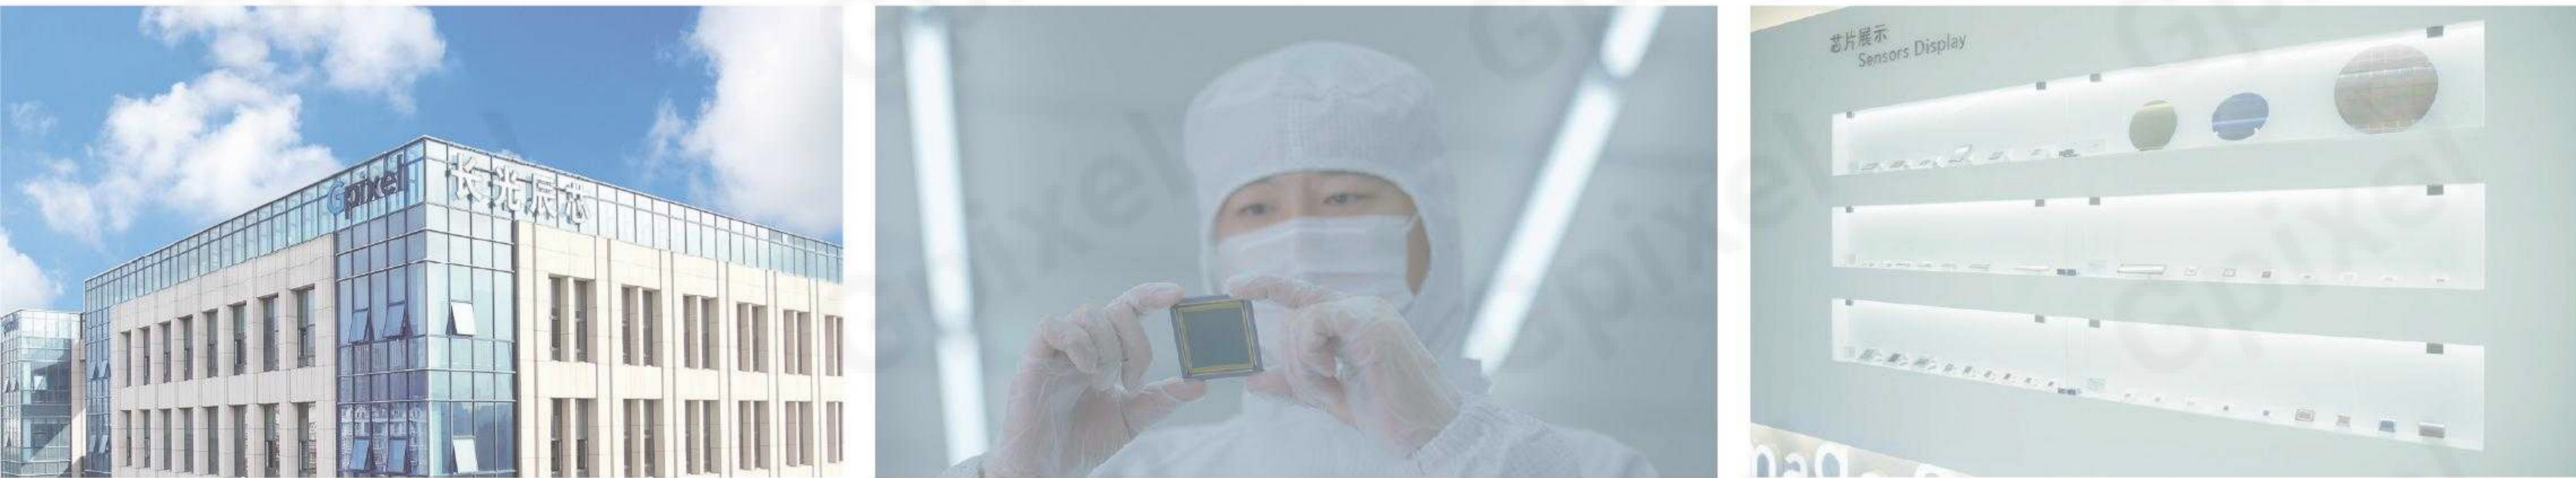

Founded in 2012, Gpixel focuses on the design and development of high-performance CMOS image sensors. Company headquarters are located in Changchun, China and additional design centers are located in Hangzhou, Dalian, Antwerp, and Tokyo. Gpixel provides advanced CMOS image sensors and exceptional customer service to camera makers around the world.



**2012**  
Founding



**Products**  
Advanced CMOS image sensors



**Vision**  
Focus on technology  
Insist on innovation

The Gpixel team includes first-class semiconductor physicists and globally recognized image sensor experts. Gpixel has a strong foundation of intellectual property related to charge-domain global shutter pixels, low noise circuit design, layout optimization for performance and yield of high resolution and large format image sensors, implementation of on-chip high dynamic range modes, backside illumination with high peak quantum efficiency, and true charge transfer based time delay and integration (TDI).

Gpixel has created a broad portfolio of products covering automation & inspection, scientific imaging, medical imaging, video & photography, and traffic & transportation.






## An international R&D team with deep technical expertise

Global R&D Center, the team maintains close communication and efficient collaboration.




**G** Global Shutter Pixels

- The entire pixel array can start and end exposure at the same time.
- Advanced charge-domain global shutter pixels can realize single-electron level readout noise.
- Dual microlens array design effectively optimizes shutter efficiency.

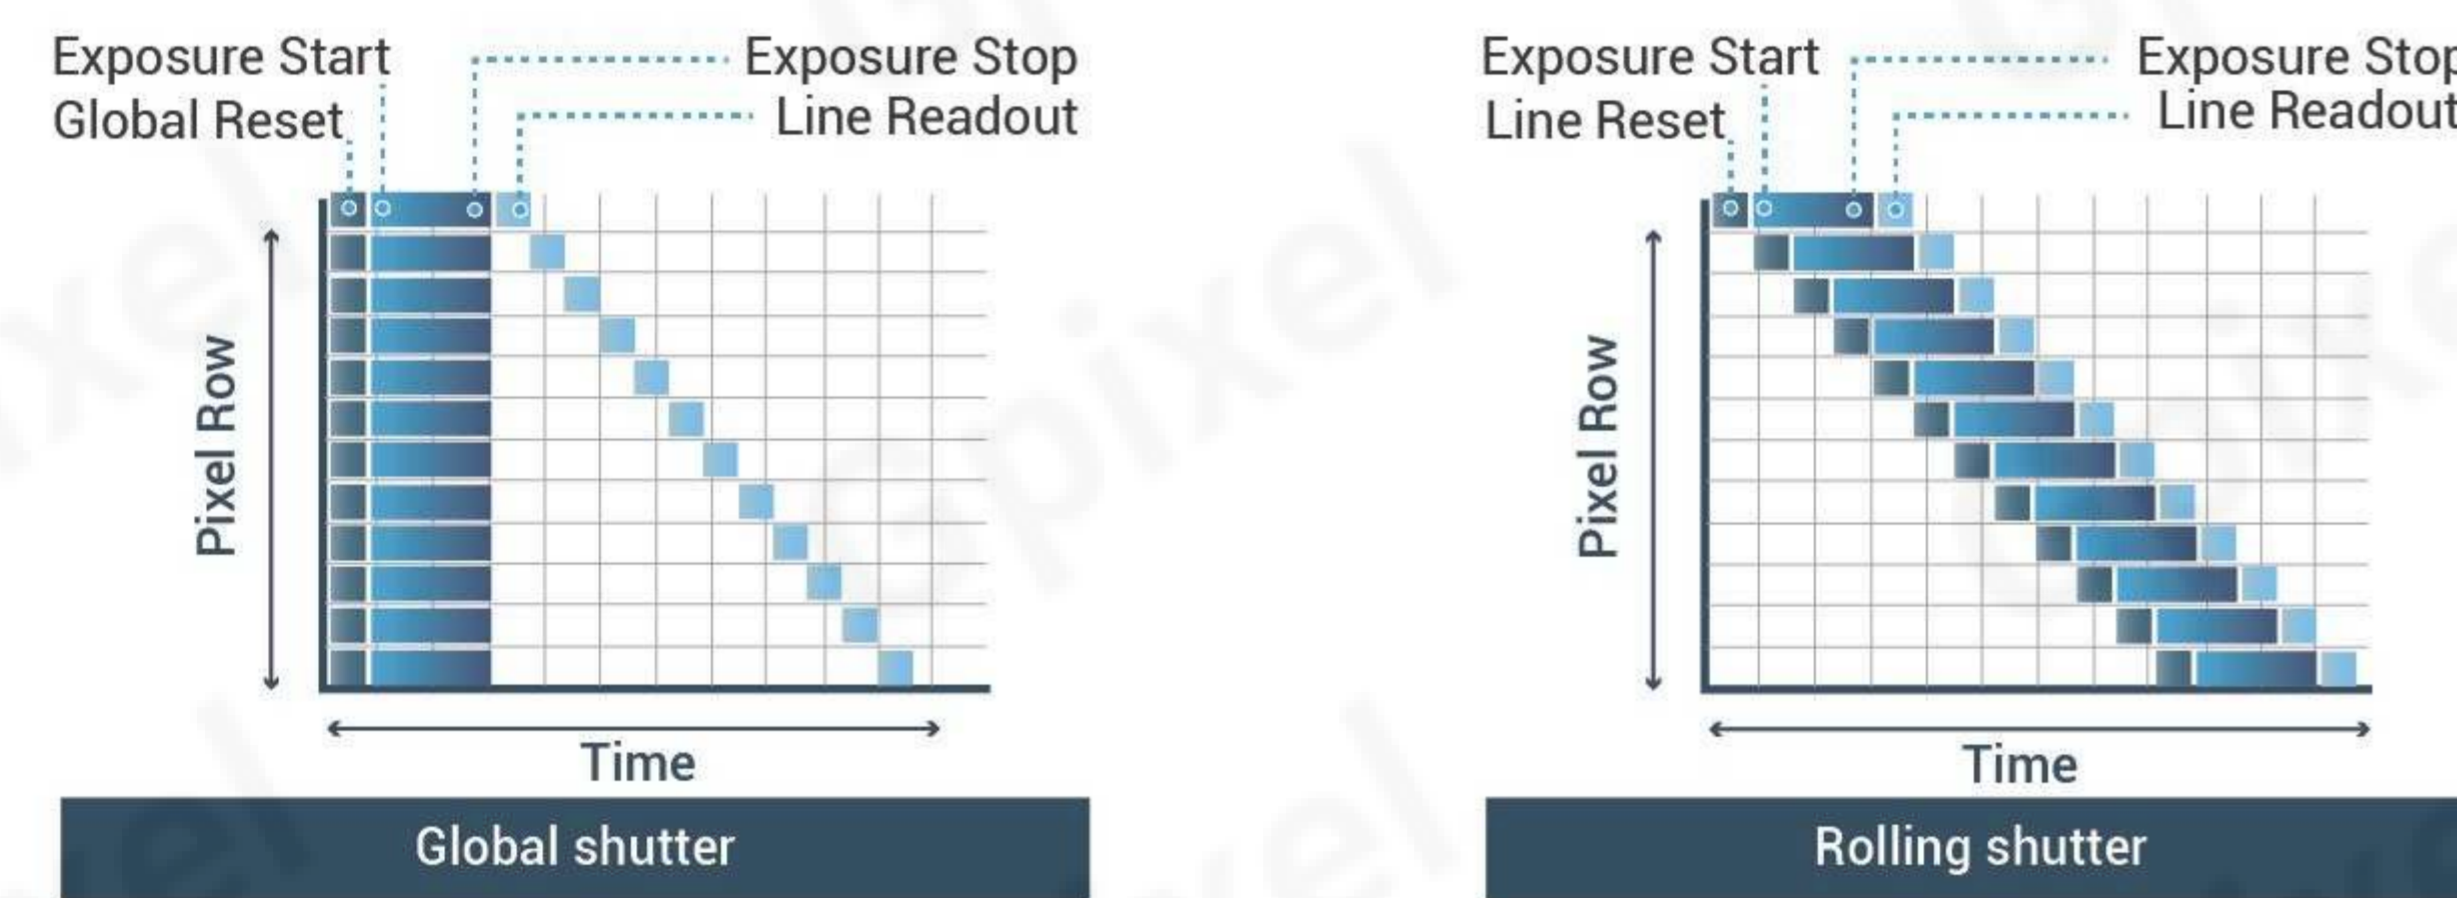


**G** Low Noise, High Speed, High Dynamic Range

- Correlated multiple sampling technology can achieve read noise less than a single electron.
- Using interleaved time-sharing high-speed circuit design, data rates up to 1Tbps are possible.
- Dual-gain circuit designs achieve >100 dB dynamic range in a single exposure.

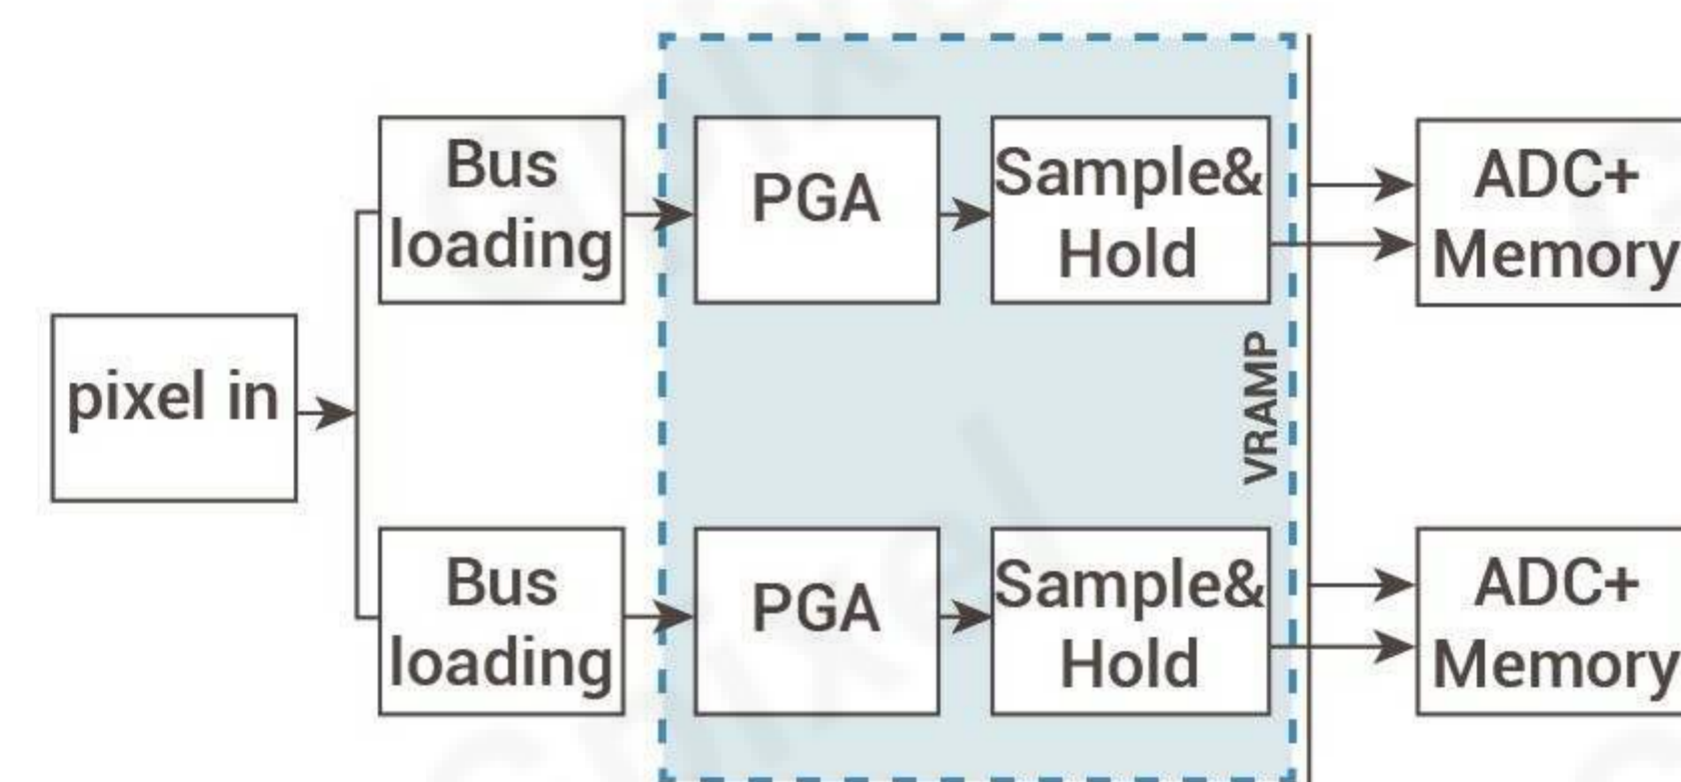


**G** Time Delay and Integration

- In low-light environments, TDI can provide both fast scanning and high image quality while optimizing detection efficiency.
- For the same scanning speed, compared with ordinary line array sensors, less illumination is required and the system's energy consumption is lower.
- TDI is ideal for the inspection of wafers, PCBs, and displays, as well as for high throughput gene sequencing.

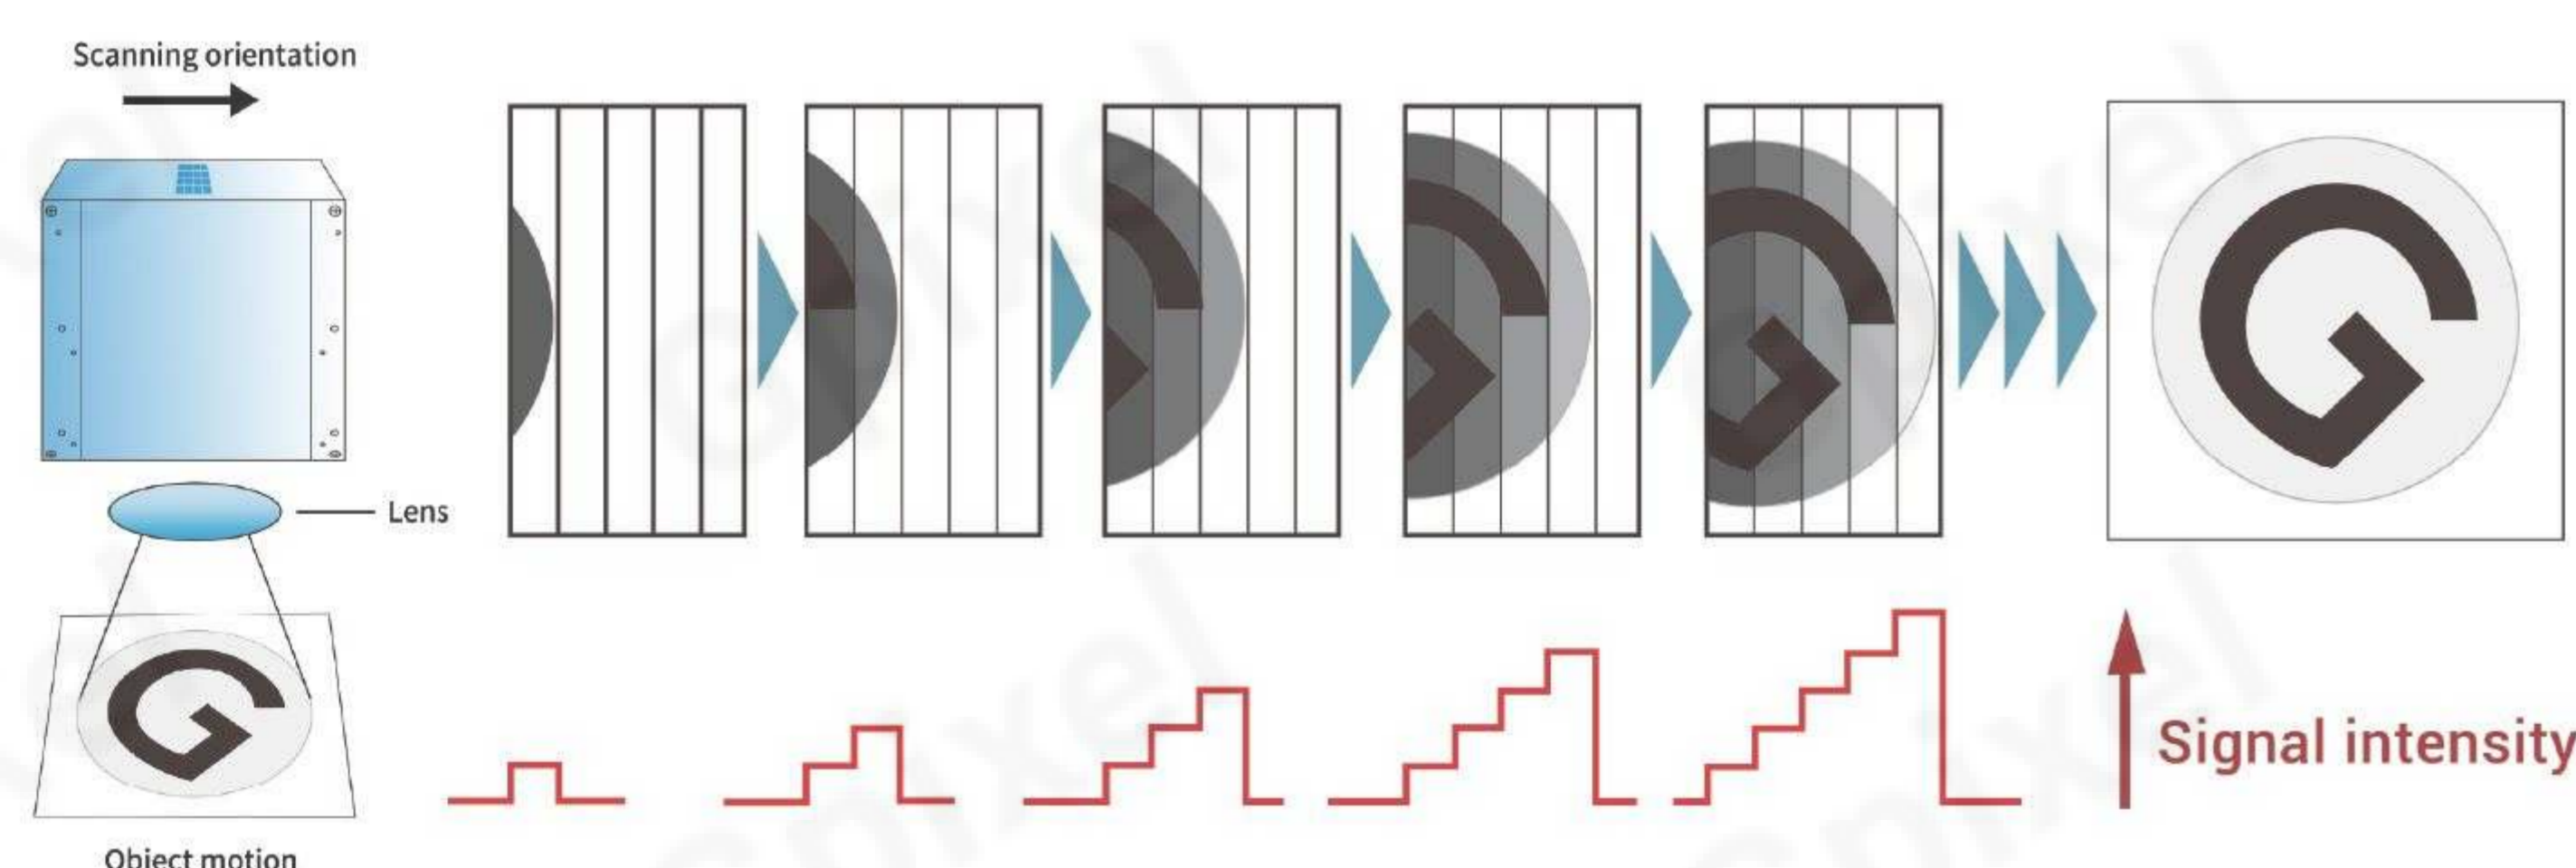


**G** Backside-illumination

- Gpixel's self-developed backside-illumination technology achieves peak quantum efficiency over 95%.
- The spectral range can be extended from the ultraviolet to the near infrared.
- The addition of Gpixel's Pulsar technology extends the range into the soft xray region.

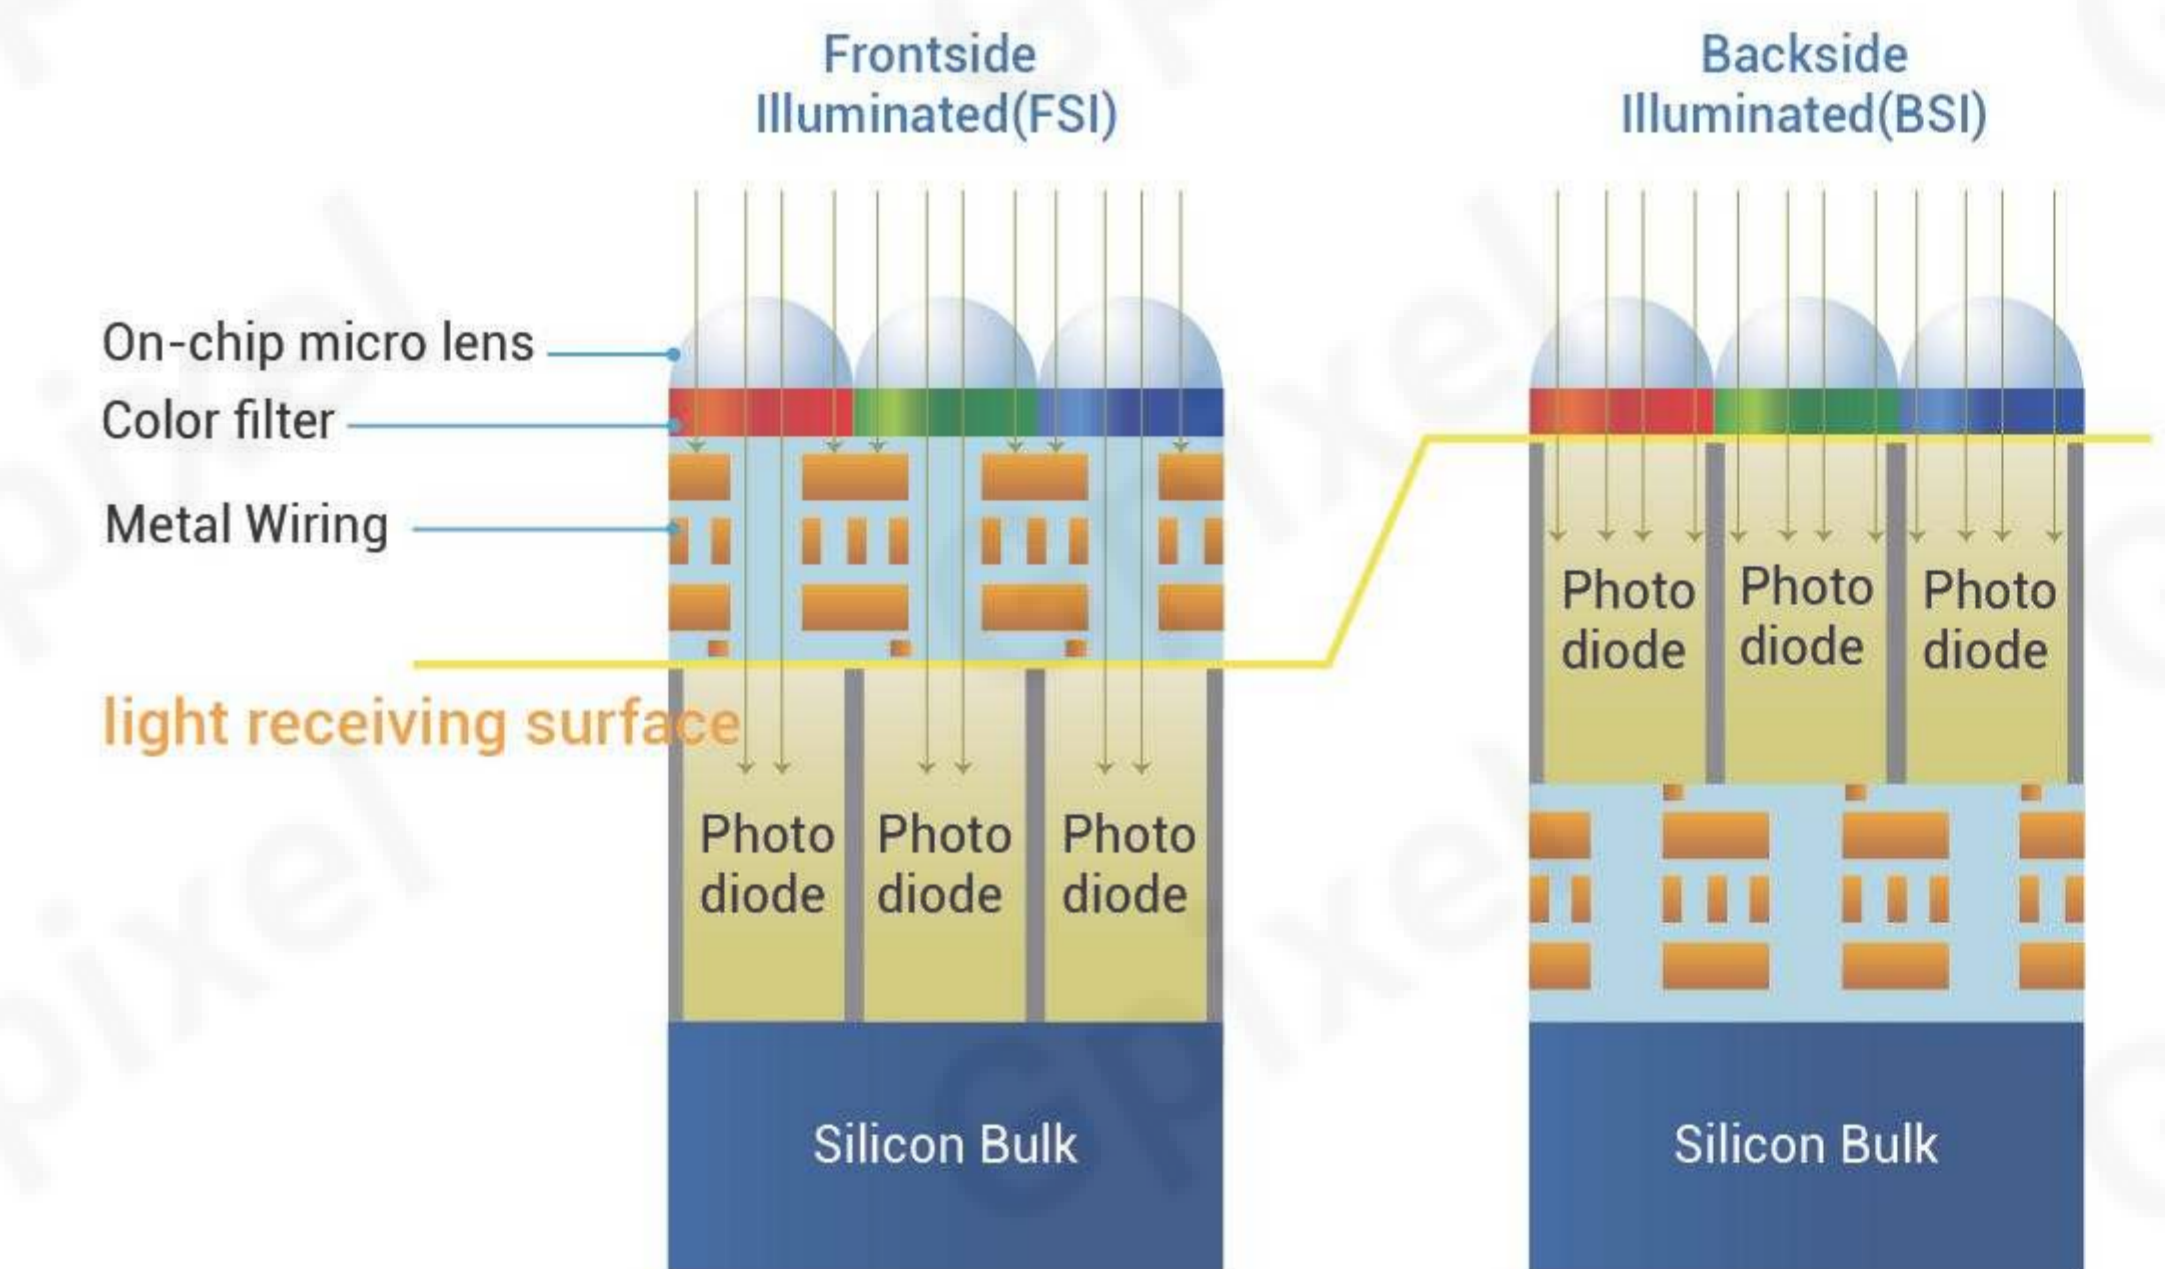


**G** Advanced Wafer Stacking

- Pixels and supporting circuits are independently designed and the separate wafers are bonded together through copper interconnections.
- Stacked chip architectures provide small size, fast read-out rate and high integration.

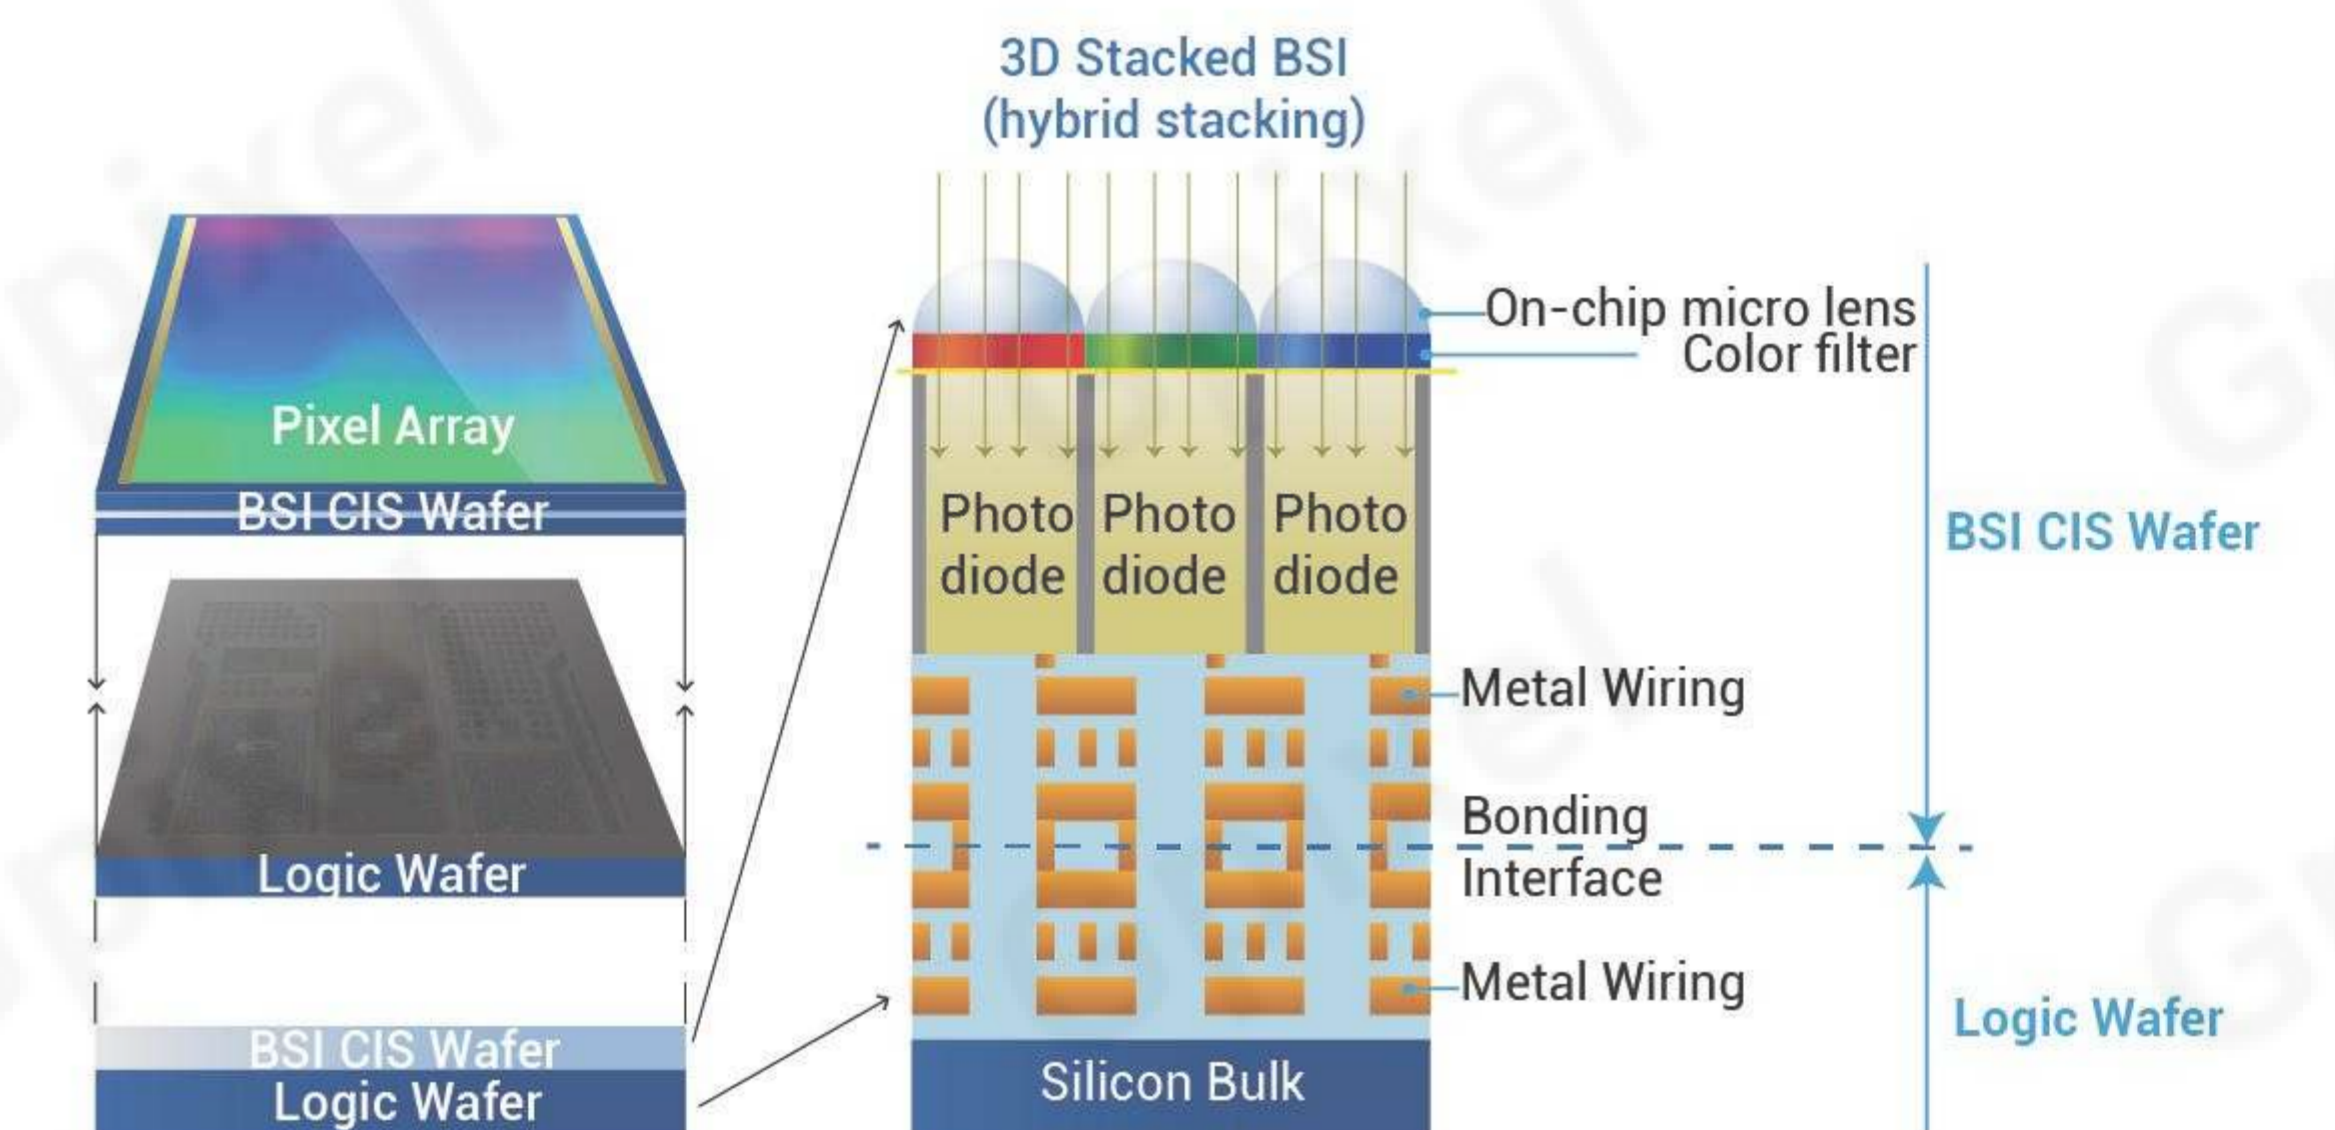


**G** Large-Area and High-Resolution Chip Design










- Breaks through the lithography limit of 24 mm x 32 mm in a single pass.
- Related design expertise allows for stitching of even dense pixel designs with minimization of boundary artifacts.

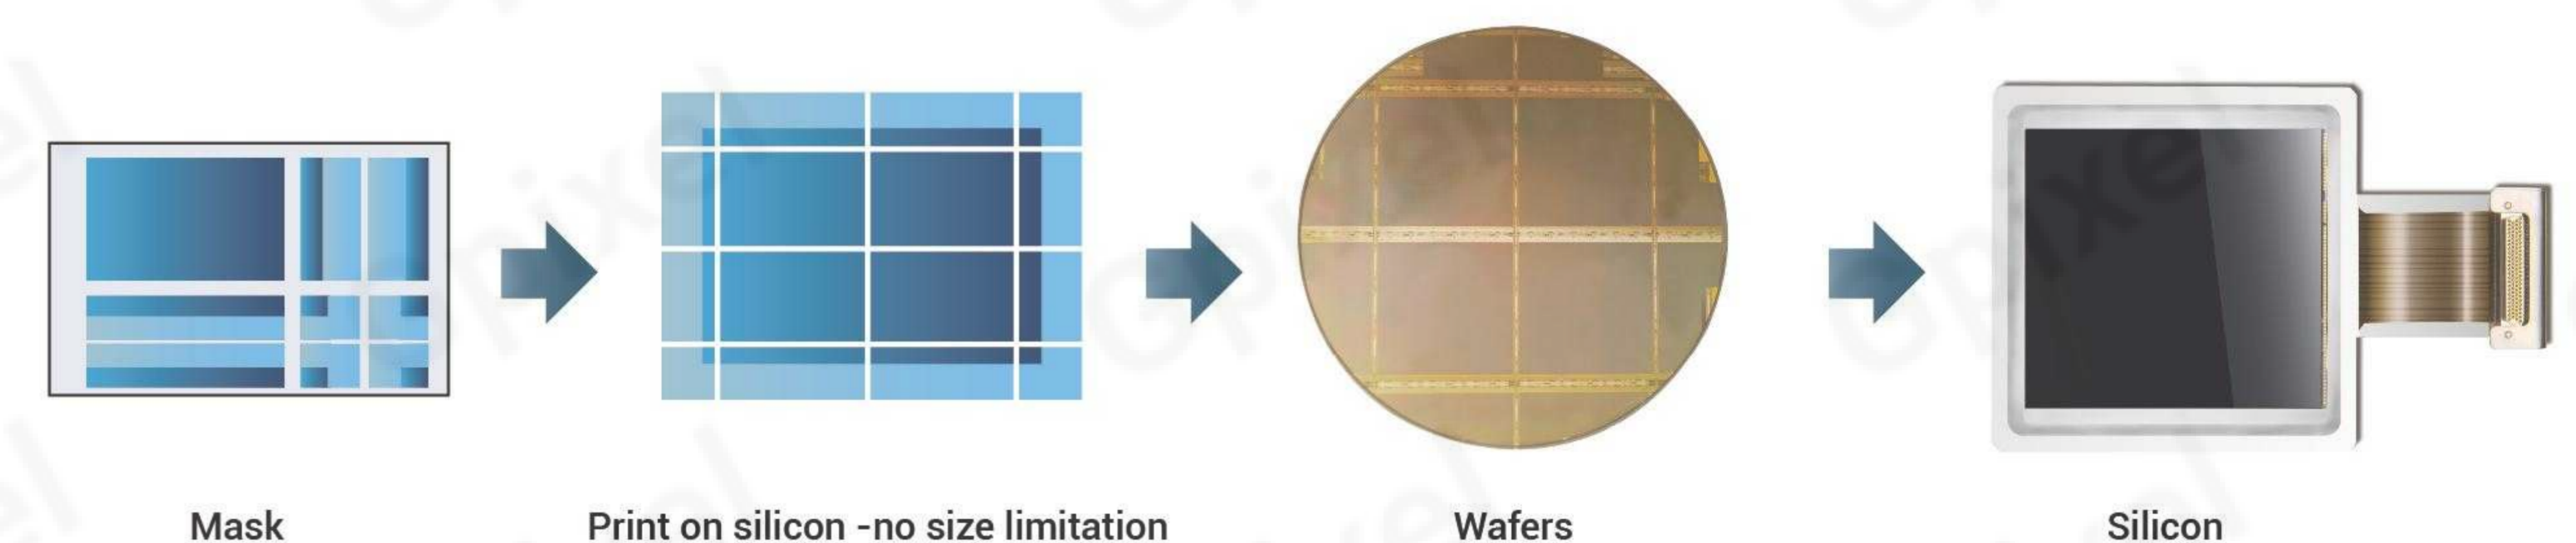

# Applications

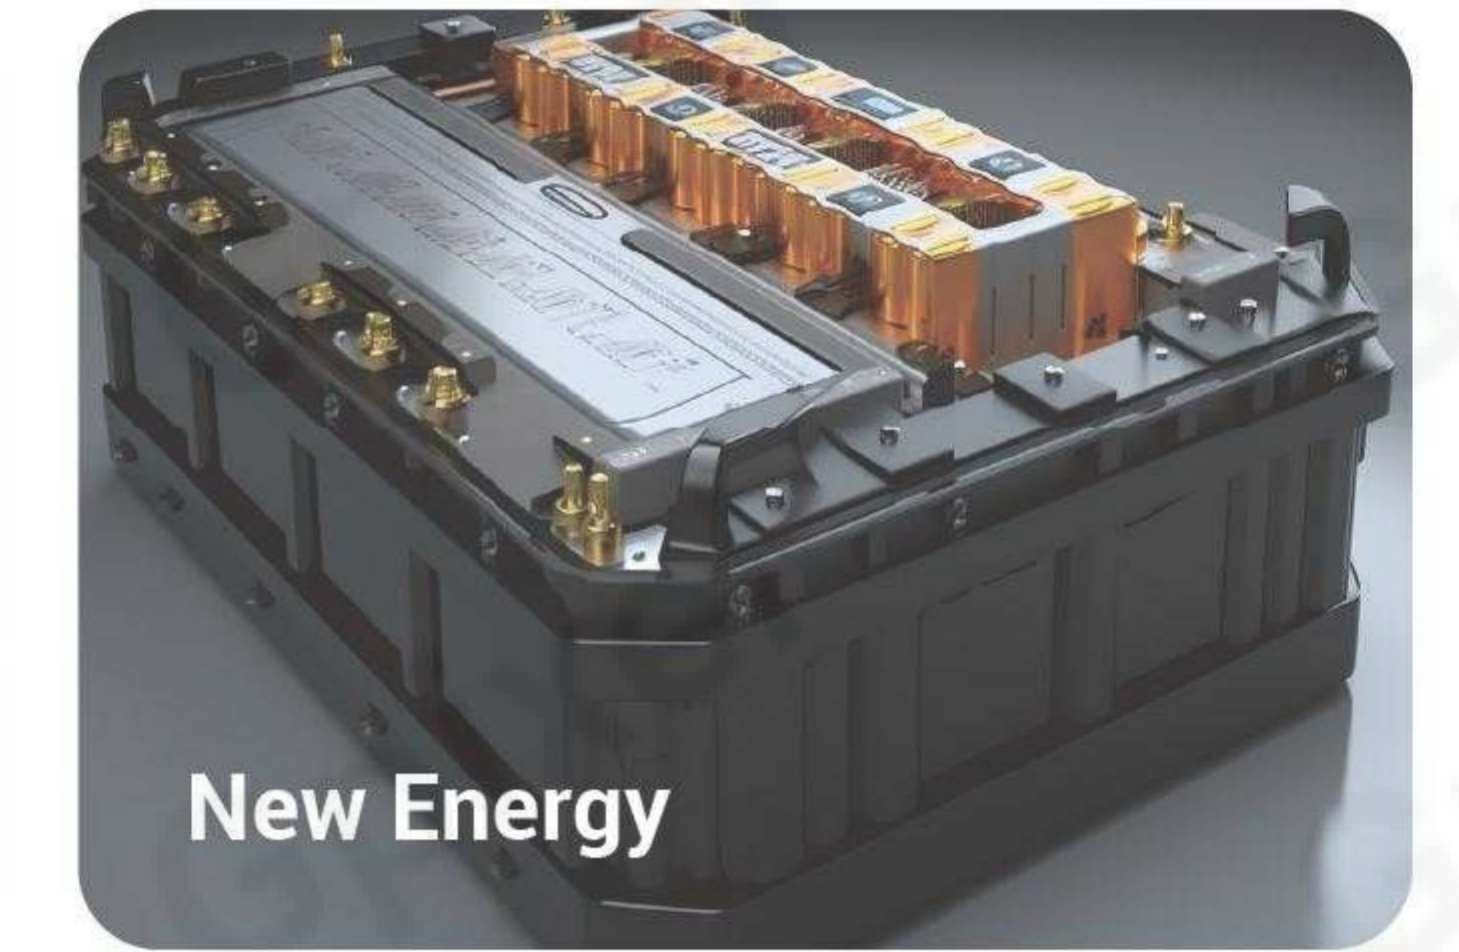

### Advanced CMOS Image Sensors

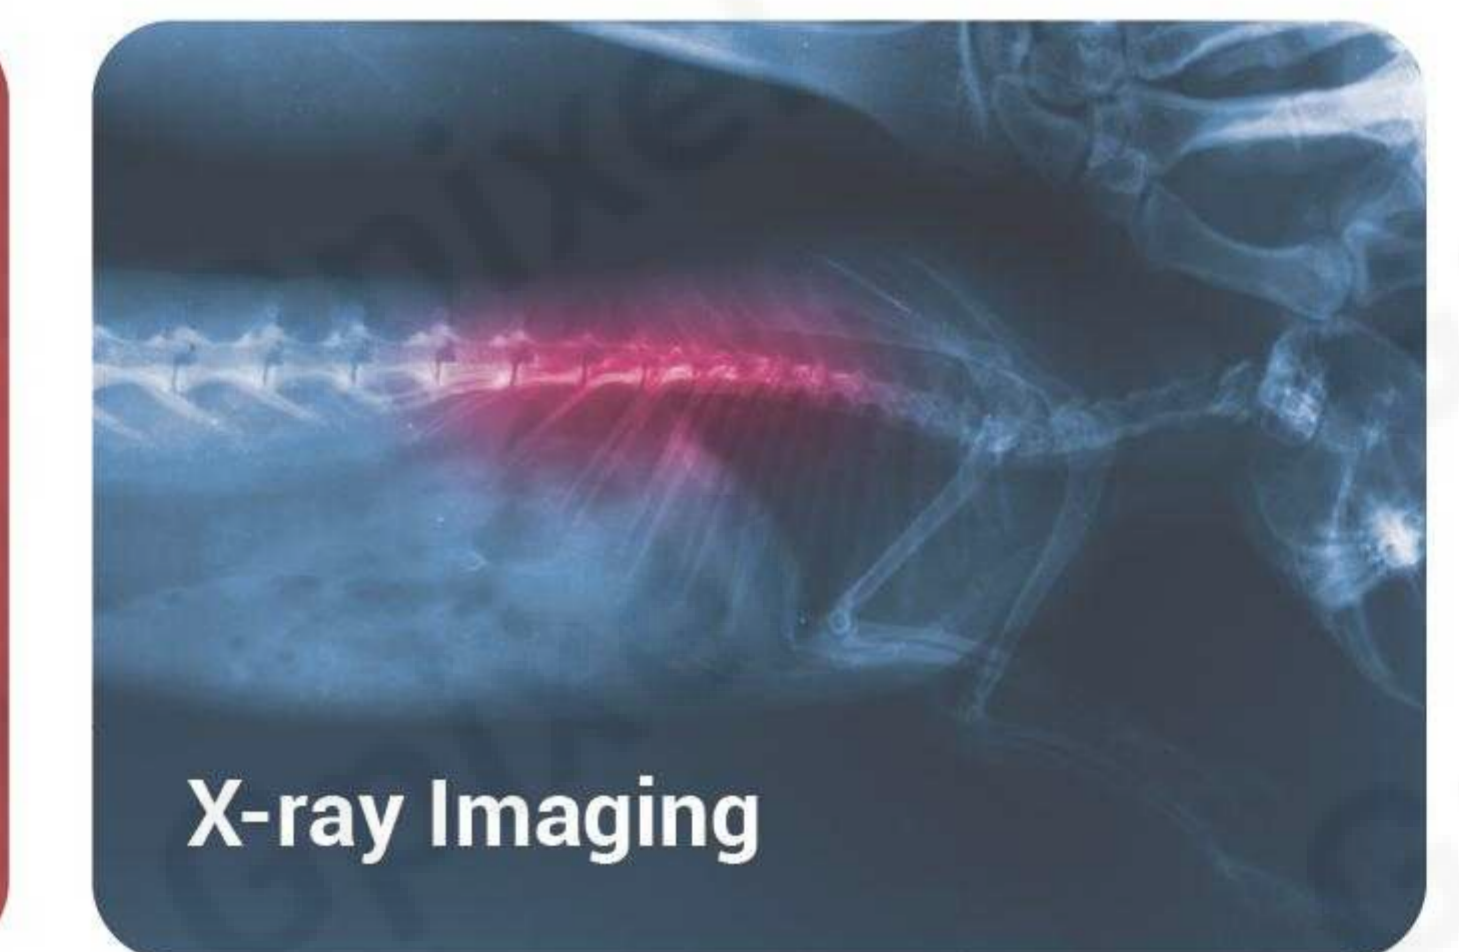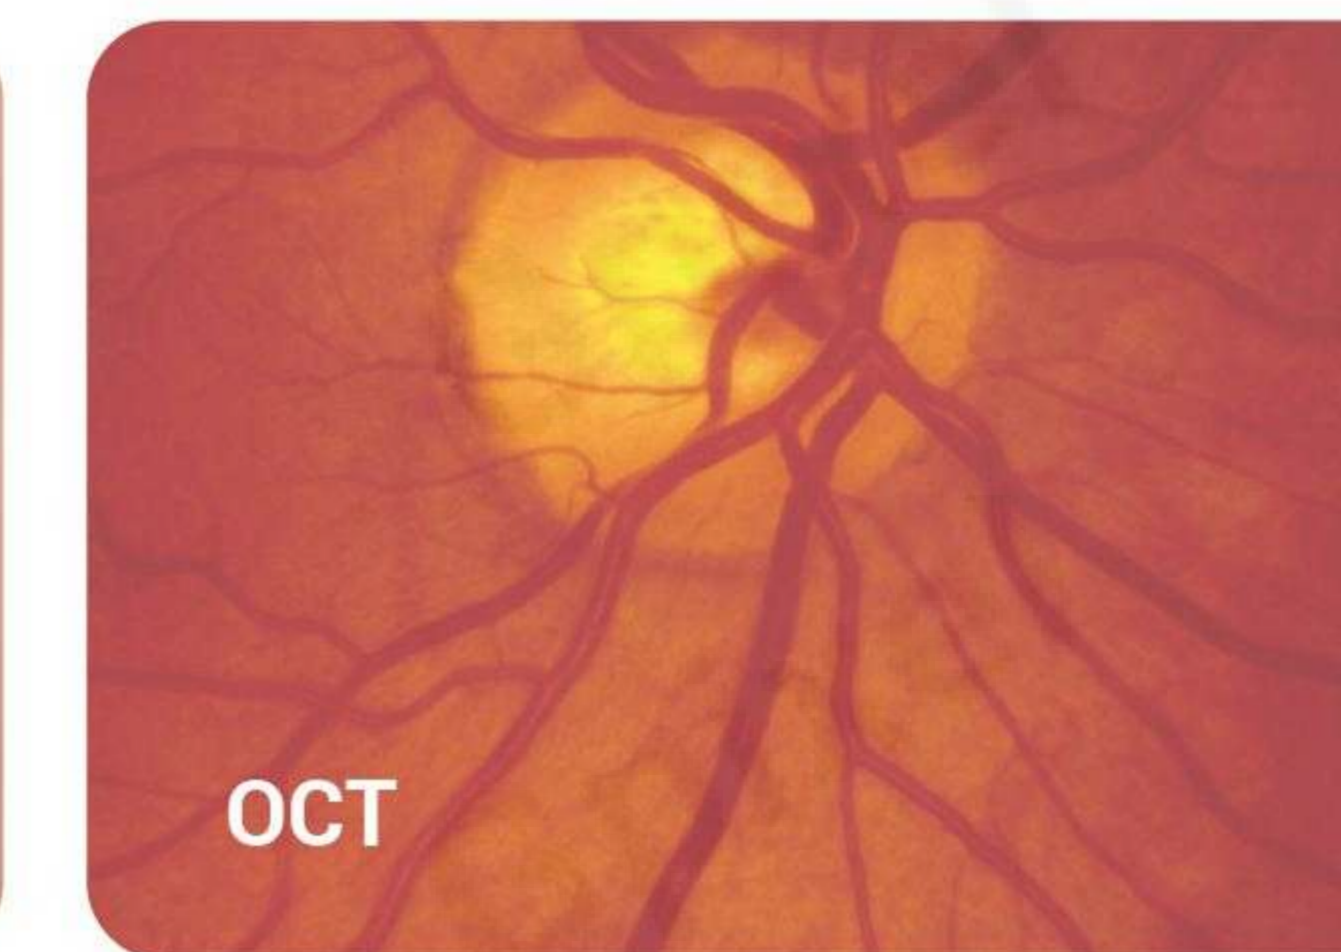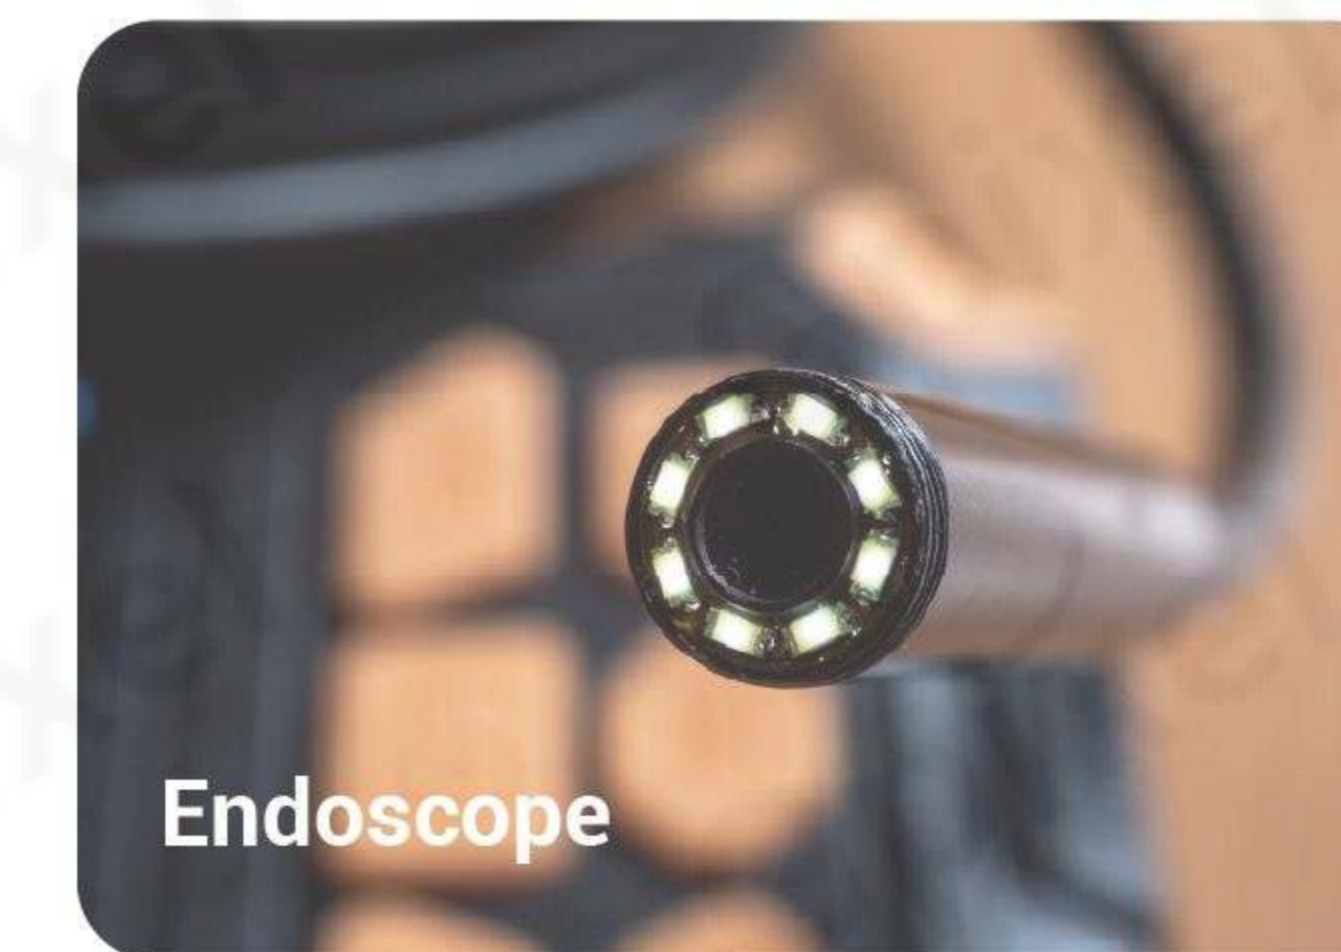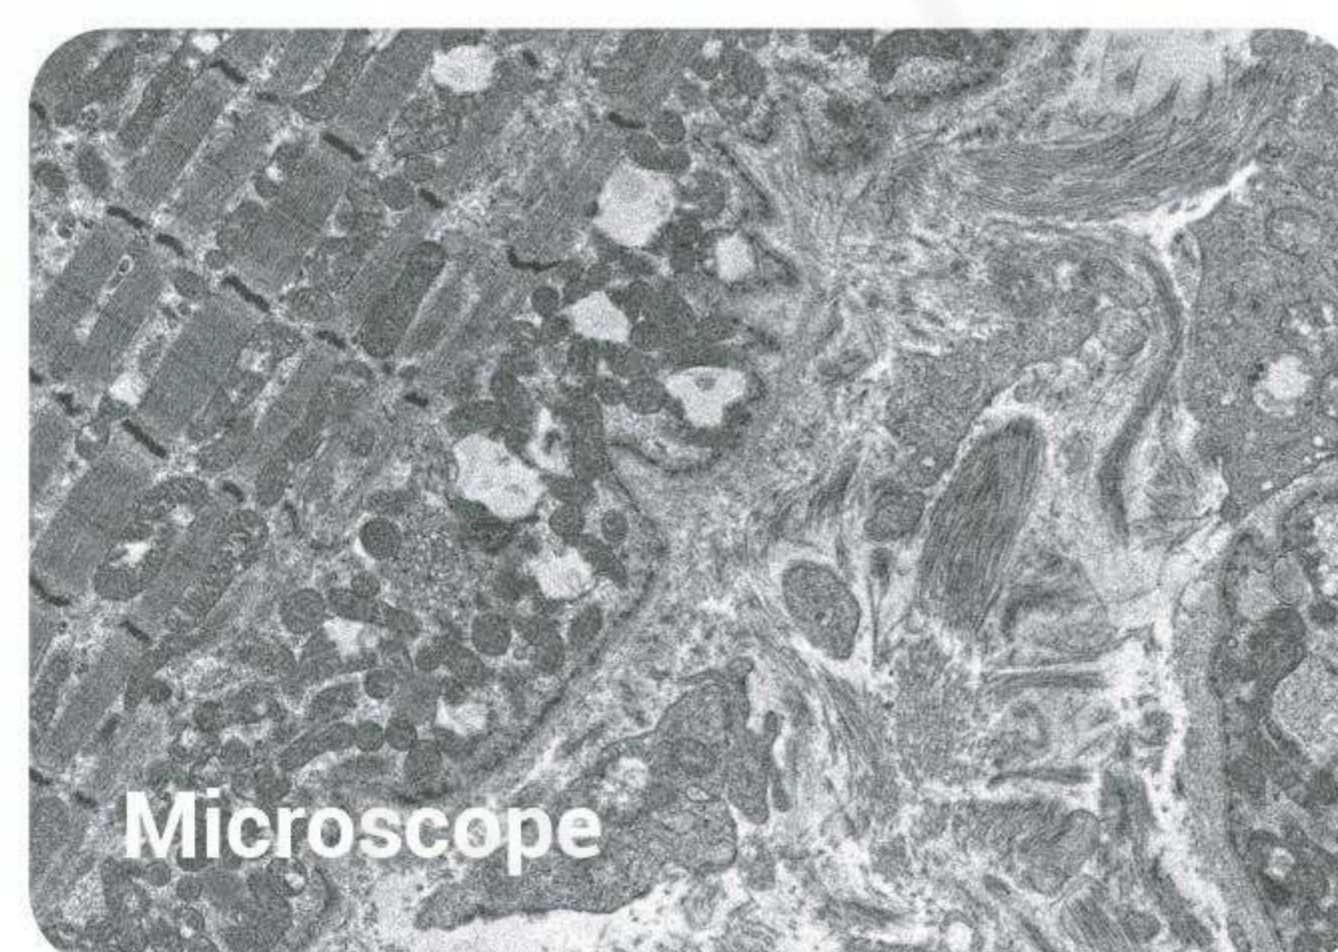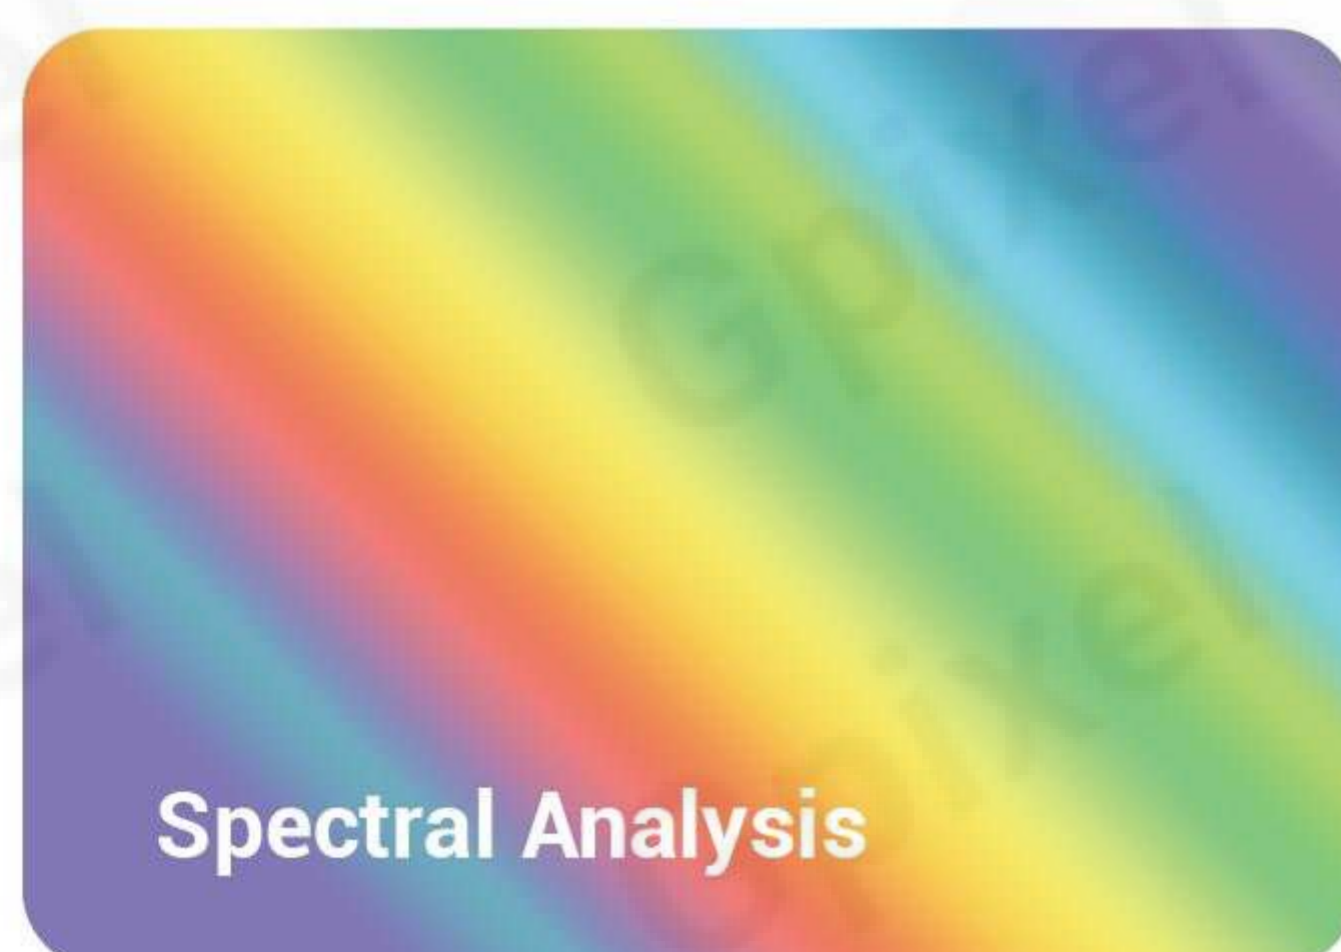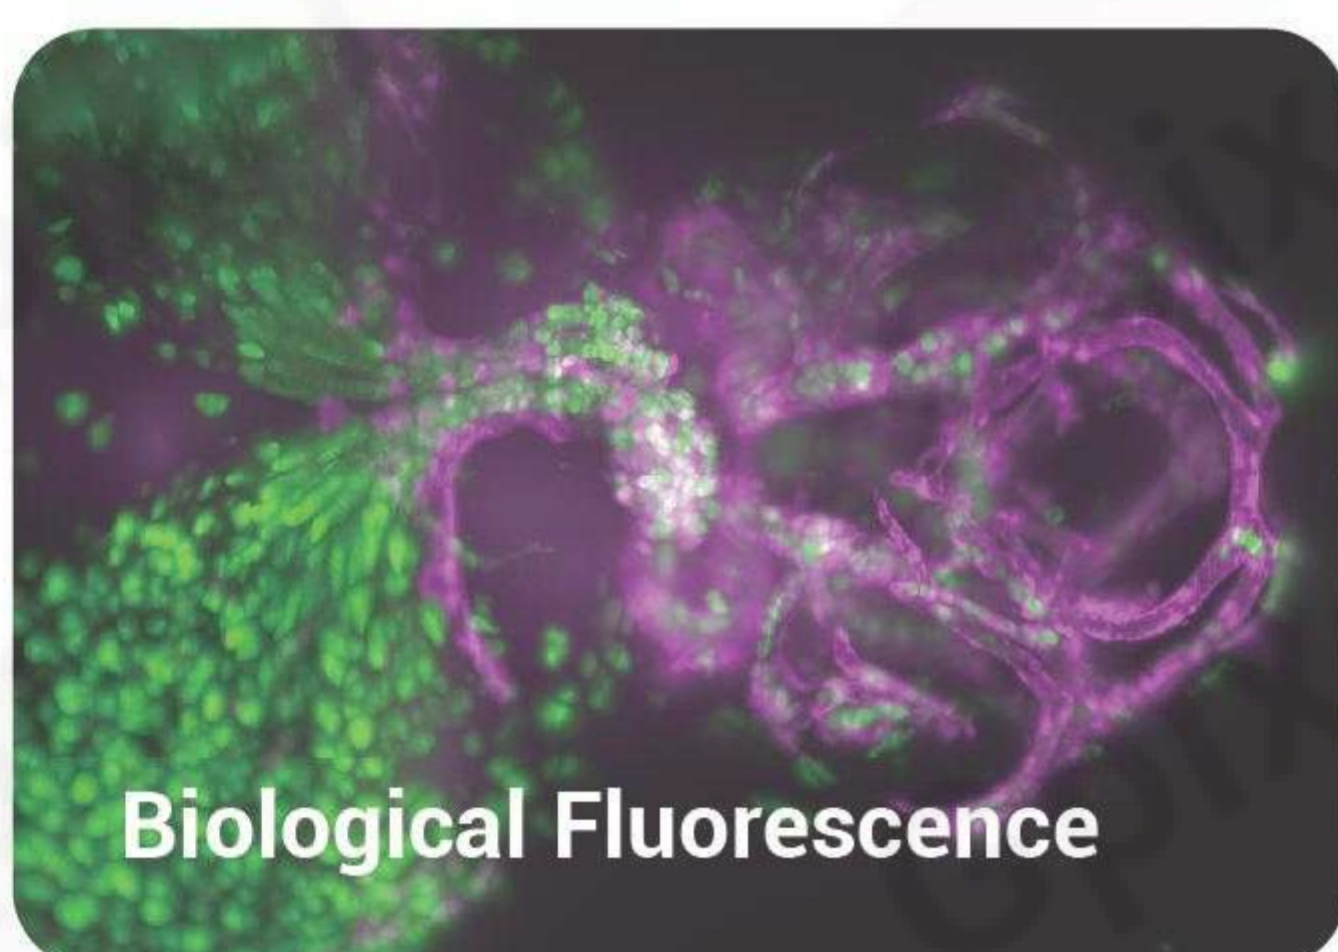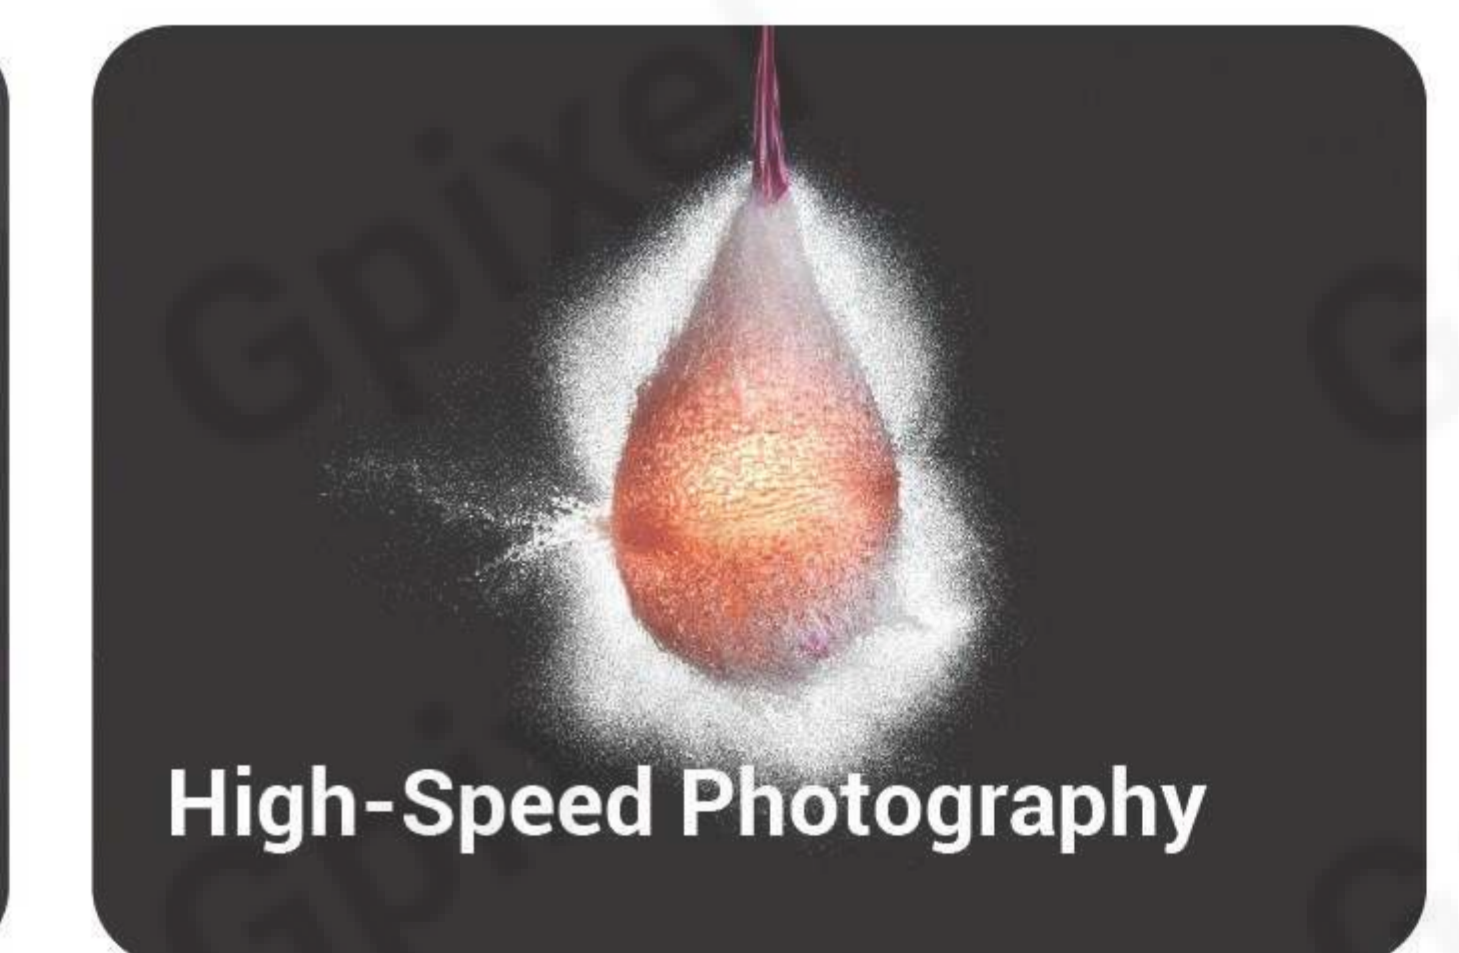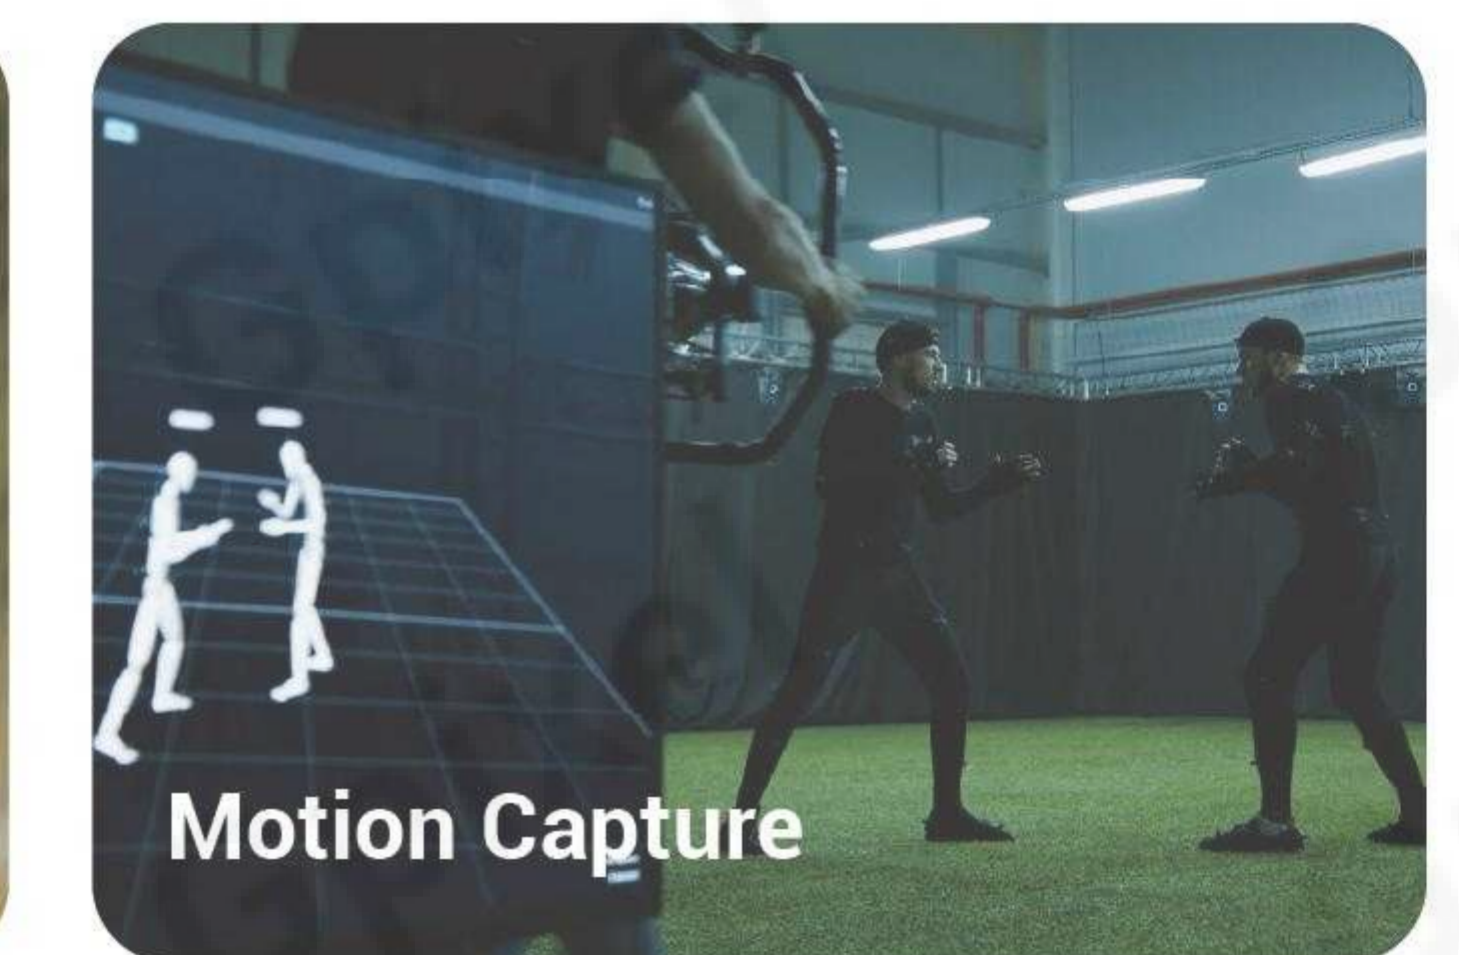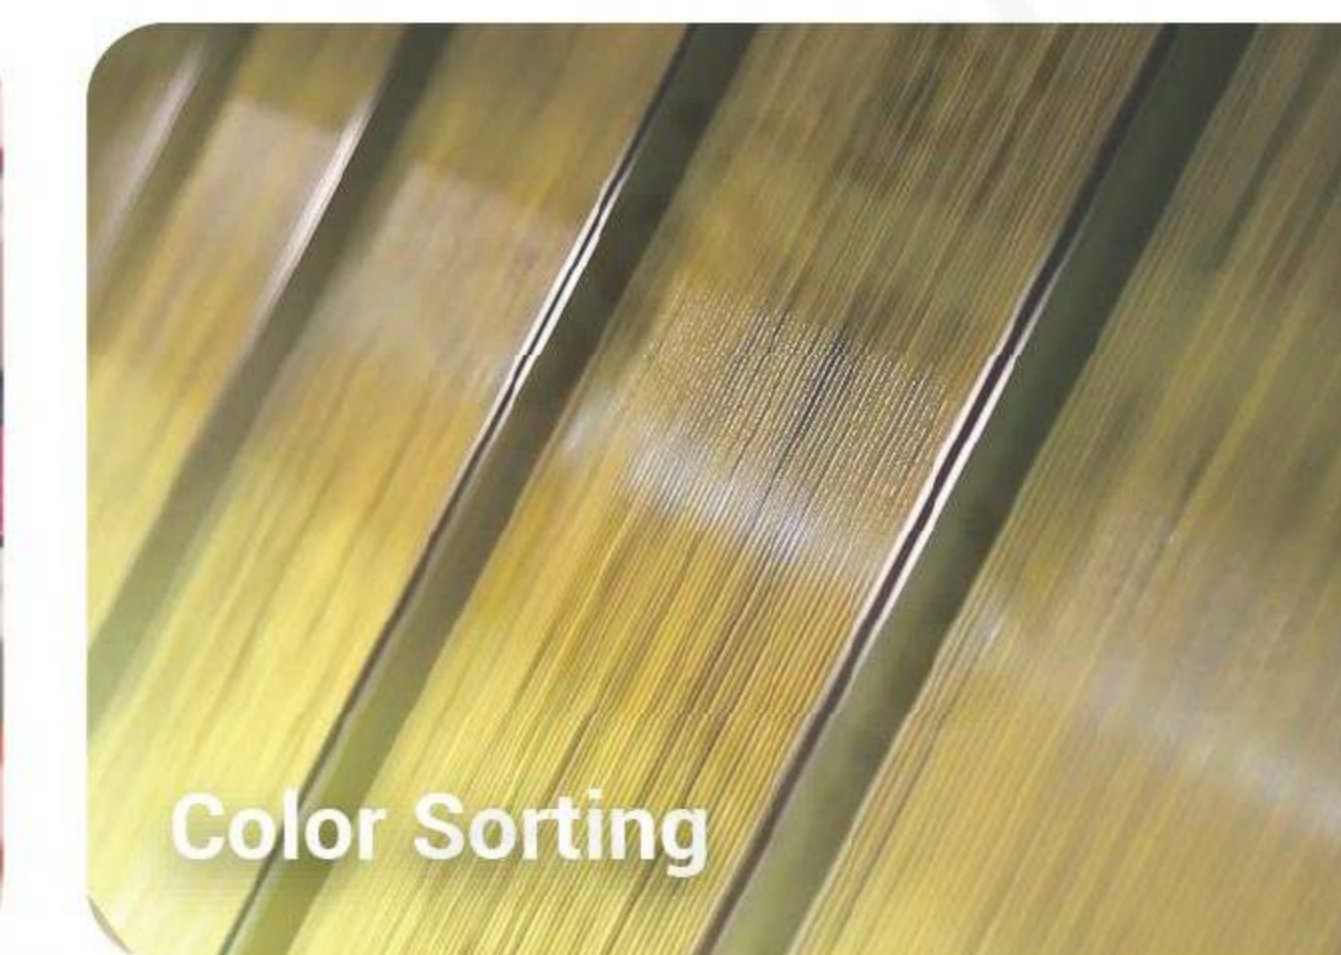

# Product Contents


9 families of standard products, meeting the needs of multiple industries



**GMAX**

- |             |              |
|-------------|--------------|
| GMAX4002    | GMAX3405     |
| GMAX2505    | GMAX2509     |
| GMAX3809    | GMAX3412     |
| GMAX4416    | GMAX2518     |
| GMAX2424BSI | GMAX0505     |
| GMAX4651    | GMAX3265     |
| GMAX32103   | GMAX64104    |
| GMAX32152   | GMAX15271BSI |


**11-28**

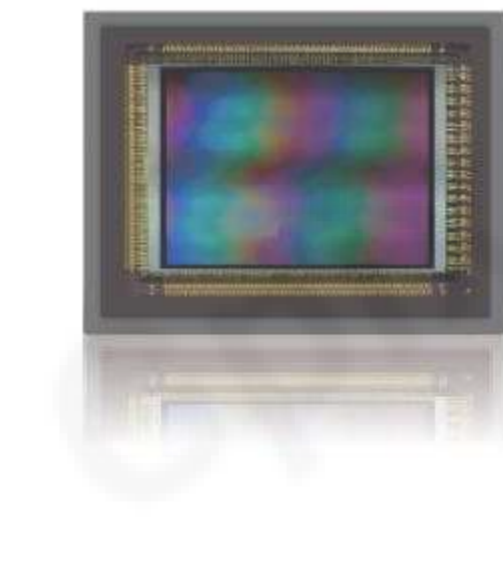

**GCINE**

- GCINE3243
- GCINE4349

**59-62**

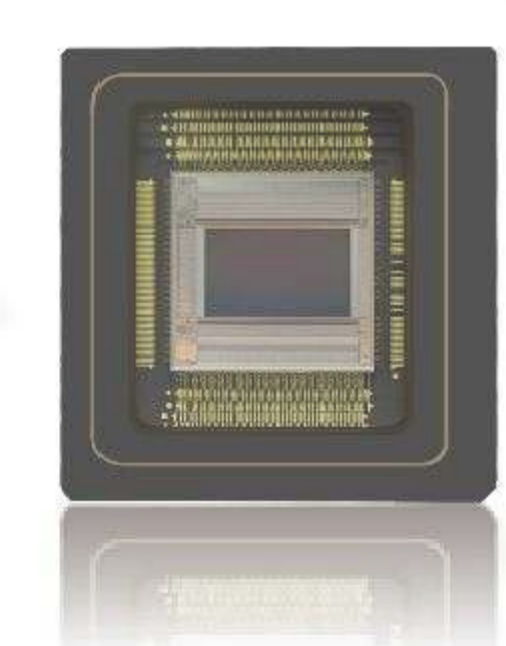

**GSPRINT**

- GSPRINT2001BSI
- GSPRINT6502BSI
- GSPRINT4502
- GSPRINT4510
- GSPRINT5514BSI
- GSPRINT4521


**28-36**



**GL**

- |              |              |
|--------------|--------------|
| GLR1205BSI-S | GLR1202BSI-L |
| GLR1402BSI-M | GL1402       |
| GLR1002BSI-S | GL3504       |
| GL0402       | GL7004       |
| GL0816       | GLT5009BSI   |
| GLT5008BSI   | GLT5016BSI   |
| GL7008       | GL3516       |


**63-78**

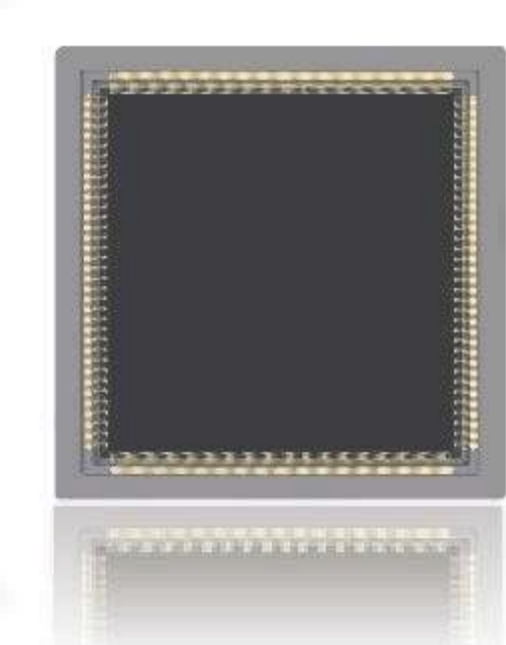

**GSENSE**

- |                |               |
|----------------|---------------|
| GSENSE2020BSI  | GSENSE6504BSI |
| GSENSE400BSI   | GSENSE4040BSI |
| GSENSE6060     | GSENSE6060BSI |
| GSENSE3243BSI  | GSENSE6510BSI |
| GSENSE1081BSI  | GSENSE1517BSI |
| GSENSE64105BSI |               |


**37-50**

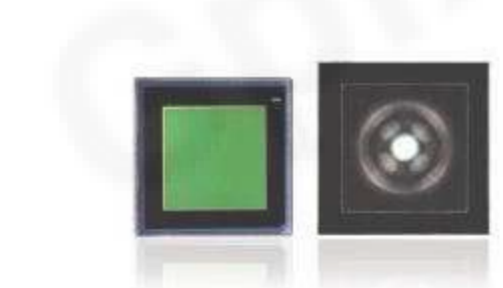

**GXS**

- GXS1508/GXSM1508


**79-82**

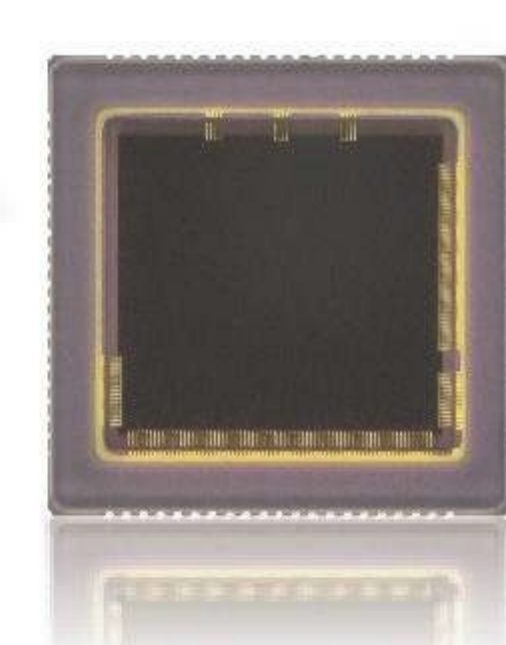

**GLUX**

- GLUX9701BSI
- GLUX1605BSI


**51-54**

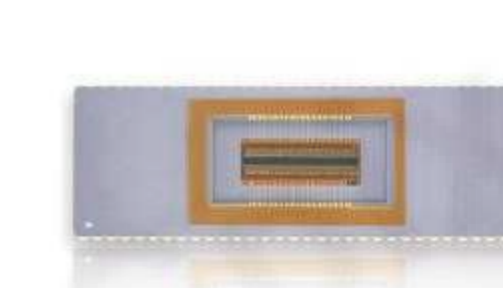

**GIR**

- GIR1201/GIR2505

**83-86**

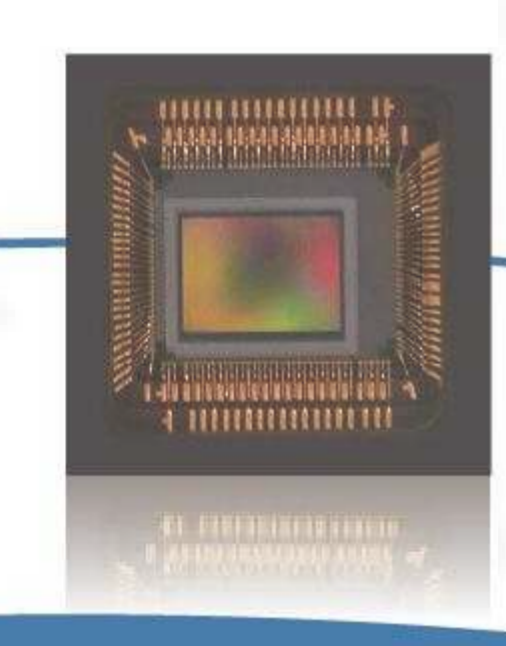

**GTOF**

- GTOF0503

**55-58**



**CUSTOM**

- CUSTOM DEDIGN
- SEMI-CUSTOM

**87-88**

[GMAX](#) | [GSPRINT](#) | [GSENSE](#) | [GLUX](#) | [GTOF](#) | [GCINE](#) | [GL](#) | [GXS](#) | [GIR](#)

## Area Scan CMOS Image Sensor

GMAX is Gpixel's global shutter sensor family, designed to take full advantage of high-speed industrial camera interfaces while providing the performance and features required for imaging-as-measurement applications like factory inspection, automation, traffic monitoring and aerial mapping. In the GMAX portfolio, Gpixel offers global shutter pixel sizes ranging from 1.5  $\mu\text{m}$  to 6.4  $\mu\text{m}$  and resolutions from 2.4 MP to 271 MP. Four C-Mount compatible sensors utilizing a 2.5  $\mu\text{m}$  pixel are pin and footprint compatible for easy integration.

GMAX4002	GMAX3405	GMAX2505	GMAX2509	GMAX3809
GMAX3412	GMAX4416	GMAX2518	GMAX2424BSI	GMAX0505
GMAX4651	GMAX3265	GMAX32103	GMAX32152	GMAX64104
GMAX15271BSI				

### Product Family Features

- Global Shutter
- 2.4 MP-271 MP
- 1/1.7"-Medium
- High Speed


### Applications

- Automation & Inspection
- Video Broadcasting
- Traffic & Transportation
- Medical Imaging



# GMAX4002

## 2.4MP GLOBAL SHUTTER CMOS IMAGE SENSOR

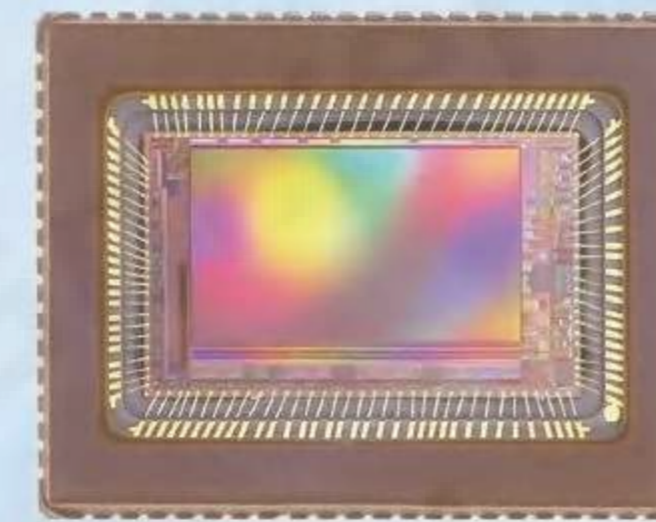

**GMAX4002** is a 1/1.7" optical format image sensor with 2048 x 1200 effective pixels. Featuring an advanced charge domain global shutter pixel, GMAX4002 operates with true CDS for low noise and high dynamic range. Gpixel's Red Fox technology is employed to deliver enhanced QE for NIR applications. GMAX4002 is configurable through I<sup>2</sup>C. It integrates both sub-LVDS and MIPI interfaces, for frame rates of 344 fps and 166 fps respectively. GMAX4002 supports 2x2 on-chip binning to achieve higher sensitivity and faster frame rate. It includes an on-chip sequencer and OTP functions. Assembled with a 74 pins CLCC package, GMAX4002 enables a cost-effective camera solution, easy integration and high-reliability mass production.

### Key Features and Benefits


- NIR Enhanced
- Low Noise Global Shutter
- On-chip Sequencer
- MIPI and Sub-LVDS Data Interfaces
- One Time Programmable (OTP) Memory

### Application

- Automation & Inspection
- Logistic & Positioning
- Metrology
- Motion Capture


Specifications			
Nr of Active Pixels	2048(H) x 1200(V)	Optical Format	1/1.7"
Pixel Size	4 μm x 4 μm	Photosensitive Area	8.2 mm x 4.8 mm
Shutter Type	Global shutter	Parasitic Light Sensitivity	<-92 dB
Full Well Capacity	11.6 ke <sup>-</sup> (12 bit,PGA gain 1.0x),11.0 ke <sup>-</sup> (12 bit,PGA gain 1.0x)	Peak QE	73.7% (550 nm)
Temporal Noise	2.6 e <sup>-</sup> (12 bit,PGA gain 3.8x),2.9 e <sup>-</sup> (10 bit,PGA gain 3.8x)	Angular Response	>15° (80% Response)
Dark Current	8.3 e <sup>-</sup> /pixel/s (37°C)	Max. SNR	40.6 dB (PGA gain 1.0x)
Max Frame Rate	344 fps (10 bit,1.2G Sub-LVDS),229 fps (10 bit,800M Sub-LVDS) 195 fps (12 bit,800M Sub-LVDS),166 fps (12 bit,1.2G MIPI)	Dynamic Range	68.0 dB (12 bit,PGA 1.0x) 64.4 dB (10 bit,PGA 1.0x)
Output Format	8 ch Sub-LVDS, 4 ch MIPI	Channel Multiplexing	8/4/2/1 (Sub-LVDS),4/2/1 (MIPI)
ADC	10/12 bit	Max. Data Rate	9.60 Gbps (Sub-LVDS),4.8 Gbps (MIPI)
Chroma	Mono,Mono (NIR enhanced),RGB Color	Power Consumption	<0.5 W
Supply Voltage	3.3 V (analog),1.8 V – 3.3 V (IO),1.2 V (digital)	Package	74 pins CLCC (16.6 mm x 12.9 mm)

### Package Drawing

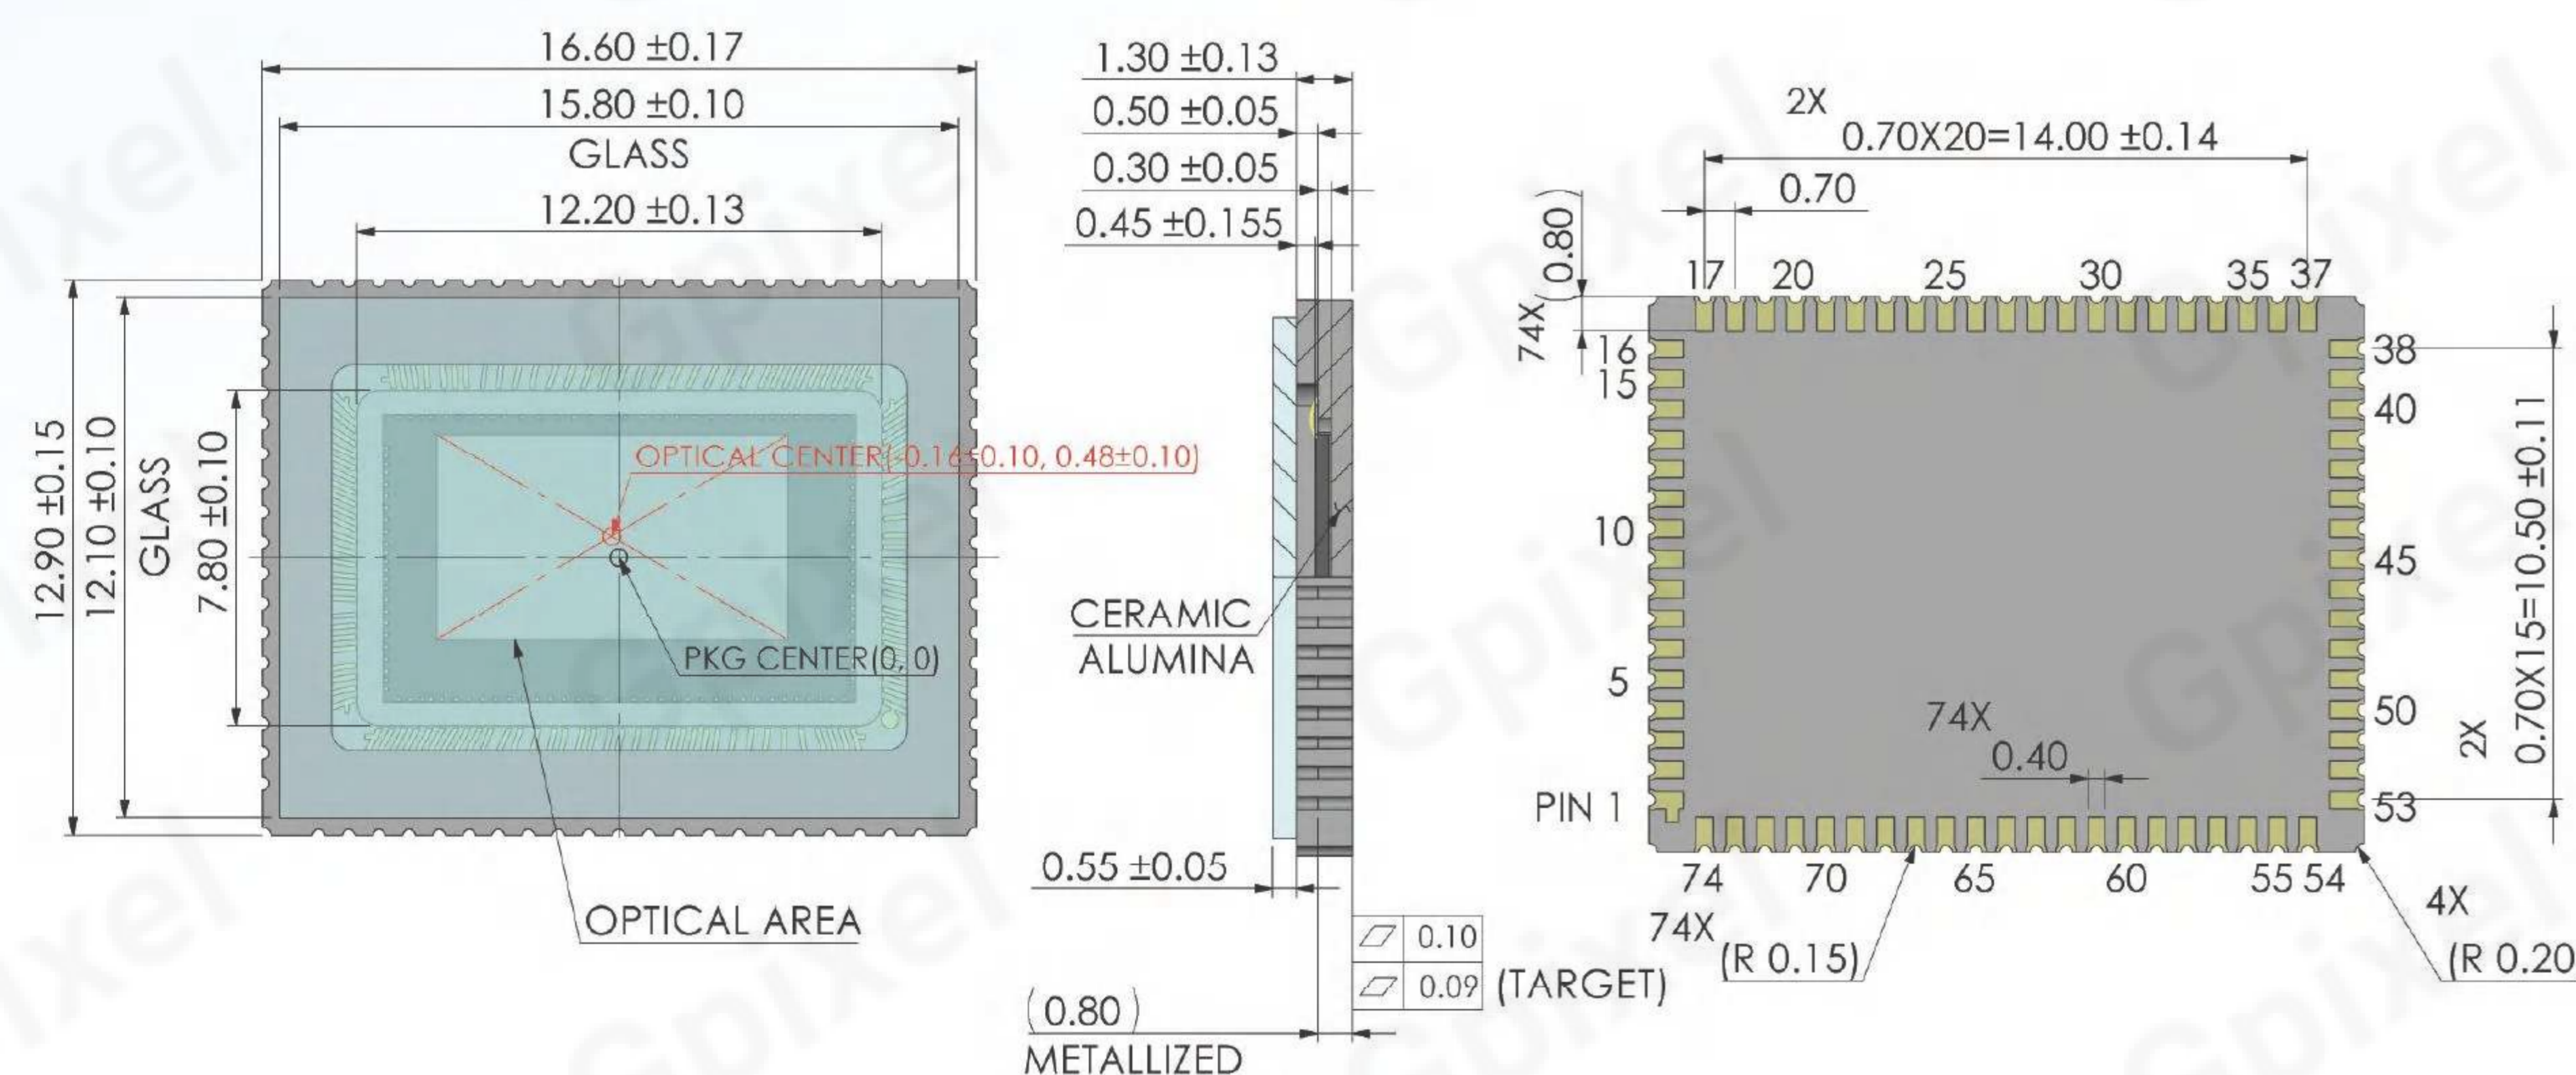

# GMAX3405

## 5MP GLOBAL SHUTTER CMOS IMAGE SENSOR

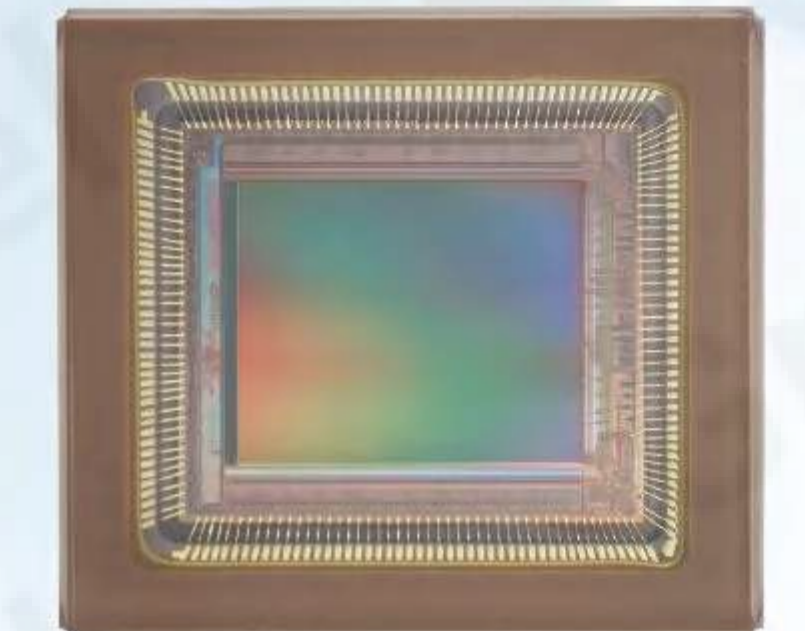

**GMAX3405** is a 2/3" optical format CMOS image sensor with 2448 x 2048 effective pixels and frame rates up to 164/100 fps in 10/12 bit mode with sub-LVDS interface and 73 fps over the 4 alternative MIPI DPHY channels. Based on a high-performance 3.4 μm charge-domain global shutter pixel, GMAX3405 achieves a maximum full well capacity of 8.5 ke<sup>-</sup> and minimum dark noise of 1.6 e<sup>-</sup>, delivering 66.9 dB linear dynamic range. Red Fox technology delivers QE of 75% (540 nm), and a NIR QE of 33% (850 nm). GMAX3405 is housed in 176 pins ceramic LGA package, 17.6 mm x 15.8 mm outer dimensions, and pin-compatible to GMAX3412. GMAX3405 is configurable through I<sup>2</sup>C or SPI, and supports features such as multislope HDR and short exposure time modes making it an ideal solution for an easy integration into cost-sensitive applications in machine vision, industrial bar code reading, logistics, and traffic.

### Key Features and Benefits


- 5 MP Resolution
- Charge Domain Electronic Global Shutter
- NIR Enhance
- Multi-Slope HDR
- One Time Programmable(OTP) Memory
- Ultra-Short Exposure Time (1us)
- High Speed and Good PLS and Angular Response

### Application

- Automation & Inspection
- Intelligent Transport Systems


Specifications			
Nr of Active Pixels	2448(H) x 2048(V)	Optical Format	2/3"
Pixel Size	3.4 μm x 3.4 μm	Photosensitive Area	8.3 mm x 7.0 mm
Shutter Type	Global shutter	Parasitic Light Sensitivity	-88 dB
Full Well Capacity	8.7 ke <sup>-</sup> (12 bit, PGA gain 1.0x) 8.4 ke <sup>-</sup> (10 bit, PGA gain 1.0x)	Temporal Noise	1.6 e <sup>-</sup> (12 bit, PGA gain 16.8x) 3.0 e <sup>-</sup> (10 bit, PGA gain 2.0x)
Peak QE	75% (540 nm)	Angular Response	>15° (80% Response)
Dark Current	4.4 e <sup>-</sup> /pixel/s (33.9 °C)	Max. SNR	39.3 dB
Dynamic Range	66.9 dB	Max Frame Rate	264 fps
Output Format	12 pairs of Sub-LVDS,4 lanes of MIPI	Channel Multiplexing	12/10/8/6/4/2/1 (Sub-LVDS),4/2/1 (MIPI)
ADC	10/12 bit	Max. Data Rate	14.4 Gbps
Chroma	Mono (NIR enhanced), RGB Color	Power Consumption	<1.0 W
Supply Voltage	3.6 V (pixel), 3.3 V (analog), 1.8 V – 3.3 V (IO), 1.2 V (digital)	Package	CLCC 74 pins (16.6 mm x 12.9 mm)

### Package Drawing

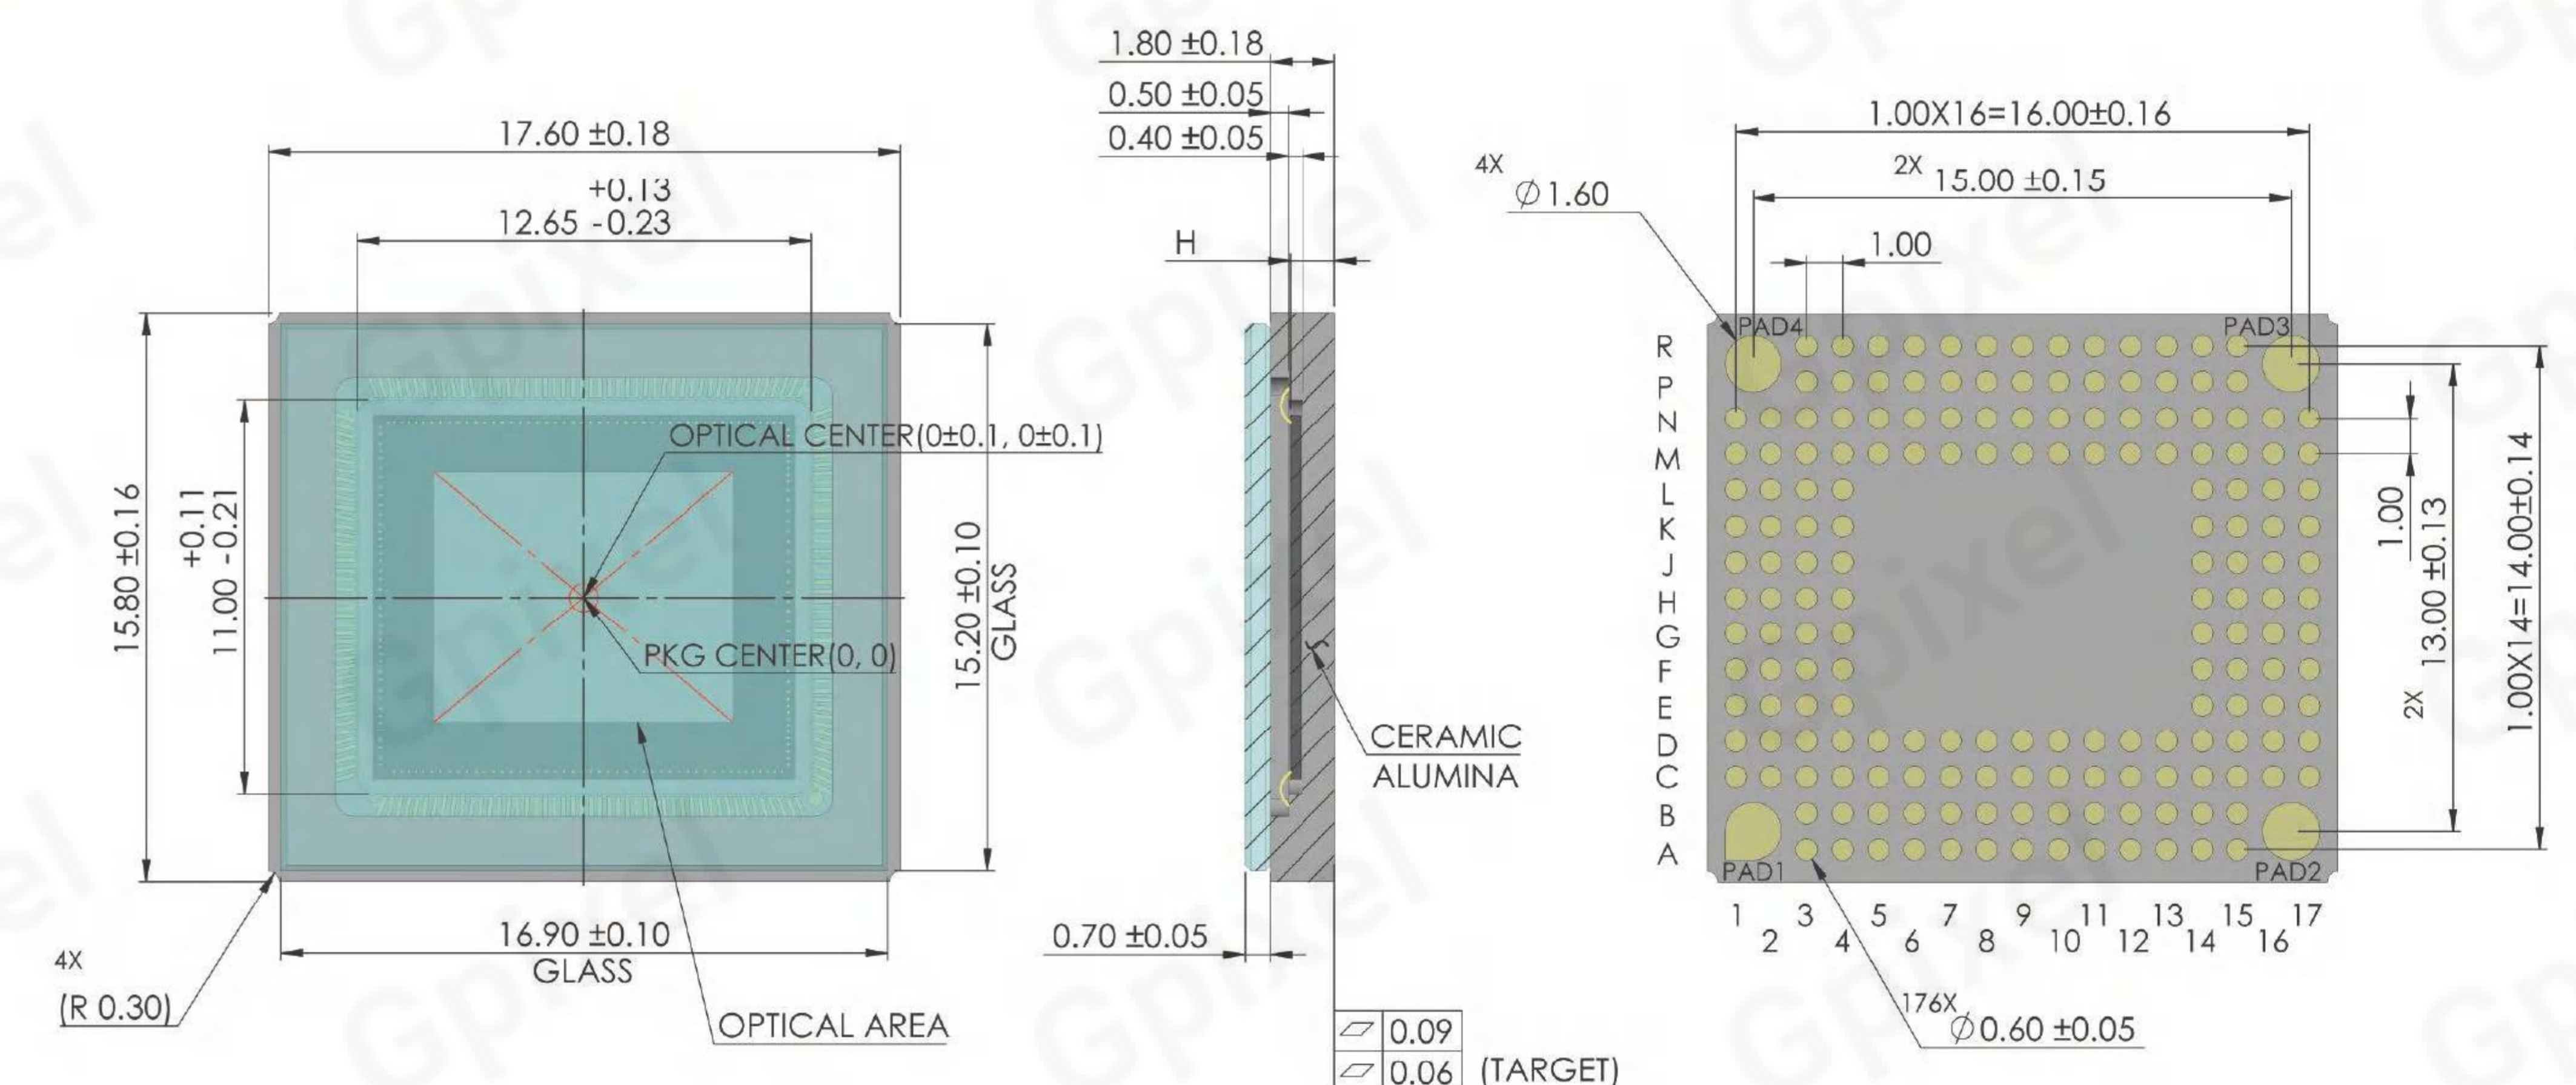

# GMAX2505

## 5MP GLOBAL SHUTTER CMOS IMAGE SENSOR

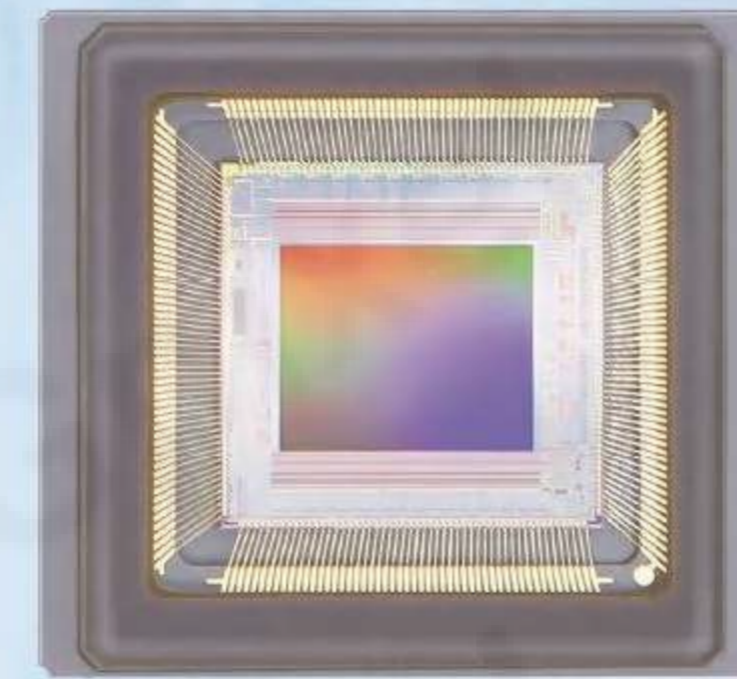

Featured with world smallest charge domain global shutter pixel, GMAX2505 is the new member of GMAX series C-mount line up after GMAX2505. It offers 5 MP (2600 x 2160) resolution in 1/2" optical format, operates with true CDS for low noise and high dynamic range. In addition, it has excellent PLS and angular response thanks to the light pipe technology.

GMAX2505 supports 10 bit and 12 bit output and is offered in two speed variances matching industrial standard camera interface speeds. The full speed version consists of 20 sub-LVDS data output channels each running at maximum 960 MHz, offering full resolution frame rate of 290 fps at 10 bit output and a total data throughput of 19.2 Gbps. The high frame rate increases system throughput for industrial inline inspections and enables precise operation at high speed.

### Key Features and Benefits


- 2.5 μm Global Shutter Pixel
- High Data Throughput up to 19.2 Gbps
- Good PLS and CRA
- High Resolution GS in 1/2" Optical Format
- Low Noise Global Shutter

### Application

- Automation & Inspection
- Logistic & Positioning
- Metrology
- Motion Capture

Specifications			
Nr of Active Pixels	2600(H) x 2160(V)	Optical Format	1/2"
Pixel Size	2.5 μm x 2.5 μm	Photosensitive Area	6.5 mm x 5.4 mm
Shutter Type	Global shutter	Parasitic Light Sensitivity	65.5% (500 nm)
Full Well Capacity	6.7 ke <sup>-</sup> (PGA gain 1.0x)	Temporal Noise	<-80.0 dB
Temporal Noise	1.8 e <sup>-</sup> (12 bit,PGA gain 4x),3.9 e <sup>-</sup> (10 bit,PGA gain 2x)	Angular Response	>13° (80% Response)
Dark Current	1.2 e <sup>-</sup> /pixel/s (30°C)	Max. SNR	38.2 dB (PGA gain 1.0x)
Dynamic Range	65.5 dB (12 bit,PGA gain 2x),62.1 dB (10 bit,PGA gain 2x)	Max Frame Rate	290 fps (10 bit),121 fps (12 bit)
Output Format	20 ch Sub-LVDS	Channel Multiplexing	20/10/8/6/4/2
ADC	10/12 bit	Max. Data Rate	19.20 Gbps
Chroma	Mono & RGB Color	Power Consumption	<0.6 W (12 bit),<0.9 W (10 bit)
Supply Voltage	3.3 V/1.3 V (analog),1.8 V-3.3 V (IO),1.3V (digital)	Package	226 pins LGA (19.0 mm x 17.5 mm)

### Package Drawing

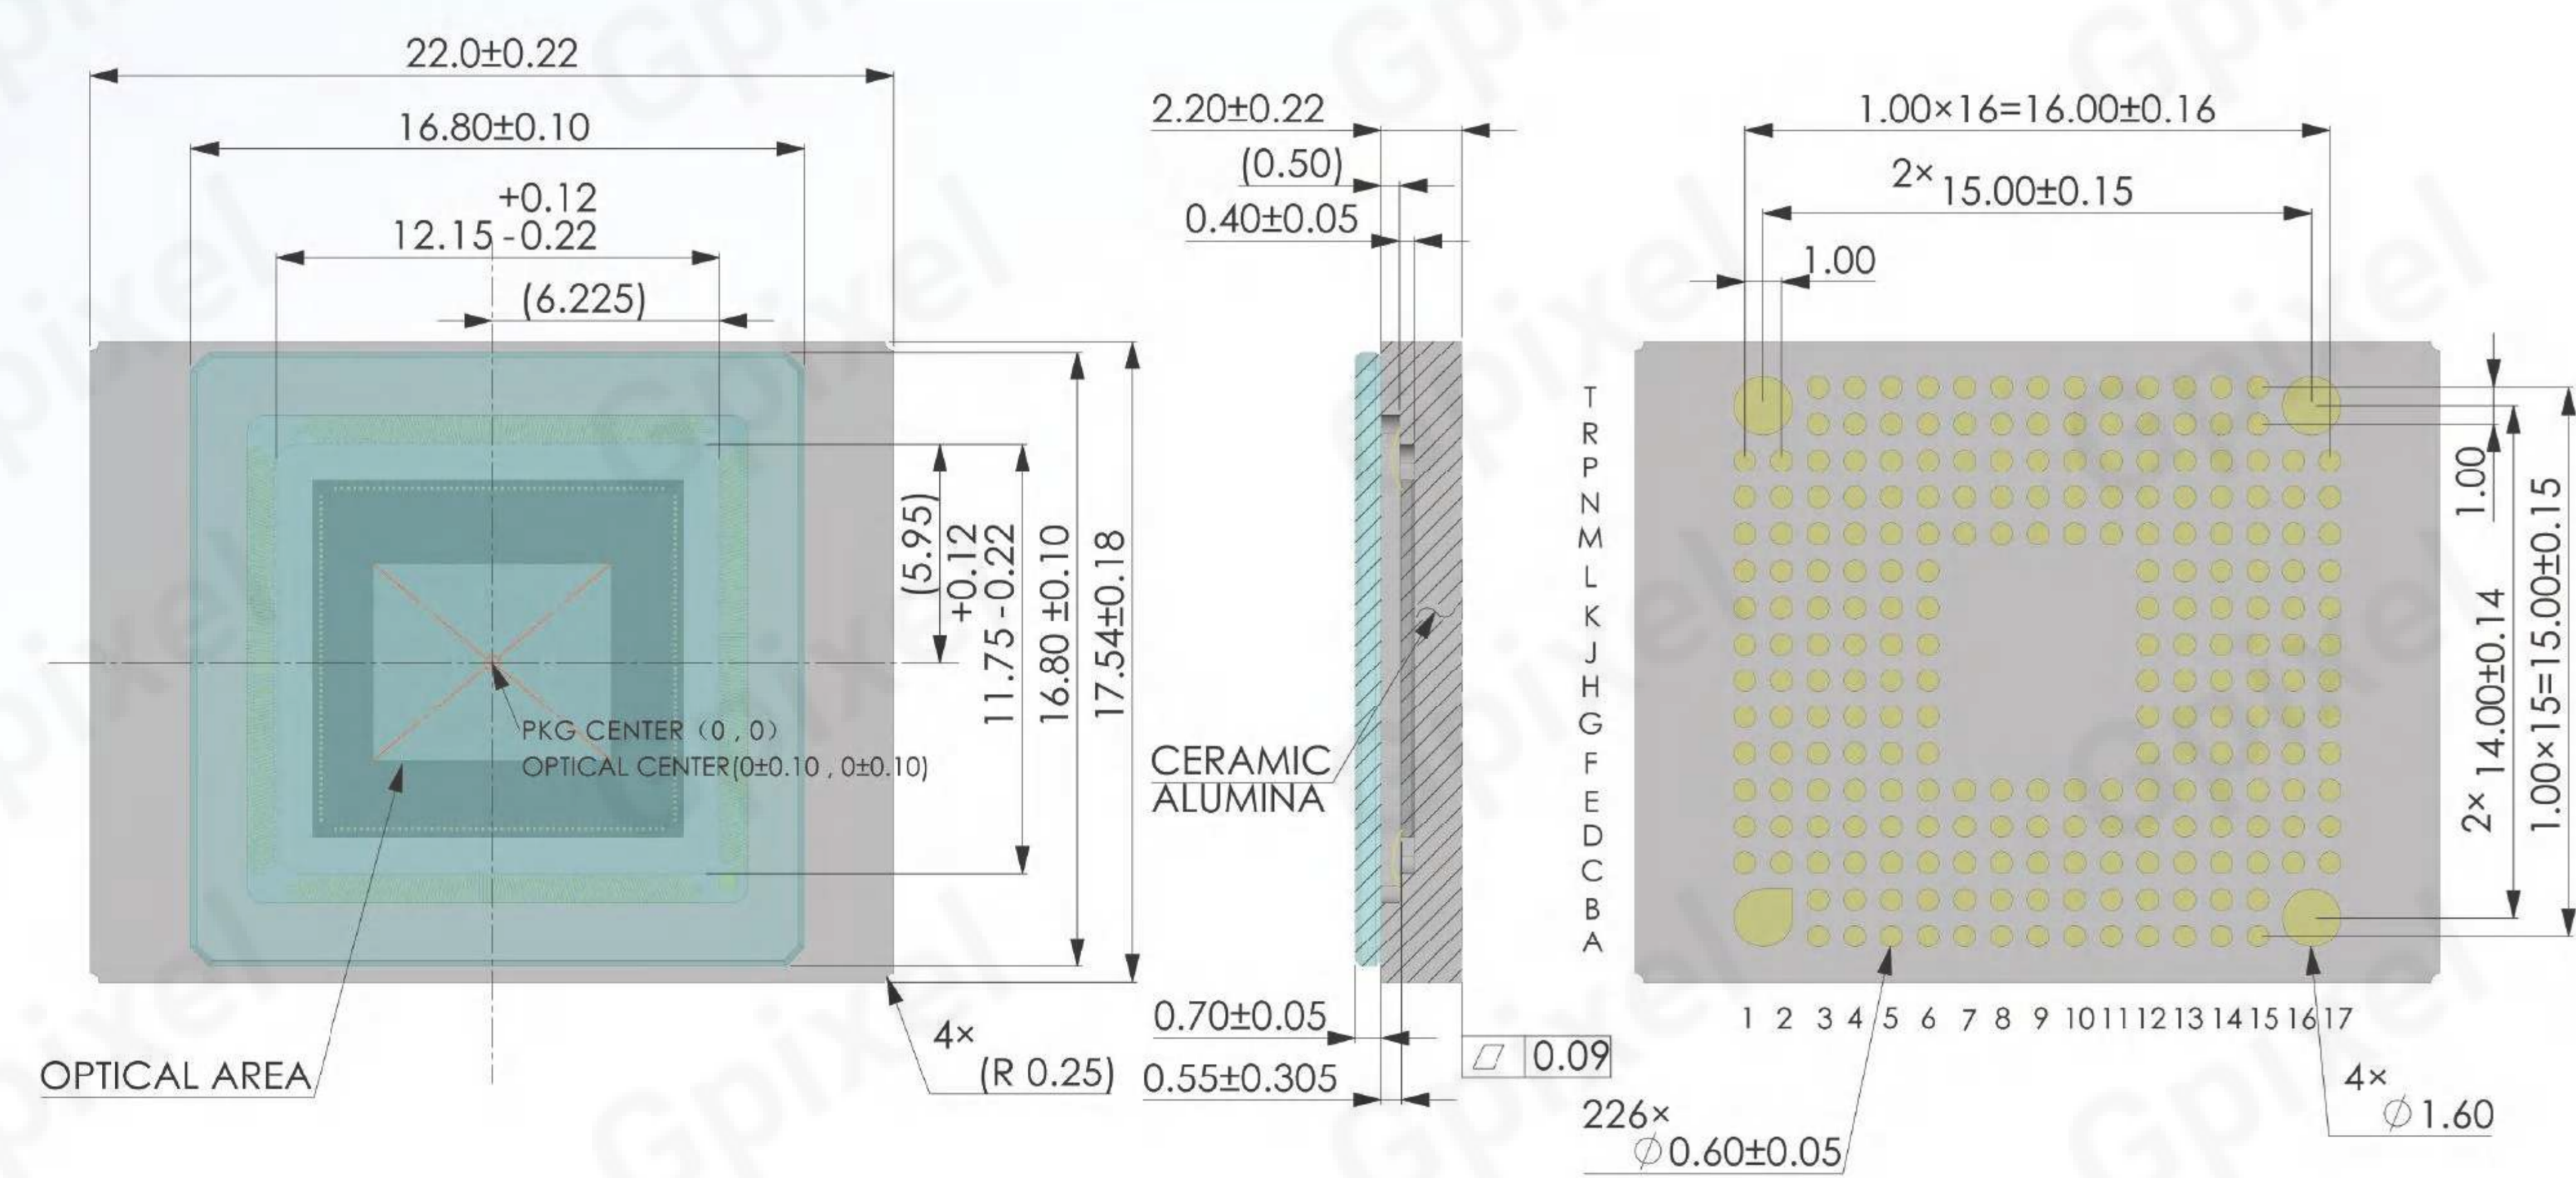

# GMAX2509

## 9MP GLOBAL SHUTTER CMOS IMAGE SENSOR



Featured with world smallest charge domain global shutter pixel, GMAX2509 is the new member of GMAX series C-mount line up after GMAX0505. It offers 4K (4200 x 2160) resolution in 2/3" optical format, operates with true CDS for low noise and high dynamic range. In addition, it has excellent PLS and angular response thanks to the light pipe technology.

GMAX2509 supports 10 bit and 12 bit output and is offered in two speed variances matching industrial standard camera interface speeds. The full speed version consists of 32 sub-LVDS data output channels and each runs at maximum 960 MHz, offering frame rate of 290 fps at 10 bit. The global shutter and high frame rate limits image blur for 4K video applications and intelligent traffic system and increases throughput for industrial inline inspections.

### Key Features and Benefits


- High Resolution GS in 2/3" Optical Format
- Low Noise Global Shutter
- Good PLS and CRA
- High Data Throughput > 26 Gbps
- 2.5 μm Global Shutter Pixel

### Application

- Automation & Inspection
- Logistic & Positioning
- Metrology
- Motion Capture

Specifications			
Nr of Active Pixels	4200(H) x 2160(V)	Optical Format	2/3"
Pixel Size	2.5 μm x 2.5 μm	Photosensitive Area	10.5 mm x 5.4 mm
Shutter Type	Global Shutter	Parasitic Light Sensitivity	65.5% (500 nm)
Full Well Capacity	6.7 ke <sup>-</sup> (PGA gain 1.0x)	Temporal Noise	<-80.0 dB
Temporal Noise	1.8 e <sup>-</sup> (12 bit,PGA gain 4x),3.9 e <sup>-</sup> (10 bit,PGA gain 2x)	Angular Response	>13° (80% Response)
Dark Current	1.2 e <sup>-</sup> /pixel/s (30°C)	Max. SNR	38.2 dB (PGA gain 1.0x)
Dynamic Range	65.5 dB (12 bit,PGA gain 2x),62.1 dB (10 bit,PGA gain 2x)	Max Frame Rate	290 fps (10 bit),121 fps (12 bit)
Output Format	32 ch Sub-LVDS	Channel Multiplexing	32/16/12/8/4/2
ADC	10/12 bit	Max. Data Rate	30.72 Gbps
Chroma	Mono & RGB Color	Power Consumption	<0.9 W (12 bit),<1.2 W (10 bit)
Supply Voltage	3.3 V/1.3 V (analog),1.8 V-3.3 V (IO),1.3 V (digital)	Package	226 pins LGA (20.3 mm x 17.5 mm)


### Package Drawing

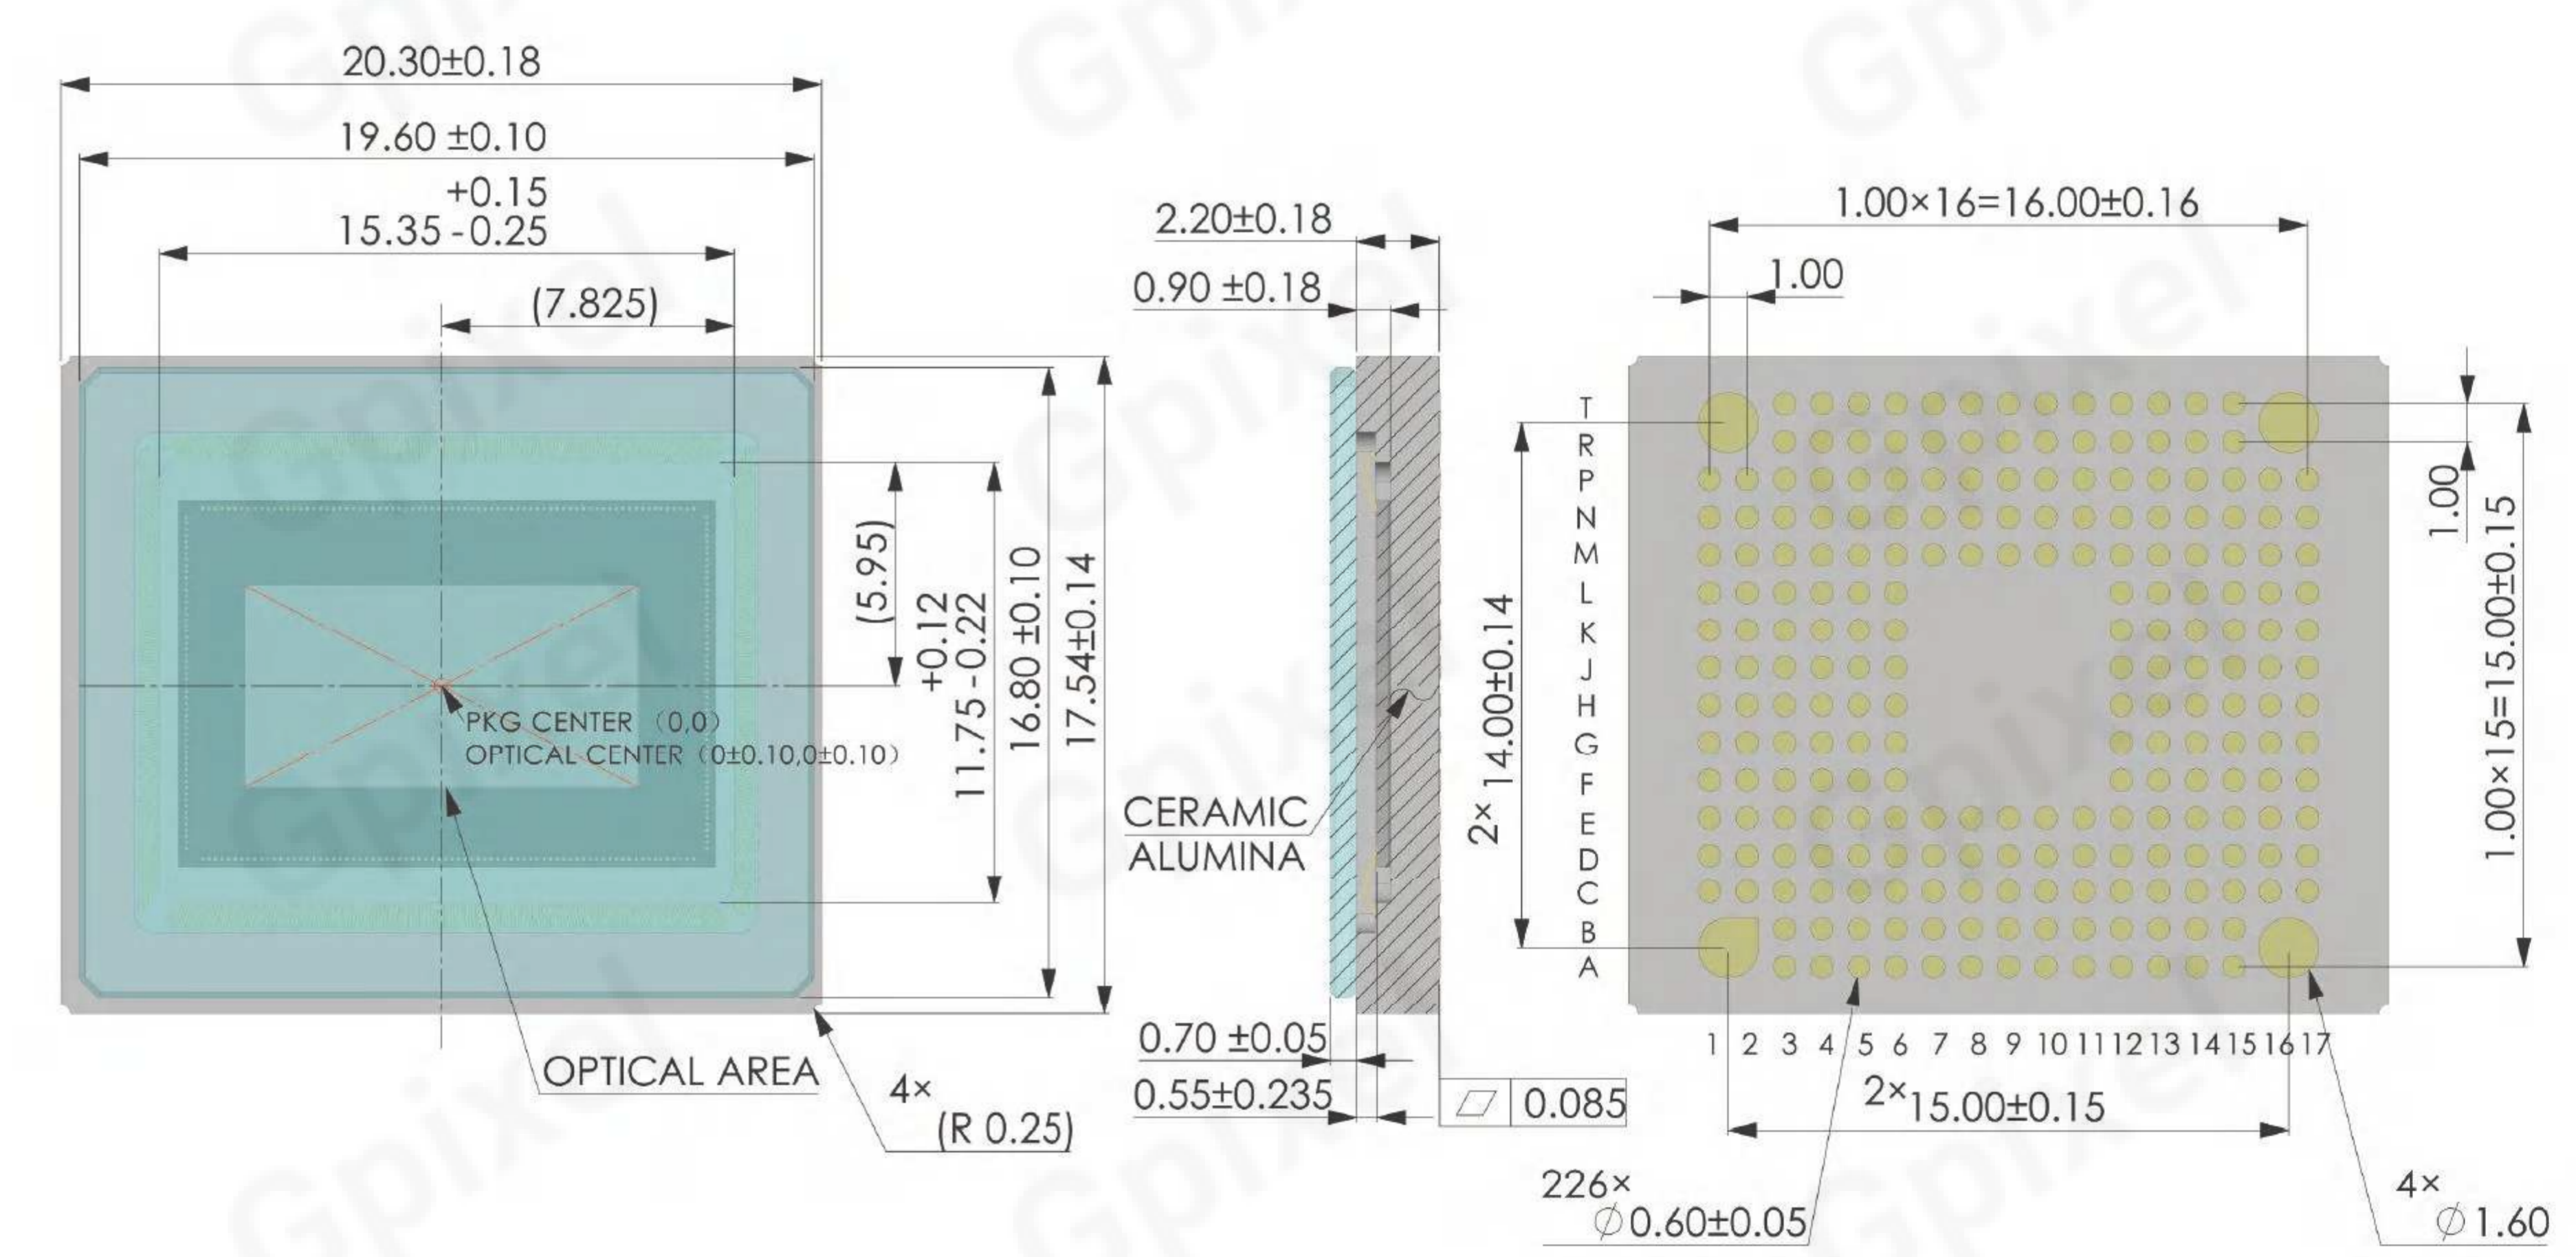



# GMAX4416

## 16MP GLOBAL SHUTTER CMOS IMAGE SENSOR

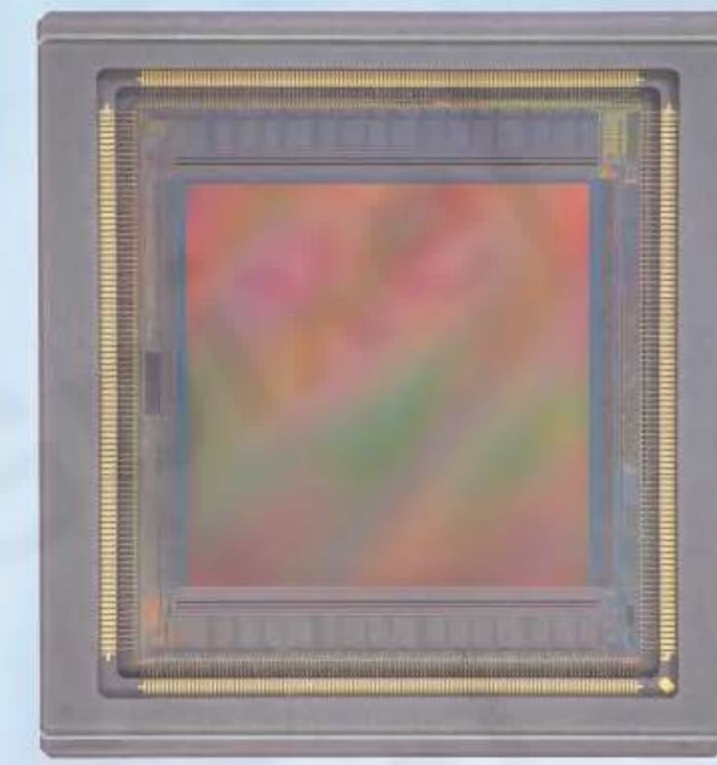

**GMAX4416** is a 1.6" (25.5 mm) optical format CMOS image sensor with 4096 x 4096 (16.7 MP) effective pixels. Using advanced processing technology, the 4.4 μm global shutter pixel achieves a max full well capacity of 14.5 ke<sup>-</sup> and min dark noise of 2.6 e<sup>-</sup>, delivering max 74.9 dB linear dynamic range and 41.8 dB SNR. On-chip analog binning increases the sensor full well capacity to 60.7 ke<sup>-</sup> and 47.8 dB SNR. Peak quantum efficiency is 71.1% (530 nm) and 30% (850 nm) due to its optimized NIR process. GMAX4416 can reach 80 fps frame rate in 12 bit standard high-speed mode with 32 pairs 600 Mbps sub-LVDS. It also supports 2 x 2 binning mode and a 2 x 2 binning HDR mode with frame rates of 42 fps and 80 fps respectively.

**GMAX4416** is housed in 152 pins ceramic μPGA package, 31.70 mm x 30.40 mm outer dimensions.

### Key Features and Benefits

- 4.4 μm Charge Domain Global Shutter Pixel
- 16 MP Resolution
- 1:1 Aspect Ratio
- Binning HDR Mode
- Near Infrared Enhancement
- Max Frame Rate: 80 fps


### Application

- Automation & Inspection
- Life Sciences
- Microscopy
- Motion Capture

### Specifications


Nr of Active Pixels	4096(H) x 4096(V)	Optical Format	1.6"
Pixel Size	4.4 μm x 4.4 μm	Photosensitive Area	18 mm x 18 mm
Shutter Type	Global Shutter	Peak QE	71.1% (530 nm)
Full Well Capacity	15 ke <sup>-</sup>	Parasitic Light Sensitivity	<-91 dB
Temporal Noise	<3.0 e <sup>-</sup>	Angular Response	>15° (80% Response)
Dark Current	< 5 e <sup>-</sup> /pixel/s (28°C)	Max. SNR	41.6 dB
Dynamic Range	68.1 dB (STD), 74.9 dB (HDR), 79.9 dB (Binning HDR)	Max Frame Rate	80 fps (STD), 42 fps (HDR), 80 fps (Binning HDR)
Output Format	32 pairs of Sub-LVDS	Channel Multiplexing	32/16/14/12/10/8/6/4/2/1
ADC	12 bit	Max. Data Rate	19.2 Gbps
Chroma	Mono, RGB Color	Power Consumption	<1.5 W
Supply Voltage	3.3 V (analog), 1.8 V – 3.3 V (IO), 1.2 V (digital)	Package	152 pins μPGA (31.70 mm x 34.00 mm)

### Package Drawing

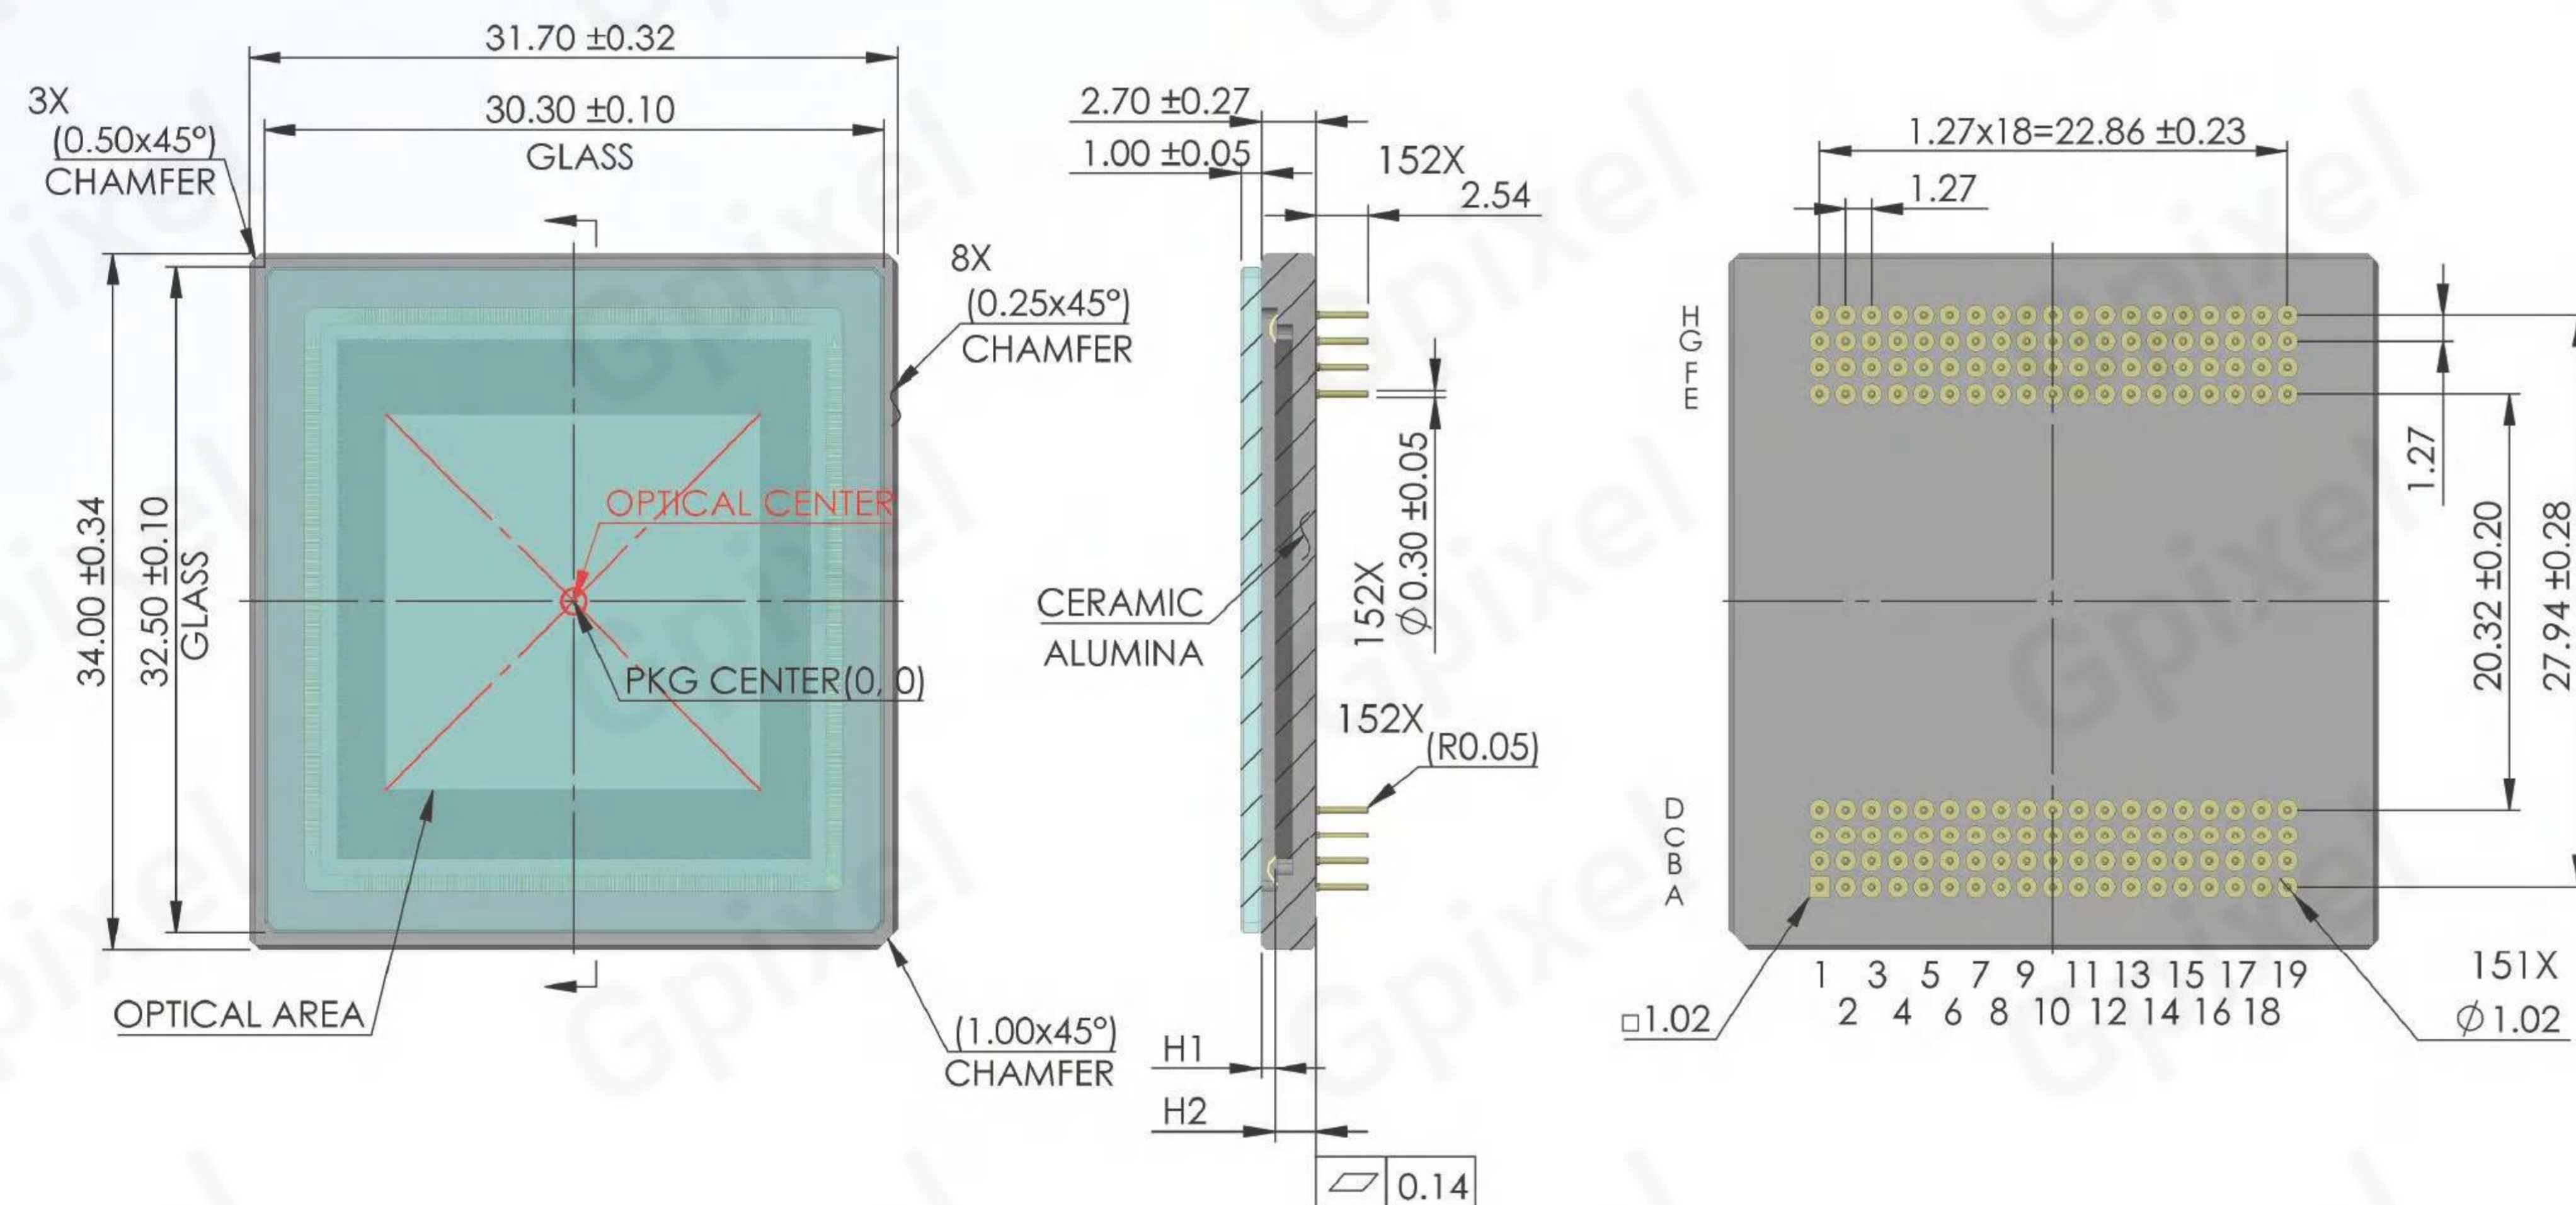

# GMAX2518

## 18MP GLOBAL SHUTTER CMOS IMAGE SENSOR

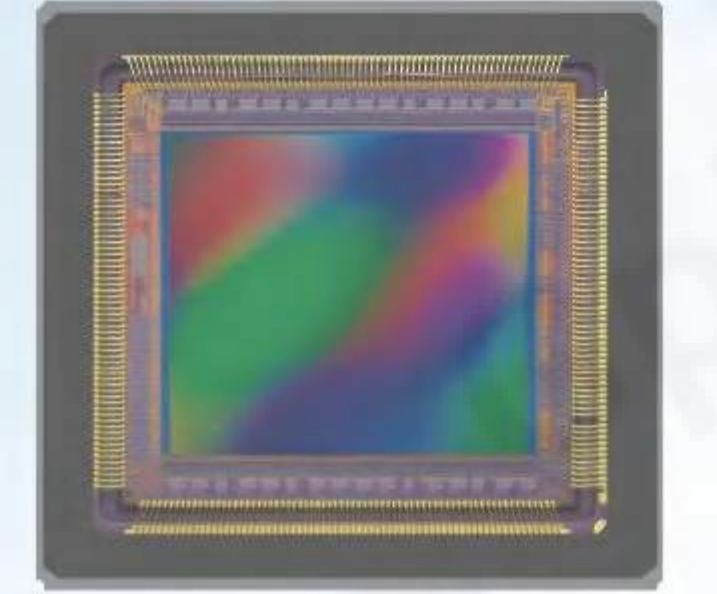

**GMAX2518** has an optical format of 1" and features 18 Mega Pixel (4508 x 4096) Global Shutter pixels based on the proven GMAX 2.5 μm architecture, operating with true correlated double sampling (CDS) for low read noise and high dynamic range. In addition, the dual light pipe technology provides excellent PLS and angular response, with 32 pairs of sub-LVDS each run at 960 MHz, the sensor output with maximum 30.72 Gbps data, achieving maximum frame rate of 150 fps in 10 bit output and 64 fps in 12 bit output. The sensor integrates an on-chip sequencer, programmable through SPI, and is designed to be fully pin compatible with GMAX0505, GMAX2509 and GMAX2505 to significantly shorten time to market for camera manufactures. GMAX2518 will be assembled in a 19.5 x 20.8 mm 226-pins LGA ceramic package, which is mechanically compatible to fit into an industry standard 29 mm x 29 mm camera housing.

### Key Features and Benefits

- 2.5 μm Global Shutter Pixel
- > 64% Peak QE, < -80 dB Shutter Efficiency
- High Speed and Good PLS
- High Data Throughput up to 30.72 Gbps
- Max Frame Rate: 139 fps
- Mechanically Compatible with Industry Standard Camera


### Application

- Automation & Inspection
- Logistic & Positioning
- Metrology

### Specifications


Nr of Active Pixels	4508(H) x 4096(V)	Optical Format	1"
Pixel Size	2.5 μm x 2.5 μm	Photosensitive Area	11.3 mm x 10.2 mm
Shutter Type	Global Shutter	Peak QE	64.0% (520 nm)
Full Well Capacity	8.0 ke <sup>-</sup> (PGA gain 1.0x)	Parasitic Light Sensitivity	<-80 dB
Temporal Noise	1.7 e <sup>-</sup> (12 bit, PGA gain 4x), 4.7 e <sup>-</sup> (10 bit, PGA gain 1.75x)	Angular Response	>12° (80% Response)
Dark Current	6.5 e <sup>-</sup> /pixel/s (45°C)	Max. SNR	39.0 dB (PGA gain 1.0x)
Dynamic Range	66.9 dB (12 bit, PGA gain 1.75x), 61.9 dB (10 bit, PGA gain 1.75x)	Max Frame Rate	139 fps (10 bit), 64 fps (12 bit)
Output Format	32 ch Sub-LVDS	Channel Multiplexing	32/16/12/8/4/2
ADC	10/12 bit	Max. Data Rate	30.72 Gbps
Chroma	Mono & RGB Color	Power Consumption	<1.2 W
Supply Voltage	3.3 V/1.3 V (analog), 1.8 V-3.3 V (IO), 1.3 V (digital)	Package	226 pins LGA (20.8 mm x 19.5 mm)

### Package Drawing

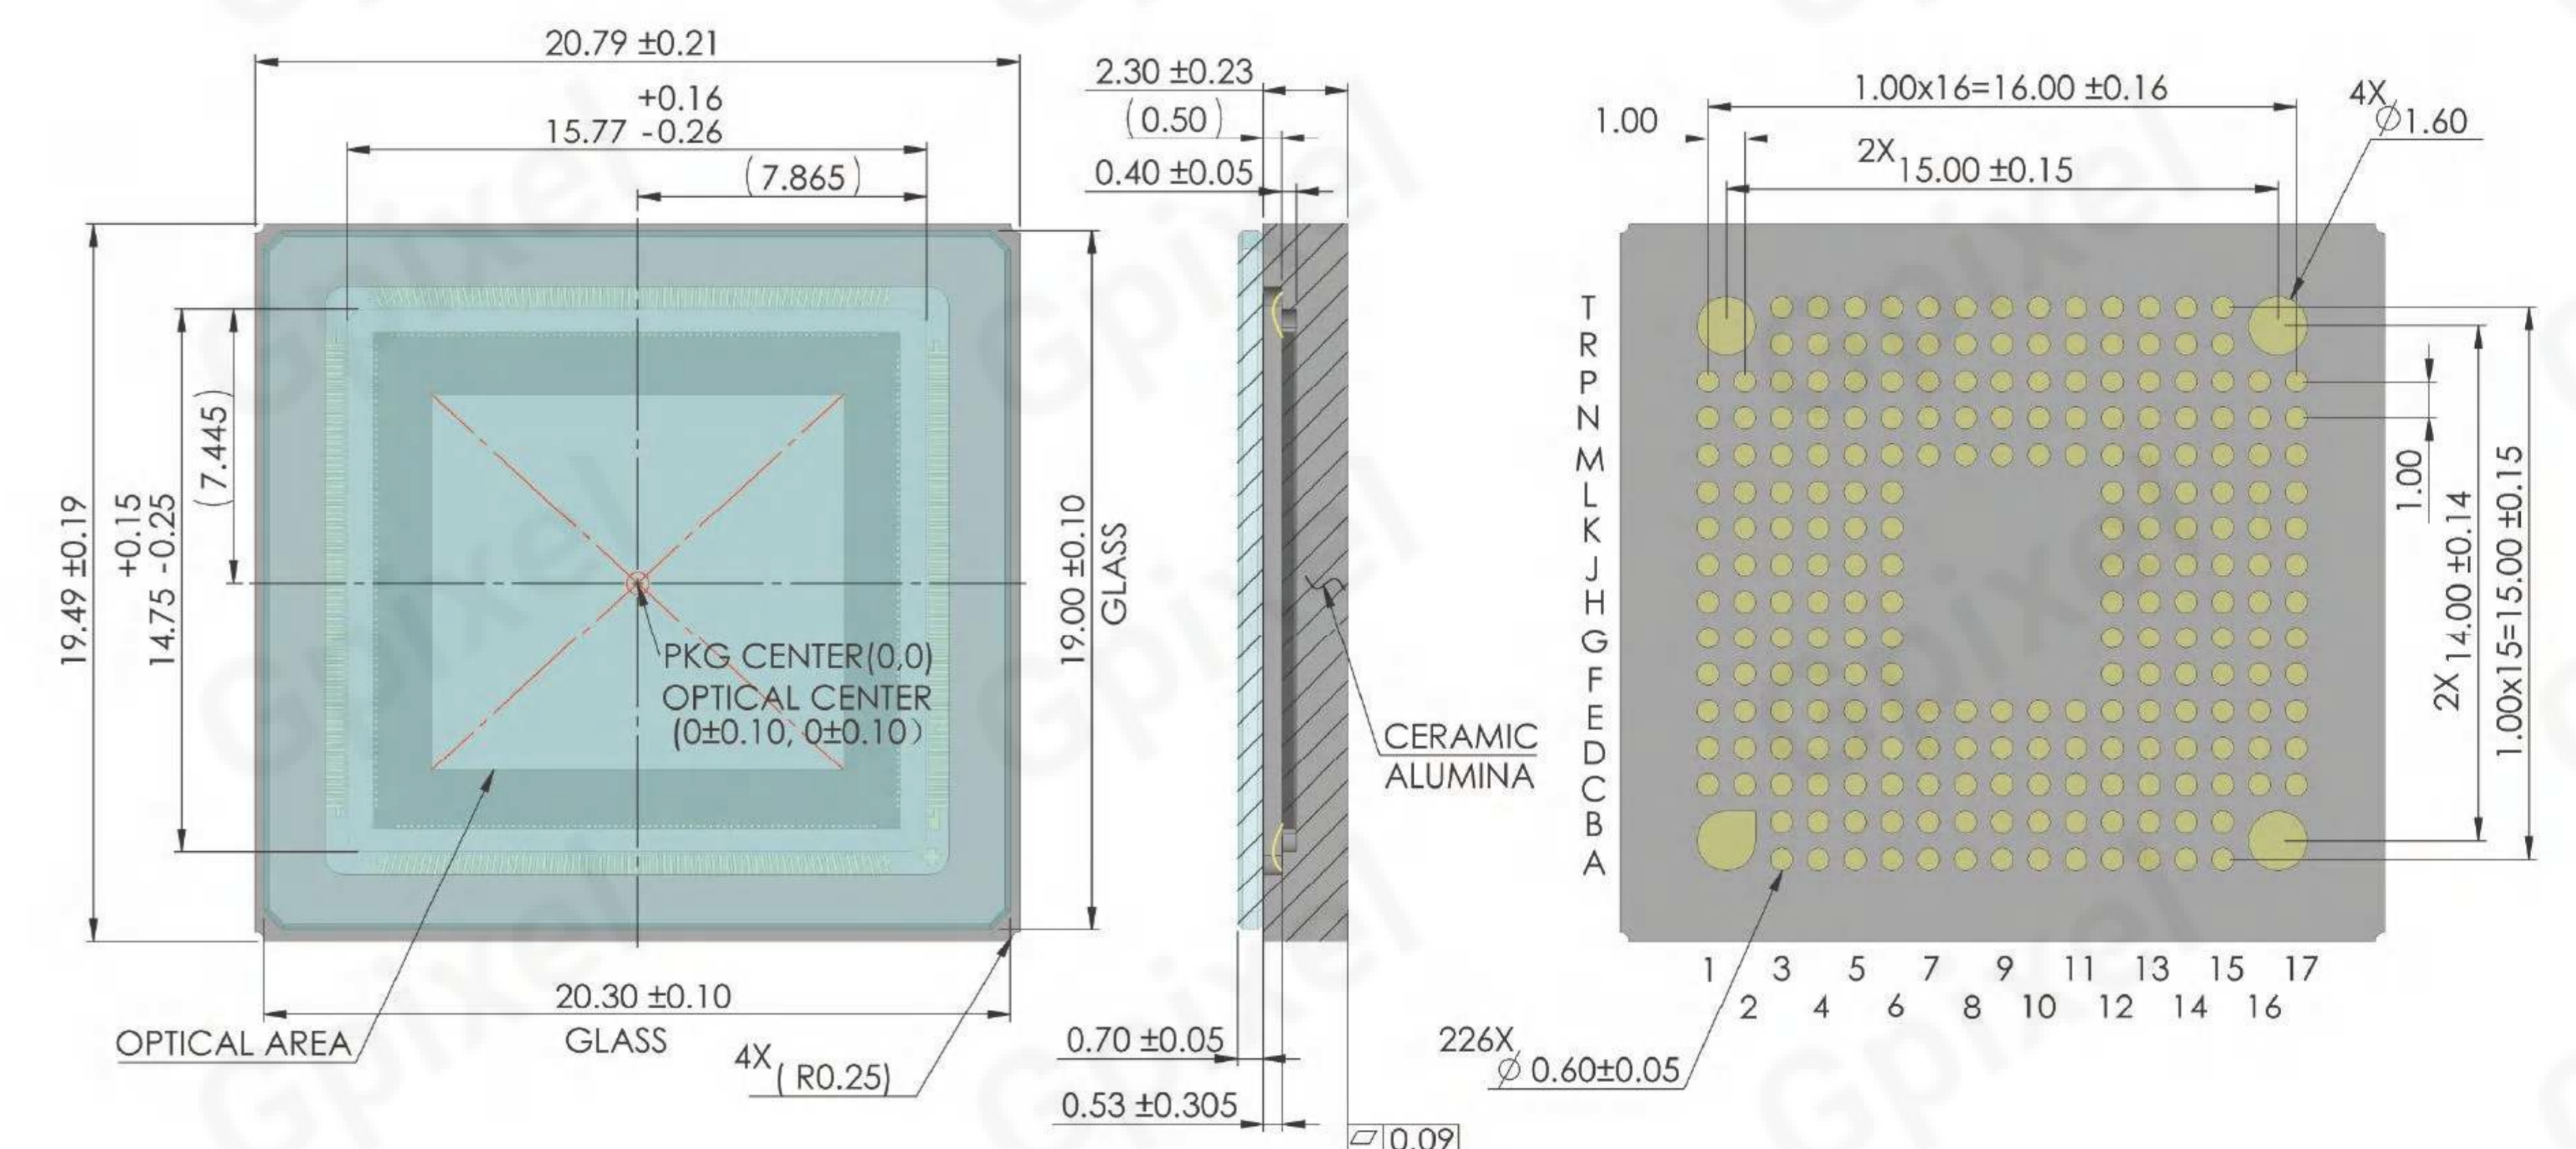

# GMAX2424BSI

## 24MP ROLLING SHUTTER IMAGE SENSOR

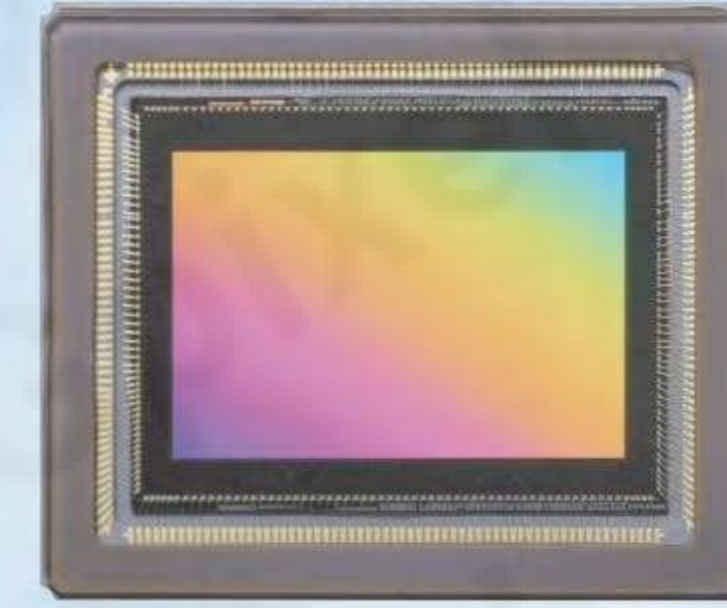

The GMAX2424BSI is a back-illuminated rolling shutter CMOS image sensor featuring a diagonal size of 17.47 mm and an effective resolution of 24.64 MP. It has a pixel size of 2.403 μm and offers high sensitivity, low noise, and high dynamic range. Combined with features such as global reset and low-power mode, the GMAX2424BSI presents an ideal choice for industrial inspection applications.

This sensor incorporates sub-LVDS and MIPI interfaces, supporting a high data rate of up to 1.2 Gbps per lane, and delivers a maximum frame rate of 60 fps in 10-bit sub-LVDS mode and 17 fps in 10-bit MIPI mode, providing an efficient and stable solution for high-speed industrial inspection and similar applications. The GMAX2424BSI is housed in a 176 pins ceramic LGA package. Its pinout is compatible with the GMAX3412 and GMAX3405 products, facilitating development efficiency.

### Key Features and Benefits


- 2.4 μm Rolling Shutter Pixel
- High Dynamic Range and Sensitivity
- Footprint-Compatible with GMAX3405 and GMAX3412
- MIPI & sLVDS Data Interface

### Application

- Automation & Inspection
- Metrology
- Life Sciences
- Logistics and Barcode Reading


Specifications			
Nr of Active Pixels	6016 (H) x 4096 (V)	Optical Format	1.1"
Pixel Size	2.4 μm x 2.4 μm	Photosensitive Area	14.4 mm x 9.8 mm
Shutter Type	Rolling Shutter	Peak QE	91.9% (510 nm)
Full Well Capacity	12.1 ke <sup>-</sup> (12 bit & 10 bit)	Angular Response	>20° (90% Response)
Temporal Noise	1.3 e <sup>-</sup> (12 bit, Analog gain 16.0x), 2.4 e <sup>-</sup> (10 bit, Analog gain 8.0x)	Max. SNR	40.8 dB
Dynamic Range	73 dB (12 bit, Analog gain 1.0x), 67 dB (10 bit, Analog gain 1.0x)	Max Frame Rate	60 fps (STD, Sub-LVDS, 10 bit) 30 fps (STD, Sub-LVDS, 12 bit) 17 fps (STD, MIPI, 10 bit)
Output Format	14 pairs of Sub-LVDS, 4 lanes of MIPI	Channel Multiplexing	14/12/10/8/6/4 (Sub-LVDS), 4/2 (MIPI)
ADC	10/12 bit	Max. Data Rate	16.8 Gbps
Chroma	Bayer RGB or Mono	Power Consumption	< 0.63 W
Supply Voltage	2.9 V and 3.3 V (pixel), 2.9 V (analog), 1.8 V – 3.3 V (IO), 1.2 V (digital)	Package	176 pins LGA, (22.93 mm x 19.39 mm)

### Package Drawing

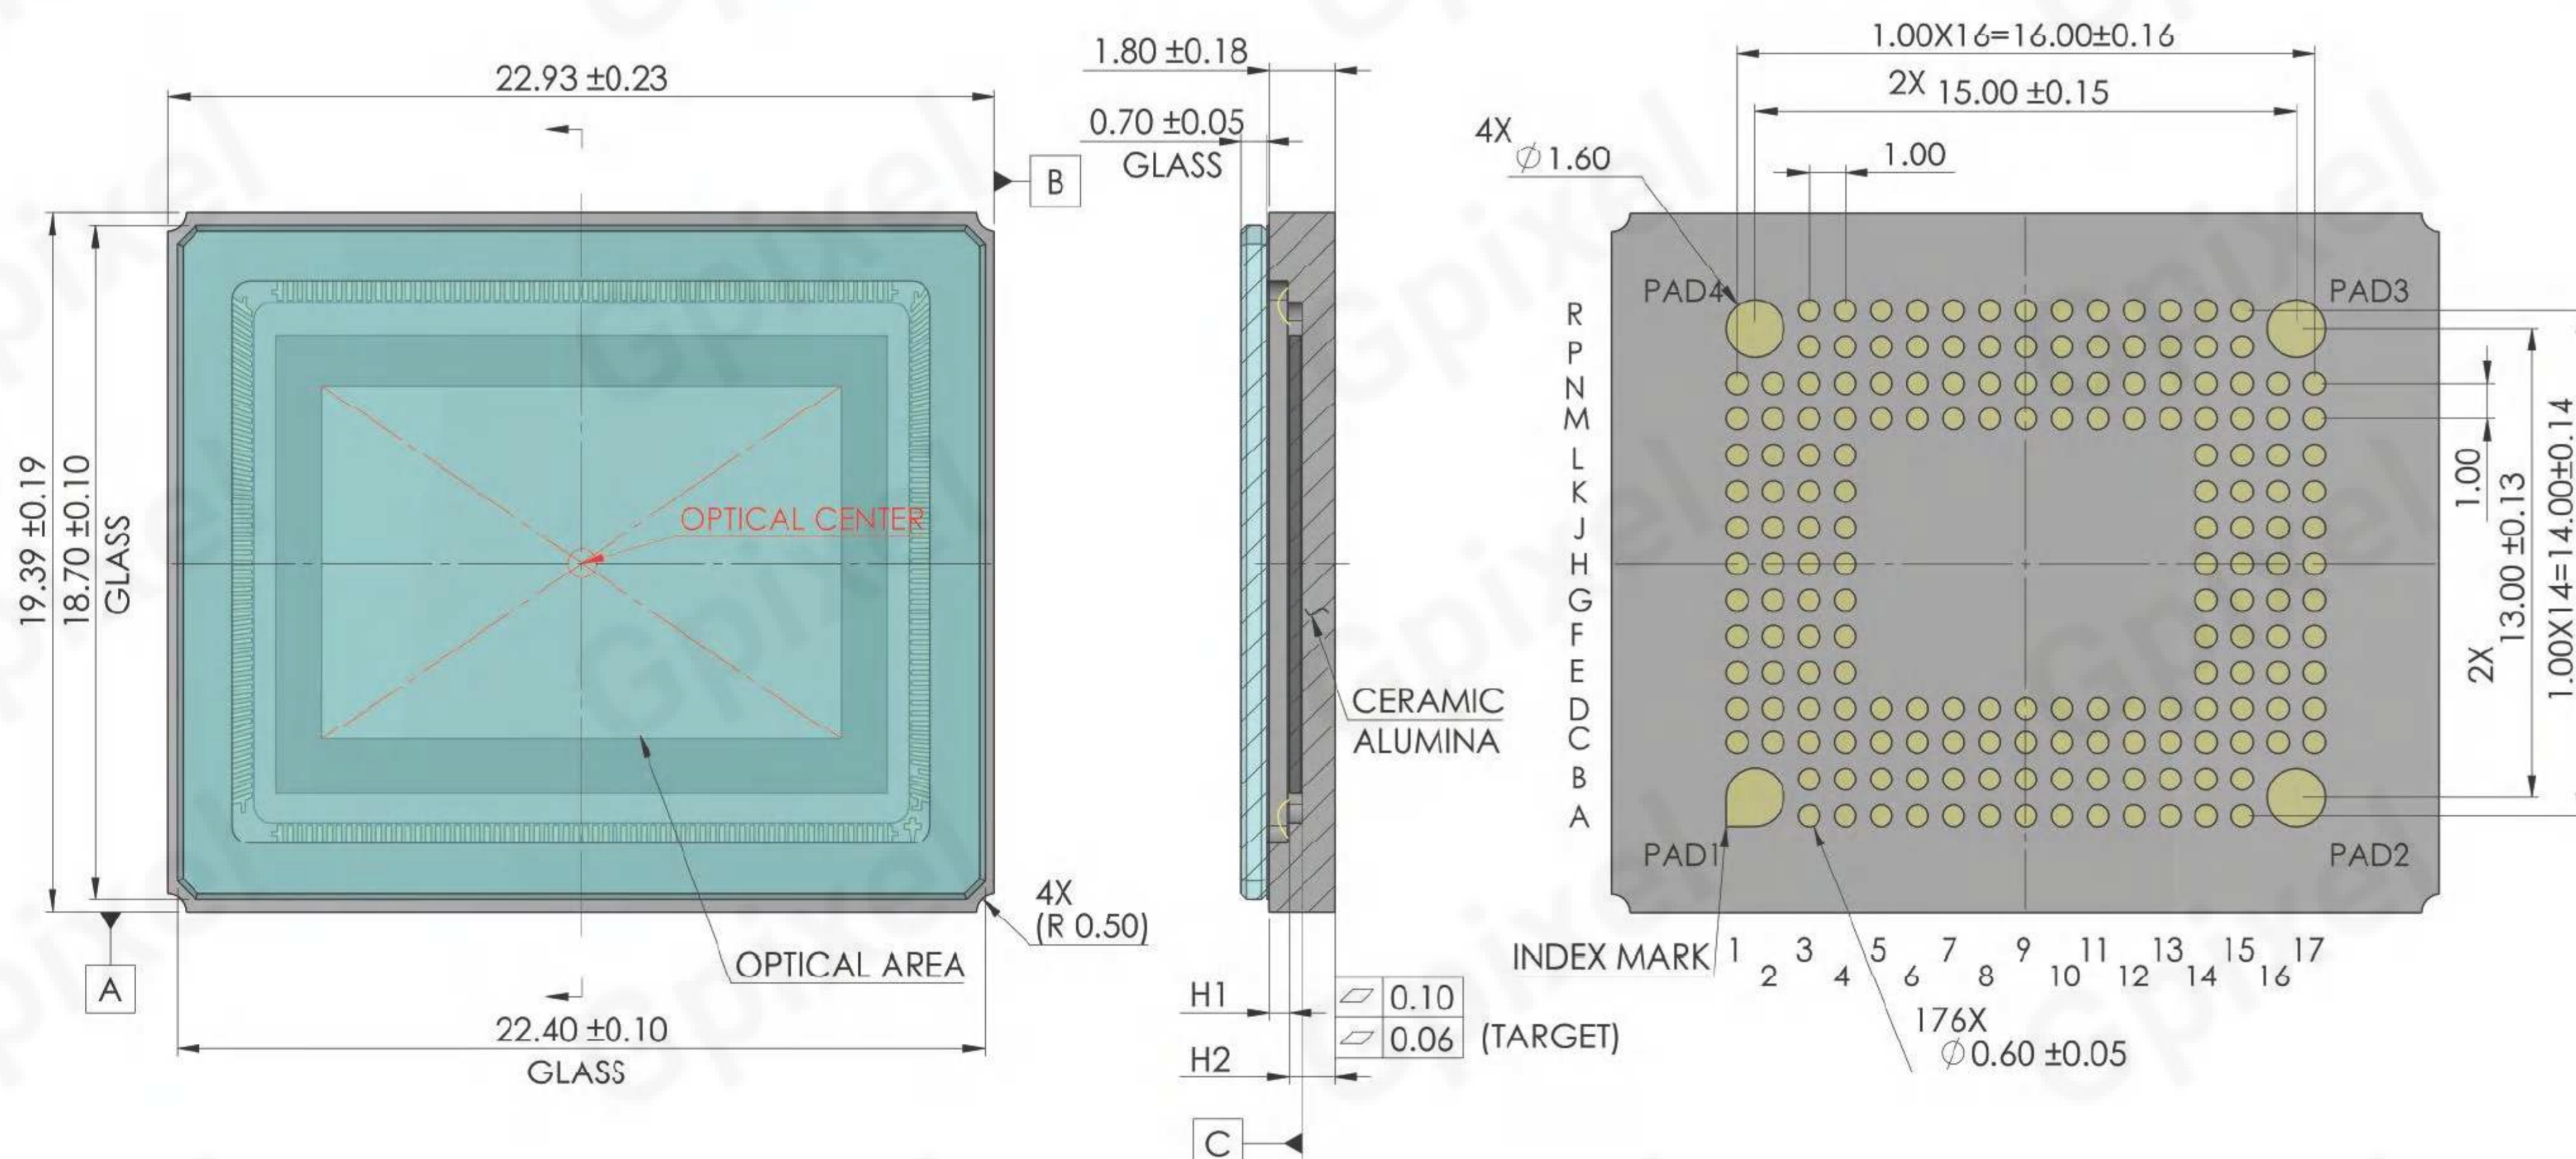

# GMAX0505

## 26MP GLOBAL SHUTTER CMOS IMAGE SENSOR

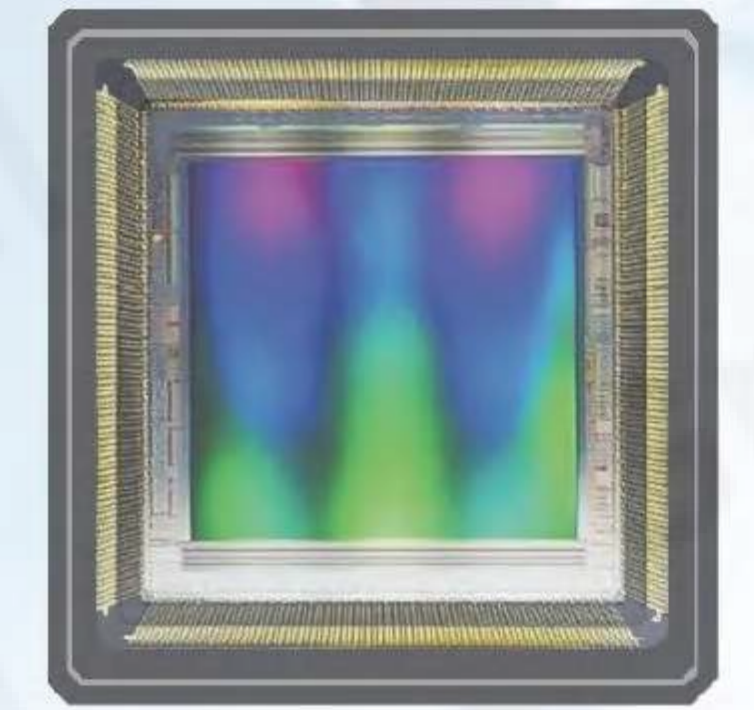

Designed with small 2.5 μm charge domain global shutter pixel, GMAX0505 offers the high resolution of 25 Megapixels within 1.1" optical format. Despite its small pixel pitch, GMAX0505 achieves more than 65% peak QE and excellent angular response thanks to the latest light pipe technology. In addition, with optimized tungsten shielding structure on top of the pixel's memory node, the sensor's shutter efficiency is more than 80 dB. GMAX0505 supports 10 bit and 12 bit output, and the frame rate is up to 150 fps. The sensor is assembled in a ceramic Land Grid Array (LGA) package, allowing easy integration and mass production. The superior performance and the cost-effective packaging of GMAX0505 offer camera manufactures great advantage over various applications.

### Key Features and Benefits


- 2.5 μm Global Shutter Pixel
- High Resolution GS in 1.1" Optical Format
- Optimized Tungsten Shielding Structure
- NIR Enhanced – Red Fox
- High Speed and Good PLS
- Pin-Compatible with GMAX2505, GMAX2509 and GMAX2518

### Application

- Automation & Inspection
- Logistic & Positioning
- Metrology


Specifications			
Nr of Active Pixels	5120(H) x 5120(V)	Optical Format	1.1"
Pixel Size	2.5 μm x 2.5 μm	Photosensitive Area	12.8 mm x 12.8 mm
Shutter Type	Global Shutter	Peak QE	65.5% (500 nm)
Full Well Capacity	6.5 ke <sup>-</sup> (PGA gain 1.0x)	Parasitic Light Sensitivity	< -80 dB
Temporal Noise	1.6 e <sup>-</sup> (12 bit, PGA gain 5x), 3.4 e <sup>-</sup> (10 bit, PGA gain 2.5x)	Angular Response	>13° (80% Response)
Dark Current	1.0 e <sup>-</sup> /pixel/s (30°C)	Max. SNR	38.1 dB (PGA gain 1.0x)
Dynamic Range	65.8 dB (12 bit, PGA gain 2.5x), 61.4 dB (10 bit PGA gain 2.5x)	Max Frame Rate	150 fps (10 bit), 42 fps (12 bit)
Output Format	48 ch Sub-LVDS	Channel Multiplexing	48/24/16/12/8/6/4/2
ADC	10/12 bit	Max. Data Rate	46.08 Gbps
Chroma	Mono, Mono (NIR enhanced), RGB Color	Power Consumption	<1.1 W (12 bit), <1.5 W (10 bit)
Supply Voltage	3.3 V/1.3 V (analog), 1.8 V-3.3 V (IO), 1.3 V (digital)	Package	226 pins LGA (22.3 mm x 23.4 mm)

### Package Drawing

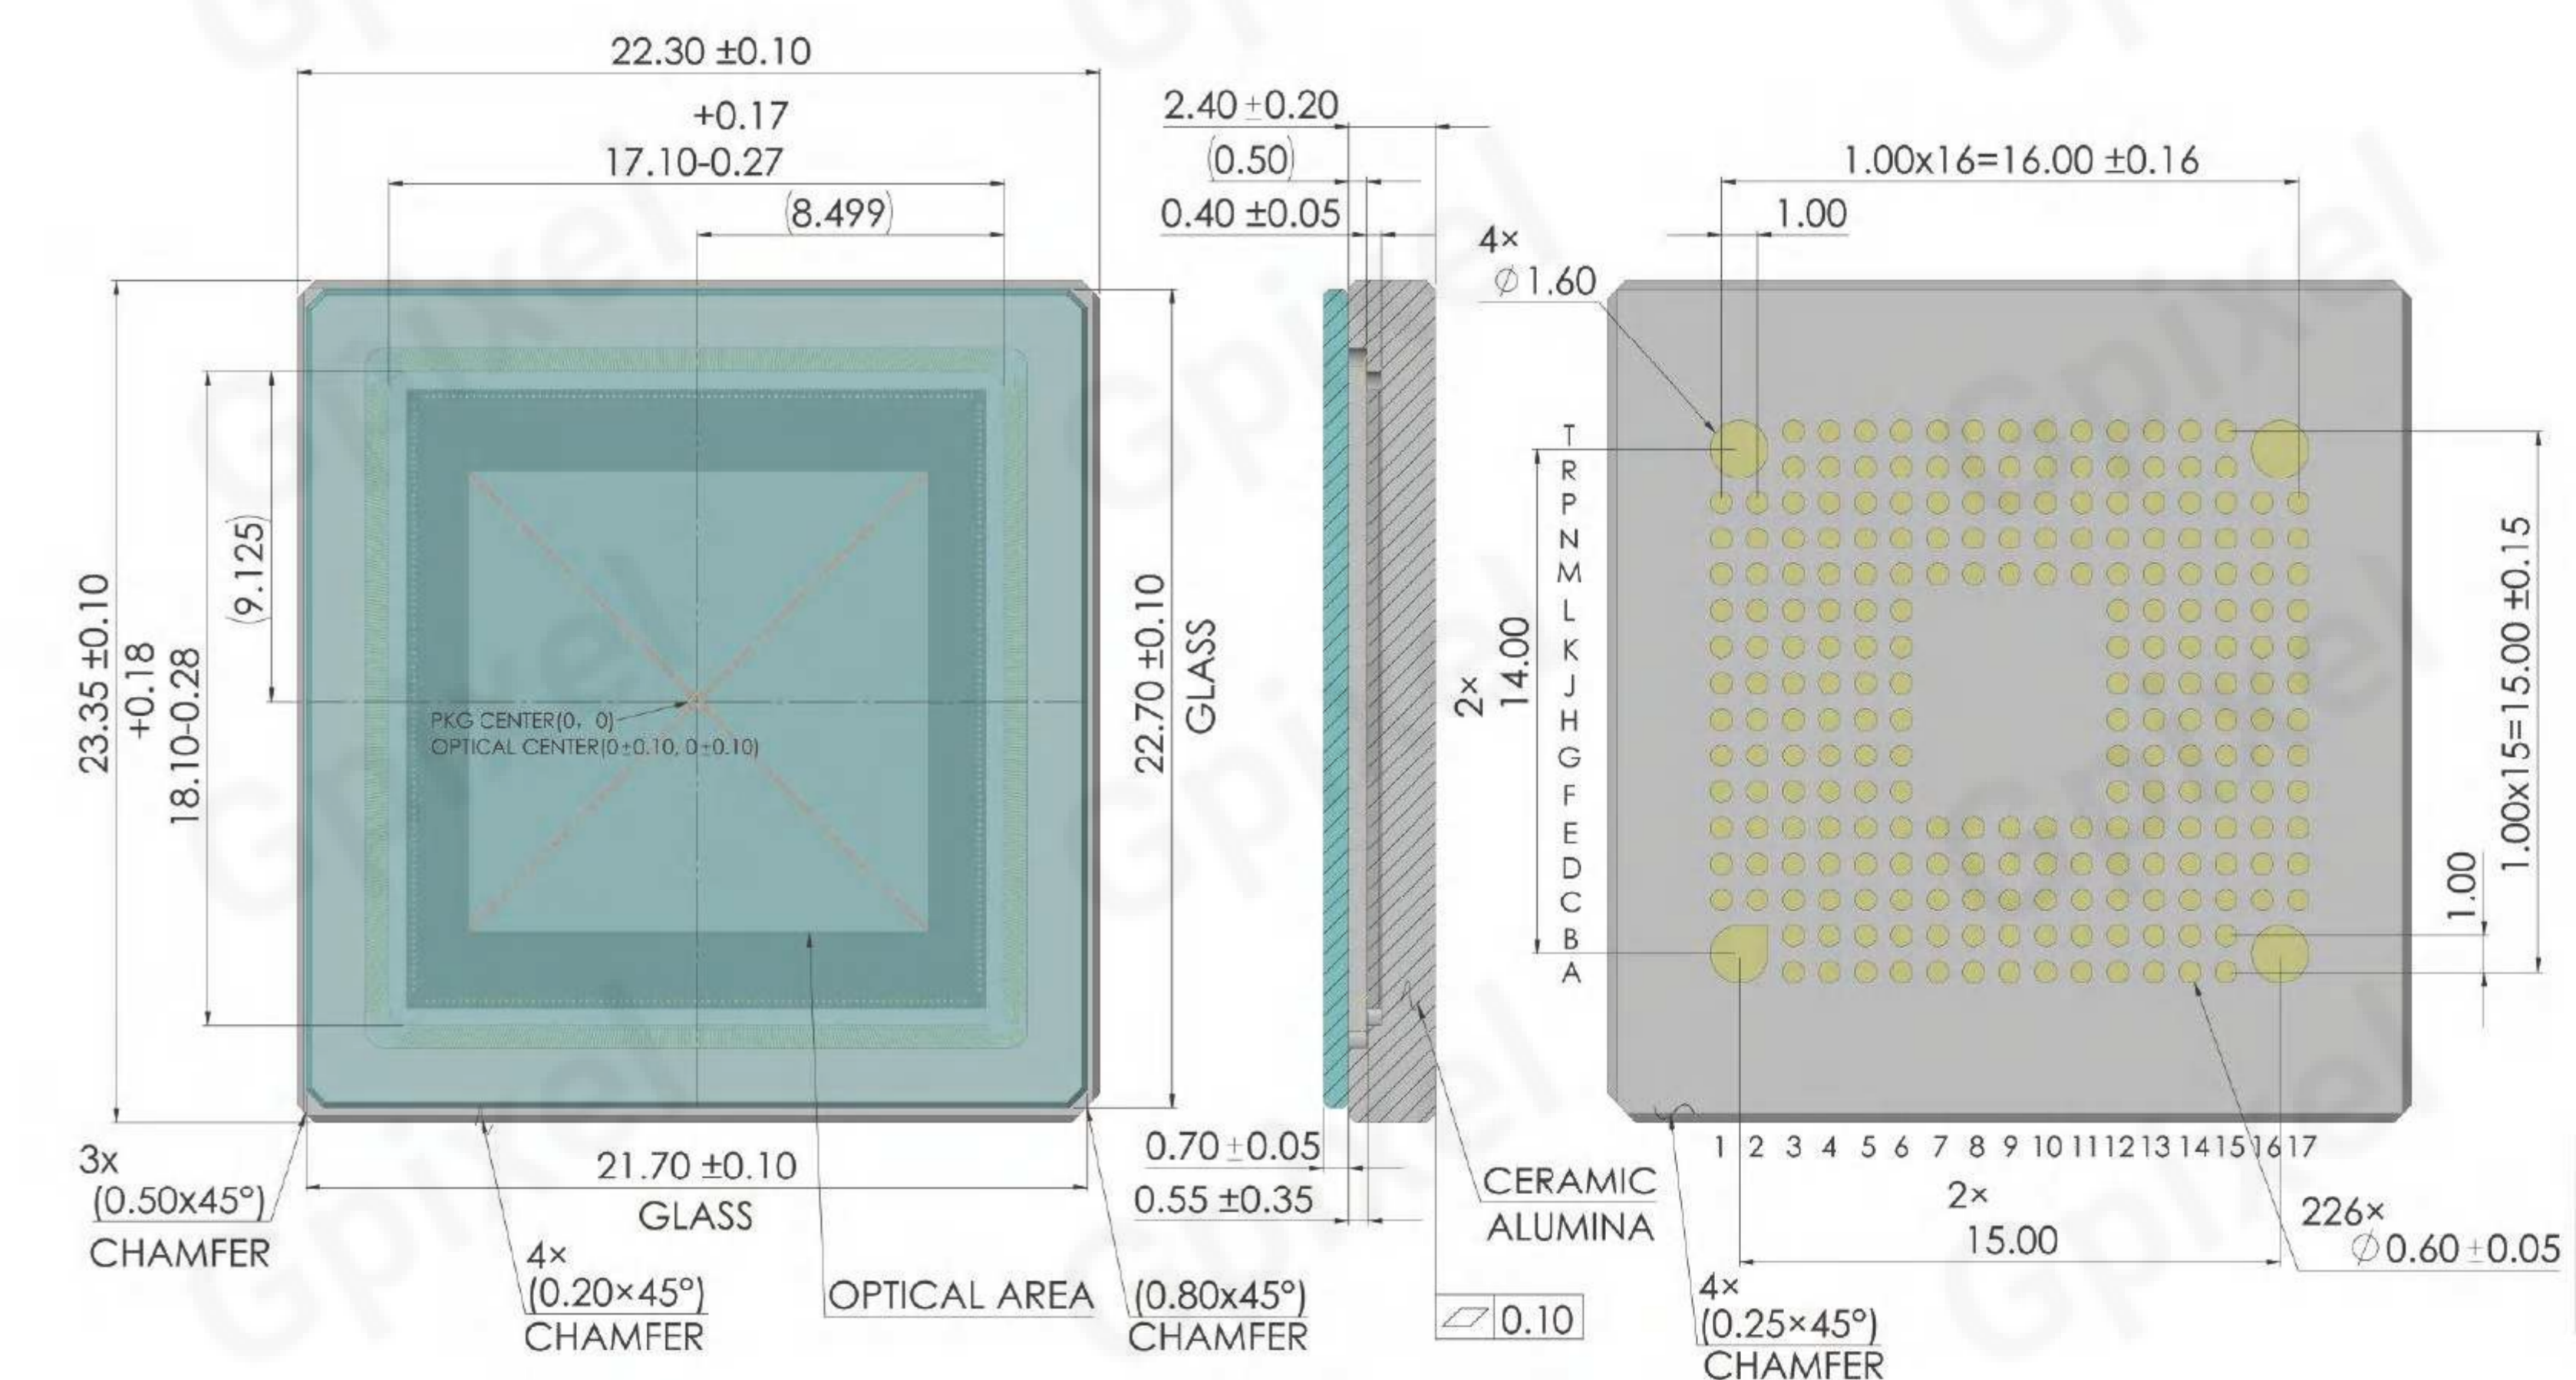

# GMAX4651

## 51MP GLOBAL SHUTTER CMOS IMAGE SENSOR

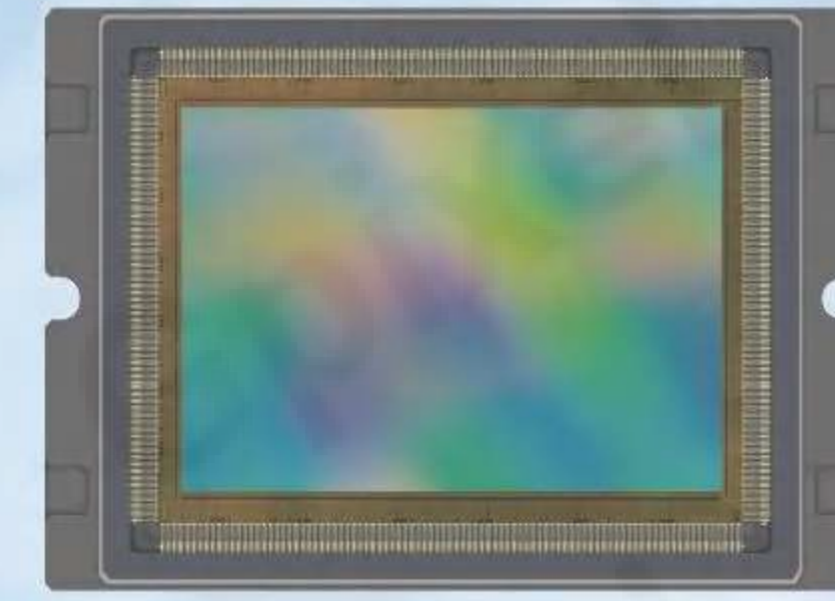

**GMAX4651** is a 51 Megapixel (8424 x 6032) full frame (35 mm) global shutter image sensor designed using the latest 4.6  $\mu\text{m}$  charge domain global shutter pixel. Using the advanced 65 nm CIS process, it provides  $18 \text{ ke}^- \text{ FWC}$ ,  $7.6 \text{ e}^-$  median dark noise and more than 65.5 dB intra-scene dynamic range. With the light pipe technology, sensor achieves > 67% QE (510 nm) and 1/40,000 shutter efficiency.

**GMAX4651** delivers 30 fps in single gain operation mode running at 864 Mbps. GMAX4651 is assembled with 238 pins PGA ceramic package and the optical center is fully aligned with the package mechanical center. The unique features make it an ideal solution for demanding imaging applications like machine vision, 8K broadcasting and high-end industrial inspections.

### Key Features and Benefits


- 4.6  $\mu\text{m}$  Global Shutter Pixel
- 35 mm Full Frame of Optical Format
- High Data Throughput up to 21 Gbps
- High Speed and Good PLS
- Optical Center = Package Mechanical Center

### Application

- Automation & Inspection


Specifications			
Nr of Active Pixels	8424(H) x 6032(V)	Optical Format	35 mm Full Frame
Pixel Size	4.6 $\mu\text{m}$ x 4.6 $\mu\text{m}$	Photosensitive Area	38.8 mm x 27.8 mm
Shutter Type	Global shutter	Peak QE	67.1% (510 nm)
Full Well Capacity	18 $\text{ke}^-$ (PGA gain 3.5x)	Parasitic Light Sensitivity	<-92 dB
Temporal Noise	7.6 $\text{e}^-$ (PGA gain 5x)	Angular Response	>15° (80% Response)
Dark Current	6 $\text{e}^-$ /pixel/s (45°C)	Max. SNR	42.5 dB (PGA gain 3.5x)
Dynamic Range	65.5 dB (PGA gain 3.5x)	Max Frame Rate	30 fps
Output Format	24 ch Sub-LVDS	Channel Multiplexing	24/14/8/6/4
ADC	12 bit	Max. Data Rate	20.74 Gbps
Chroma	Mono, RGB Color	Power Consumption	<2.8 W
Supply Voltage	3.3 V/1.3 V (analog), 1.8 V - 3.3 V (IO), 1.3 V (digital)	Package	238 pins PGA (58.6 mm x 42.0 mm)

### Package Drawing

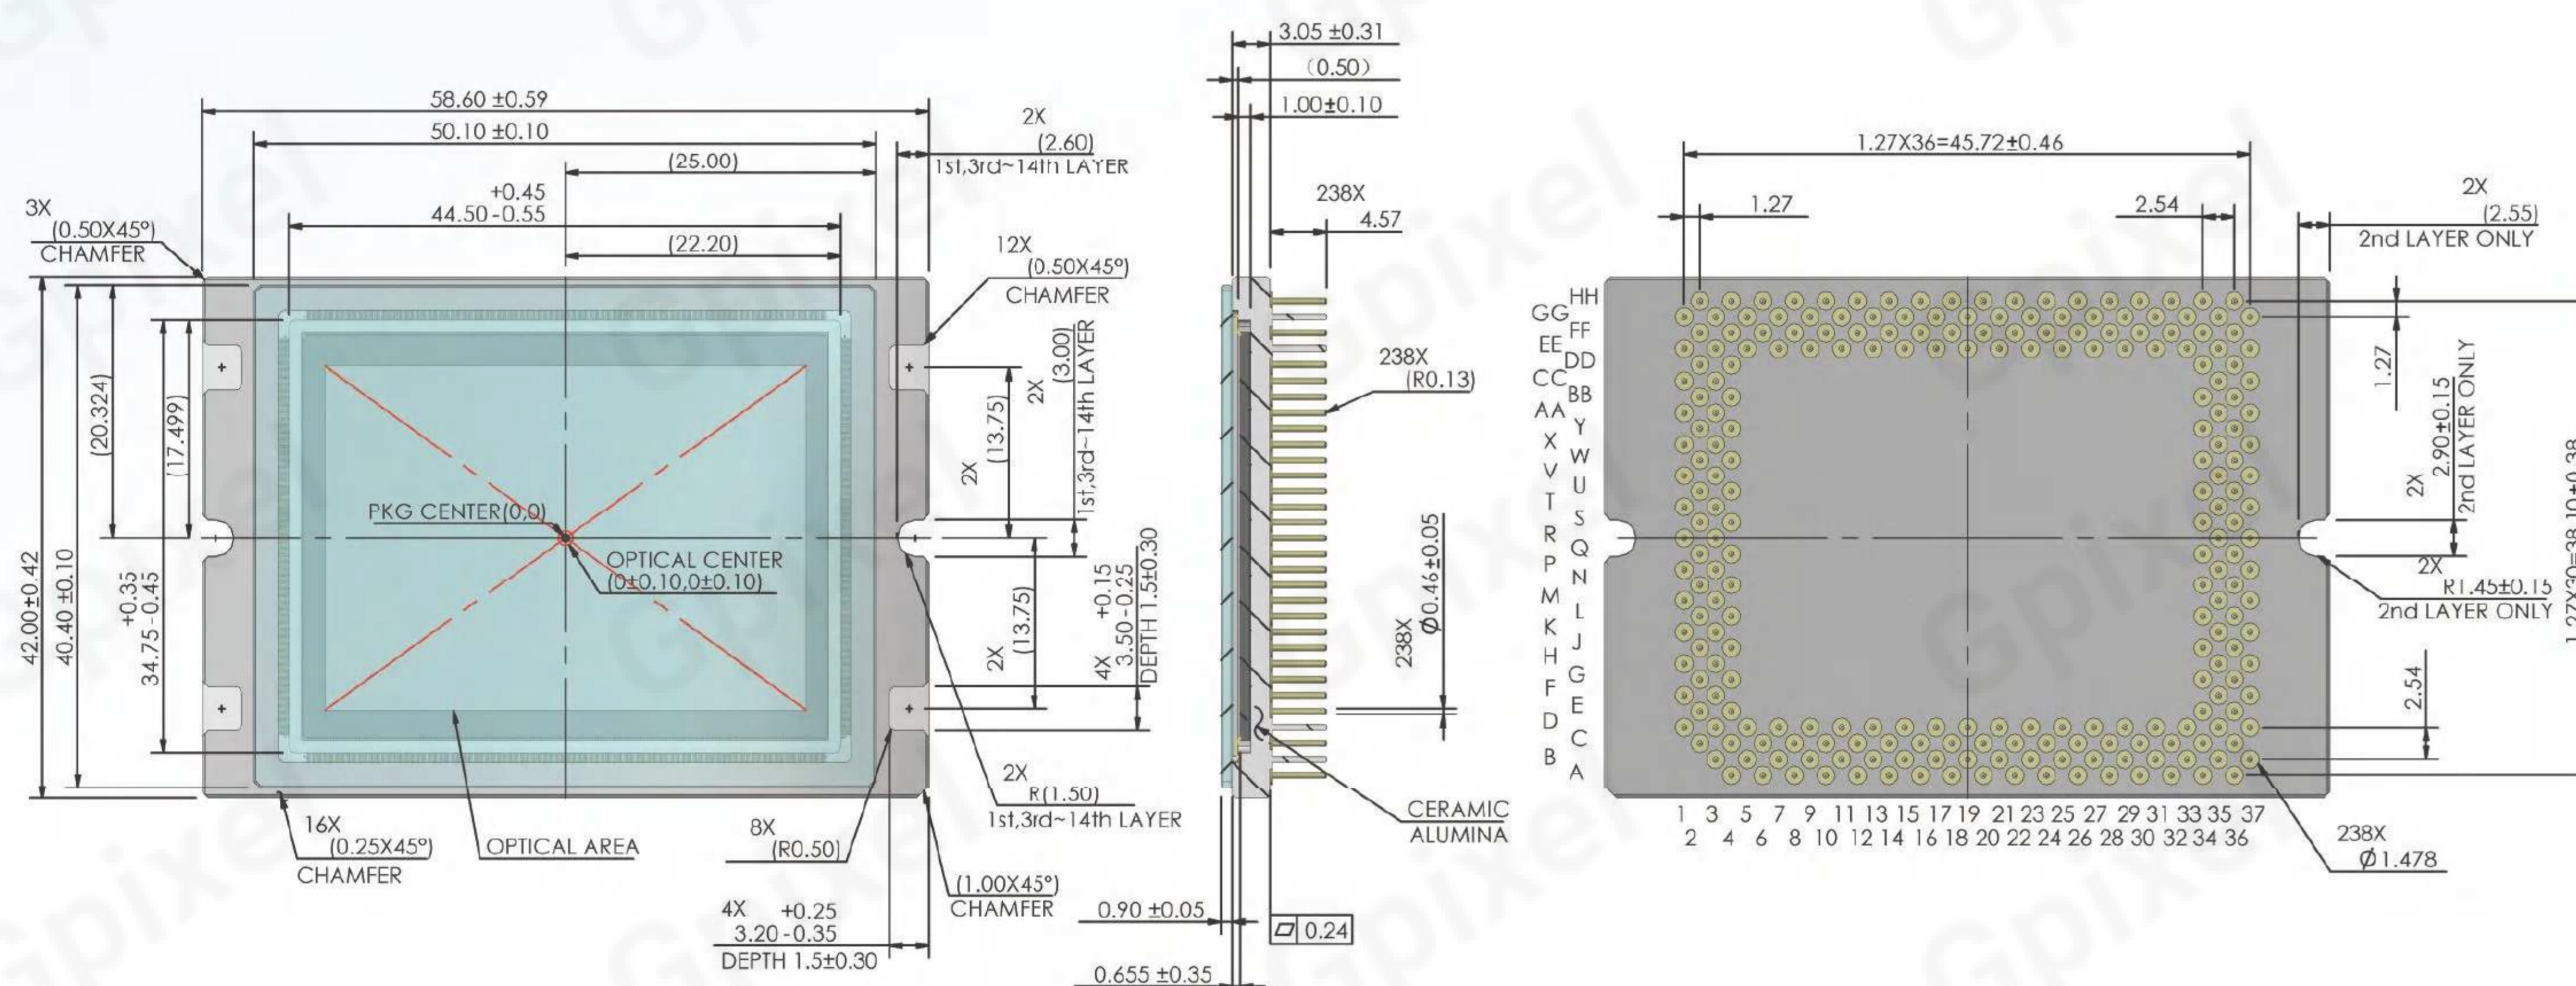

# GMAX3265

## 65MP GLOBAL SHUTTER CMOS IMAGE SENSOR

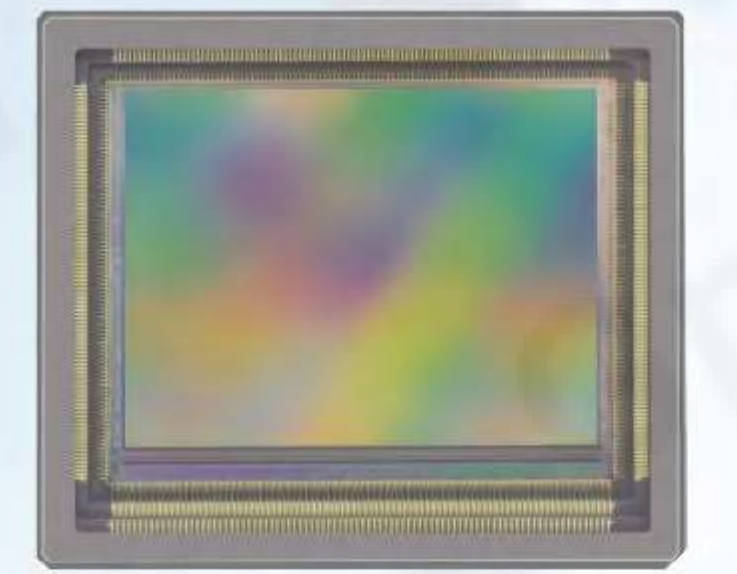

Featured with the latest generation 3.2  $\mu\text{m}$  charge-domain global shutter pixel and 65 MP (9344 x 7000) resolution, GMAX3265 is the leading-edge image sensor with 37.4 mm diagonal for high resolution machine vision and industrial inspection applications. This new generation pixel operates with true correlated double sampling (CDS), allowing low read noise and high dynamic range. In addition, the dual light pipe technology provides excellent PLS and angular response.

**GMAX3265** is offered in high speed version and normal speed version. High speed version delivers 71 fps at 10 bit output, normal speed version delivers 31 fps at 12 bit output. The superior resolution and frame rate significantly increases the system throughput for industrial inspection applications, such as semiconductor, PCB, AOI or display inspection. The sensor integrates an on-chip sequencer, programmable through SPI, shortening time-to-market for camera manufactures. GMAX3265 is assembled with 239-pins micro-PGA ceramic package for reliability and good heat dissipation and a double-sided ARC D263 glass lid.

### Key Features and Benefits


- 3.2  $\mu\text{m}$  Global Shutter Pixel
- Image Diagonal: 37.4 mm
- High Speed and Good PLS
- On-chip Sequencer and SPI Control
- Excellent Resolution and Significant Frame Rate

### Application

- Automation & Inspection


Specifications			
Nr of Active Pixels	9344(H) x 7000(V)	Optical Format	2.3"
Pixel Size	3.2 $\mu\text{m}$ x 3.2 $\mu\text{m}$	Photosensitive Area	29.9 mm x 22.4 mm
Shutter Type	Global shutter	Peak QE	65.3% (500 nm)
Full Well Capacity	10.6 $\text{ke}^-$ (PGA gain 0.75x)	Parasitic Light Sensitivity	<-83.5 dB
Temporal Noise	1.9 $\text{e}^-$ (12 bit, PGA gain 6x), 7.5 $\text{e}^-$ (10 bit, PGA gain 1.25x)	Angular Response	>15° (80% Response)
Dark Current	5.3 $\text{e}^-$ /pixel/s (40°C)	Max. SNR	40.2 dB (PGA gain 1.0x)
Dynamic Range	66.0 dB (12 bit, PGA gain 1.25x), 62.3 dB (10 bit, PGA gain 1.25x)	Max Frame Rate	71 fps (10 bit), 31 fps (12 bit)
Output Format	56 ch Sub-LVDS	Channel Multiplexing	56/28/14/8/7/4/2/1
ADC	10/12 bit	Max. Data Rate	50.40 Gbps
Chroma	Mono, RGB Color	Power Consumption	<2.1 W (12 bit), <2.3 W (10 bit)
Supply Voltage	3.3 V/1.3 V (analog), 1.8 V - 3.3 V (IO), 1.3 V (digital)	Package	239 pins $\mu$ PGA (41.8 mm x 35.8 mm)

### Package Drawing

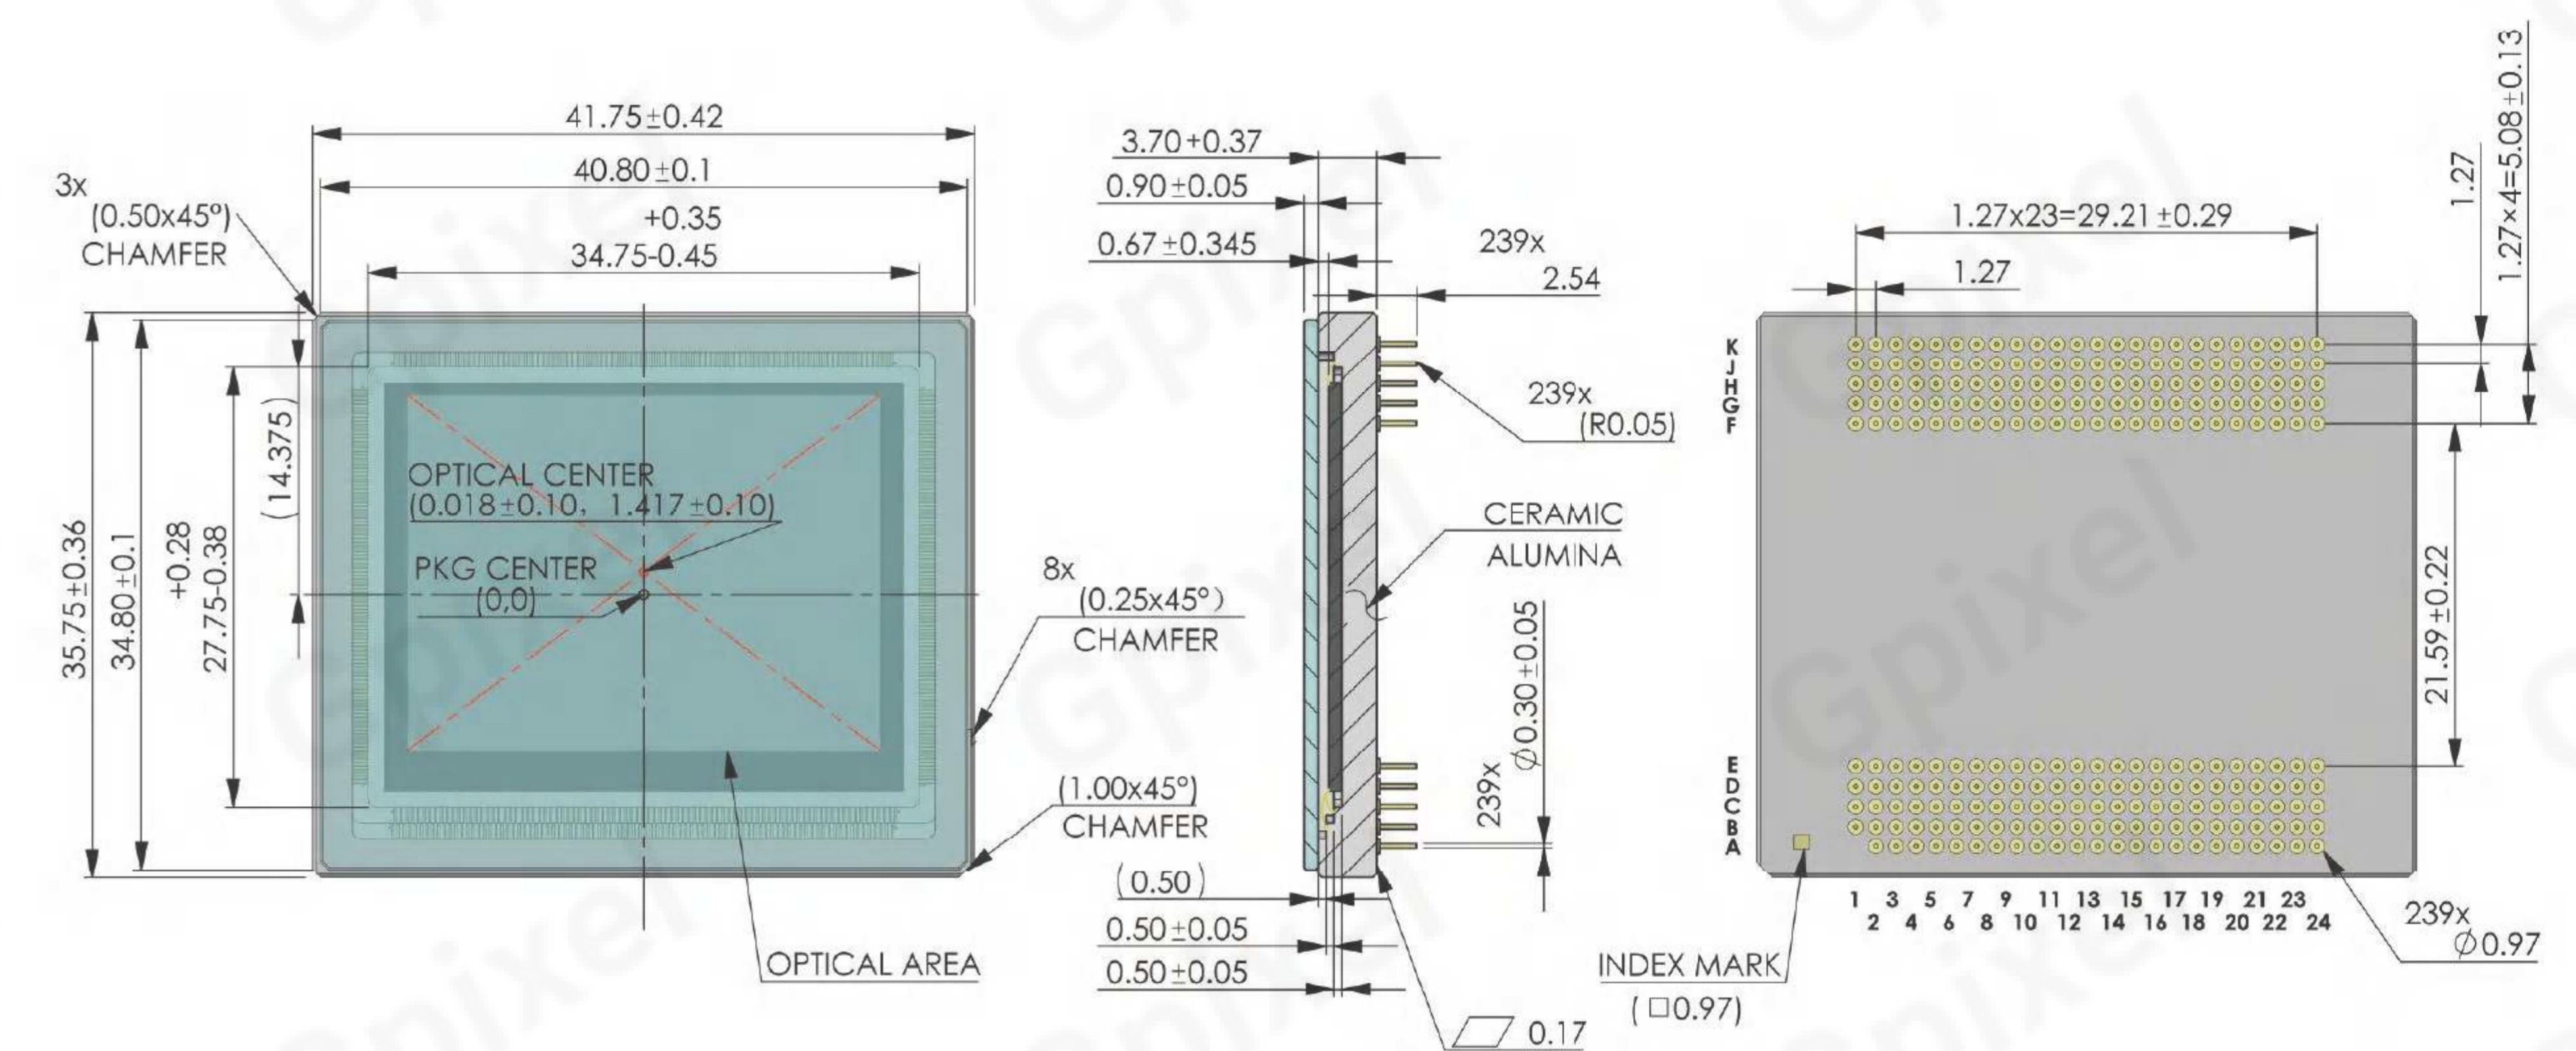


# GMAX32103

## 103MP GLOBAL SHUTTER CMOS IMAGE SENSOR

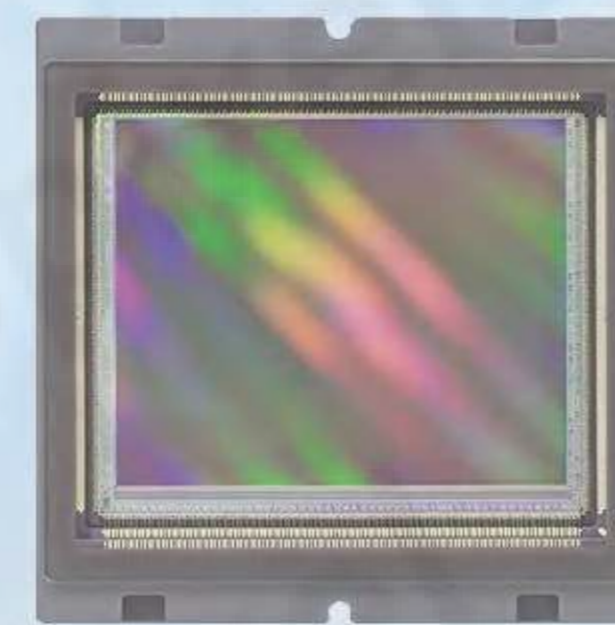

# GMAX64104

## 104MP GLOBAL SHUTTER CMOS IMAGE SENSOR

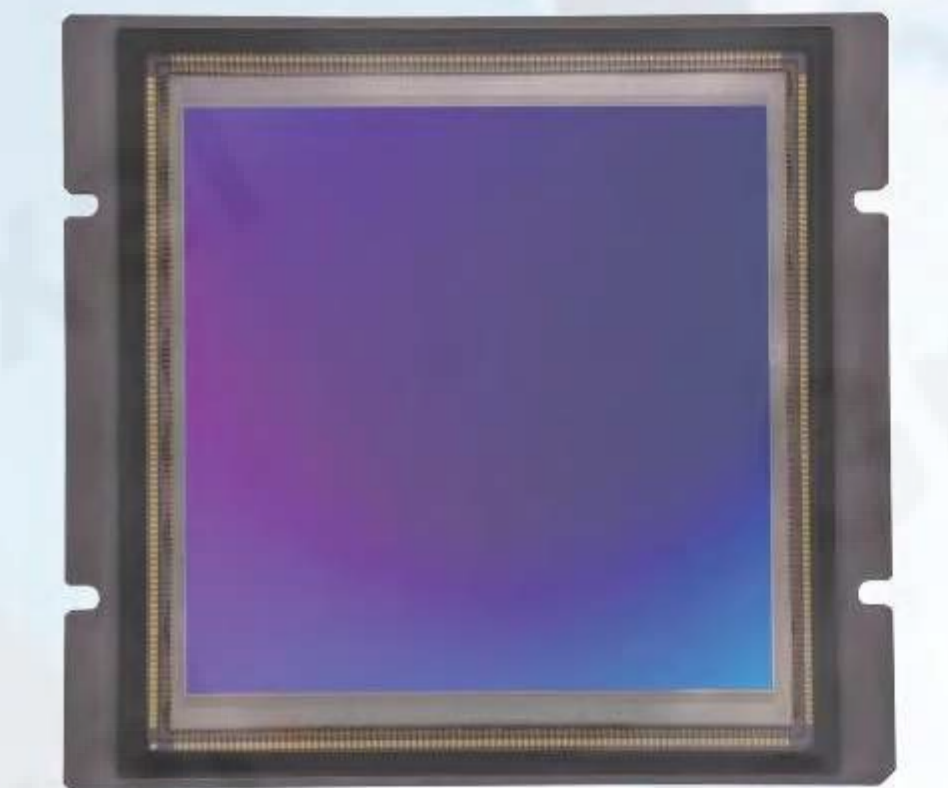

**GMAX32103** is a 103 Megapixel (11276 x 9200) medium-sized (46.6 mm) ultra-high resolution, global shutter image sensor designed with the latest 3.2  $\mu\text{m}$  charge domain global shutter pixel. It achieves more than  $9\text{ke}^-$  FWC at low gain and  $2.8\text{e}^-$  read noise at high gain separately with 66.4 dB intra-scene dynamic range. Using advanced 65 nm CIS process and light pipe technology, sensor achieves 66.9% peak QE (500 nm) and more than 1/15,000 shutter efficiency.

The full speed version sensor consists of 52 pairs sub-LVDS channels running at 960 Mbps which delivers a 24 fps in 12 bit operation at full resolution. The unique features make it an ideal solution for demanding imaging high end applications such as high-resolution inspection, aerial imaging and many more.

### Key Features and Benefits


- 3.2  $\mu\text{m}$  Global Shutter Pixel
- High Resolution up to 103 MP
- High Speed and Good PLS
- High Data Throughput up to 960 Mbps
- On Chip Sequencer and SPI Control

### Application

- Automation & Inspection
- Aerial Imaging

Specifications			
Nr of Active Pixels	11276(H) x 9200(V)	Optical Format	2.9"
Pixel Size	3.2 $\mu\text{m}$ x 3.2 $\mu\text{m}$	Photosensitive Area	36.1 mm x 29.4 mm
Shutter Type	Global shutter	Peak QE	66.9% (500 nm)
Full Well Capacity	9 $\text{ke}^-$ (PGA gain 1.4x)	Parasitic Light Sensitivity	<-83.5 dB
Temporal Noise	4.3 $\text{e}^-$ (PGA gain 1.4x)	Angular Response	>15° (80% Response)
Dark Current	1.4 $\text{e}^-$ /pixel/s (30°C)	Max. SNR	39.5 dB (PGA gain 1.4x)
Dynamic Range	66.4 dB (PGA gain 1.4x)	Max Frame Rate	24 fps
Output Format	52 ch Sub-LVDS	Channel Multiplexing	52/26/18/14/10/8/6
ADC	12 bit	Max. Data Rate	49.92 Gbps
Chroma	Mono, RGB Color	Power Consumption	<2.5 W
Supply Voltage	3.3 V/1.3 V (analog) ,1.8 V - 3.3 V (IO),1.2 V (digital)	Package	209 pins $\mu$ PGA (49.5 mm x 42.3 mm)

### Package Drawing

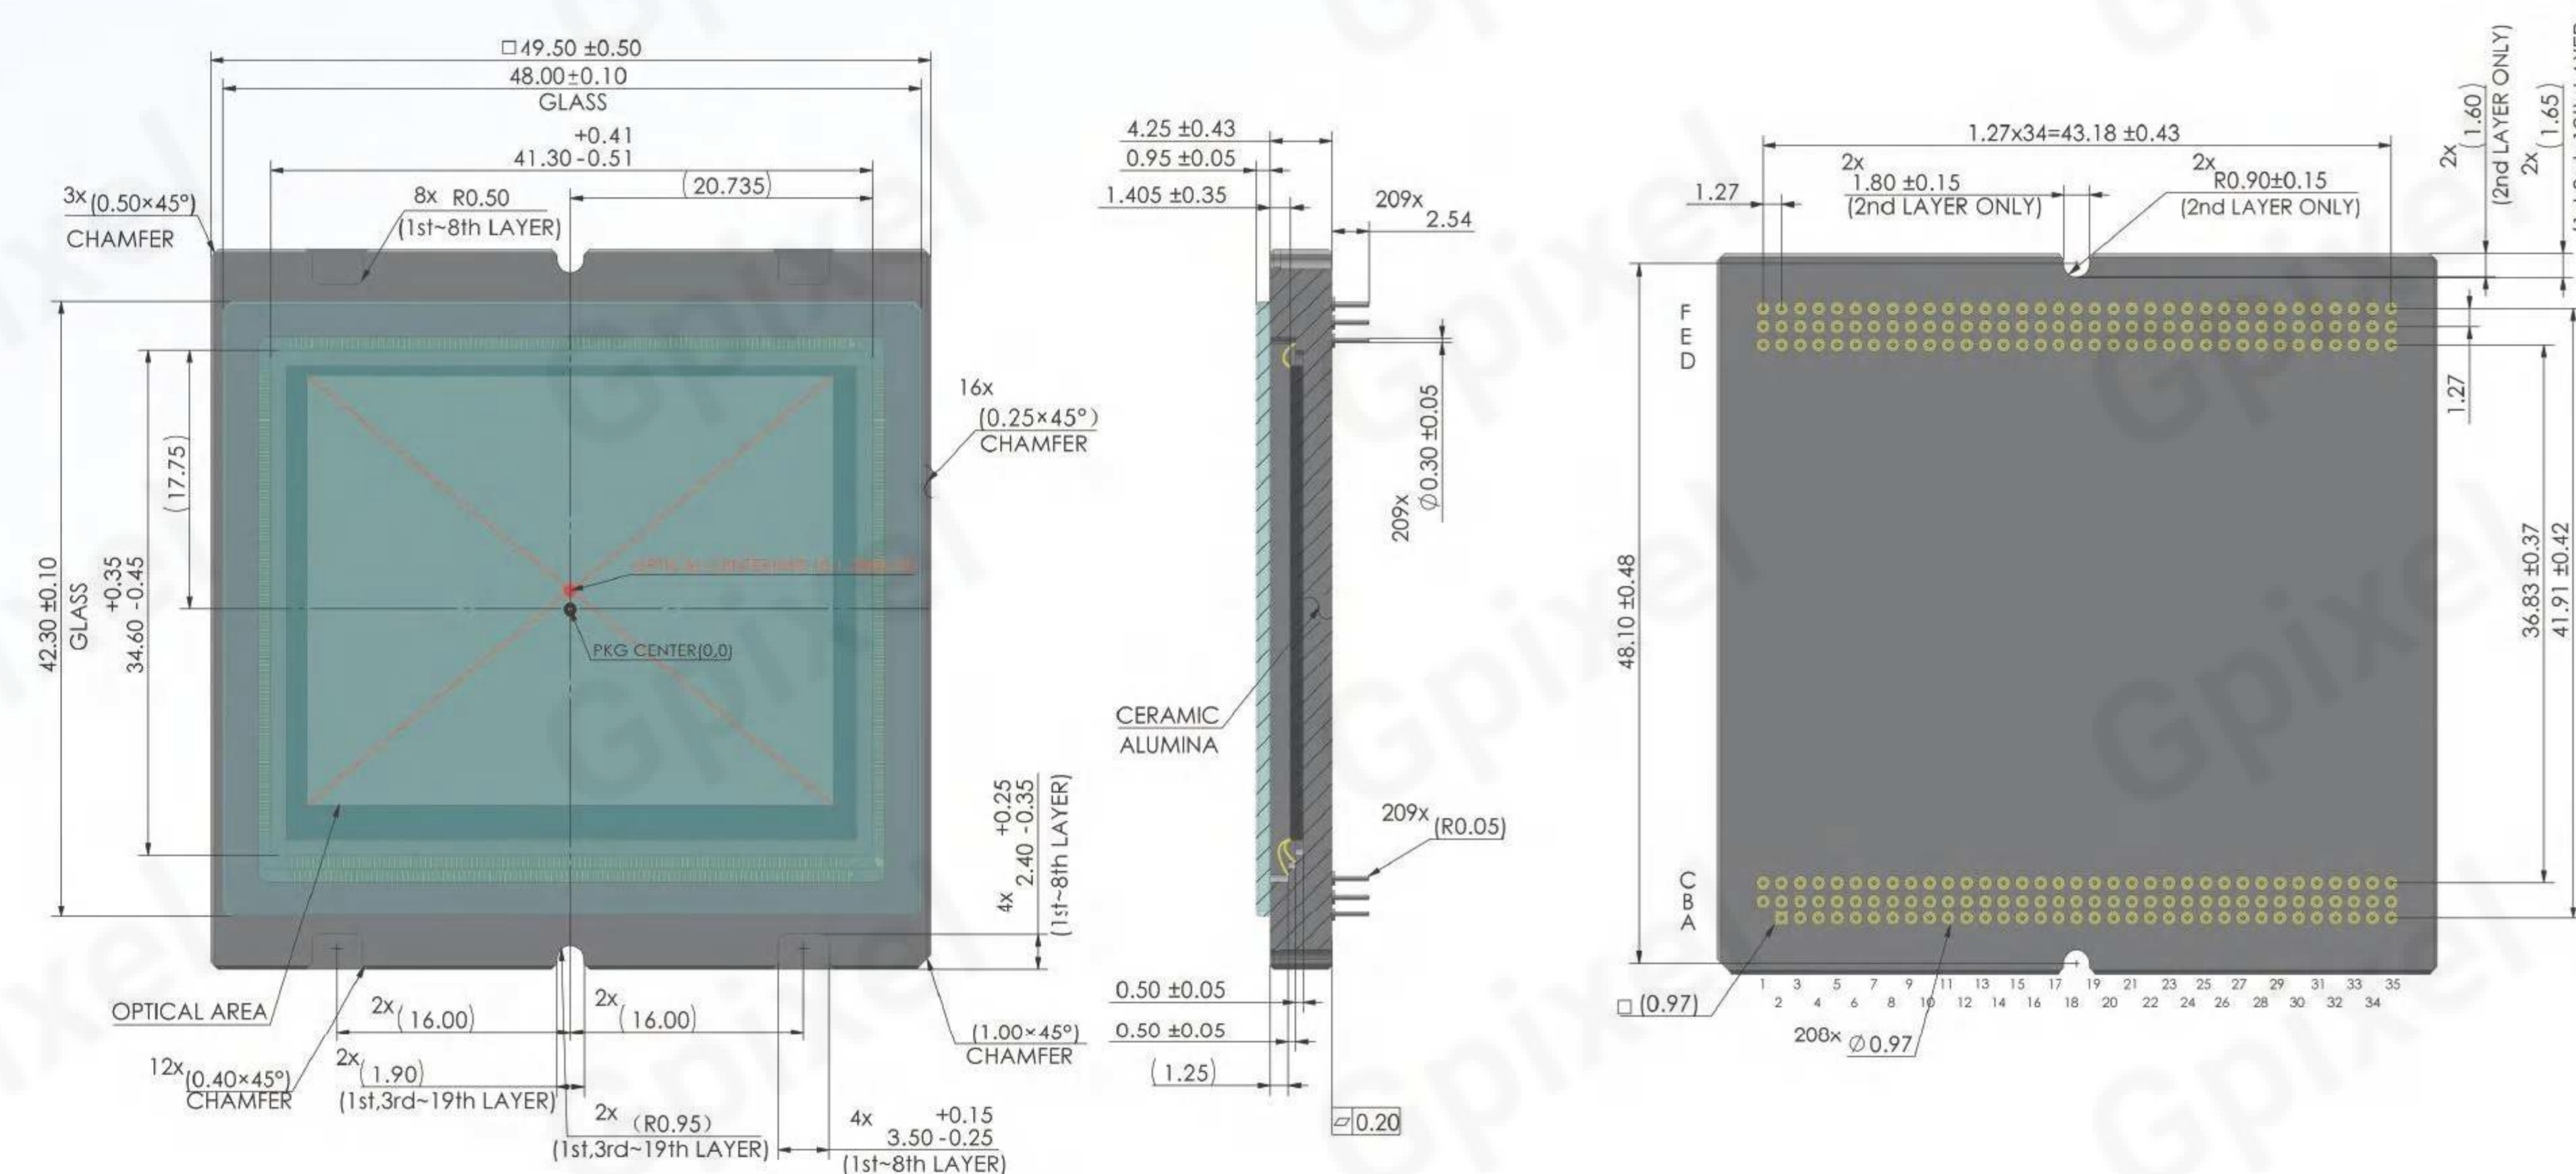

**GMAX64104** adopts a 6.4  $\mu\text{m}$  global shutter pixel design, with a pixel resolution of 10240 x 10240, and a large sensitivity area of 65.536 mm x 65.536 mm, which can satisfy the needs of large-field-of-view and high-precision applications such as aerial imaging and astronomical observation. The GMAX64104 is compatible with both shutter shutter and global shutter. The GMAX64104 is compatible with both shutter shutter and global shutter, and under global shutter, the chip supports both low-noise CDS and high-full-well DDS modes of operation. The GMAX64104 is packaged in a 327 pins PGA ceramic package measuring 93 mm x 87 mm, with a large blank space on the back of the package to facilitate the camera's heat dissipation design.

### Key Features and Benefits


- Global Shutter & Rolling Shutter
- High Sensitivity, High Dynamic Range
- Large Target Surface, 100 Million Ultra-High Resolution
- Maximum Frame rate: 13.5 fps

### Application

- Aerial Imaging
- astronomical observation
- microscopic imaging
- life sciences


Specifications			
Nr of Active Pixels	10240(H) x 10240(V)	Photosensitive Area	65.536 mm x 65.536 mm
Pixel Size	6.4 $\mu\text{m}$ x 6.4 $\mu\text{m}$	Peak QE	$\geq 65\%$
Shutter Type	Global Shutter & Rolling Shutter	Parasitic Light Sensitivity	<1:50000
Full Well Capacity	20 $\text{ke}^-$ (RS HDR & GS CDS),65 $\text{ke}^-$ (GS DDS)	Angular Response	>20° (80% Response)
Temporal Noise	2.7 $\text{e}^-$ (RS HDR),12.2 $\text{e}^-$ (GS CDS),47 $\text{e}^-$ (GS DDS)	Max. SNR	48.1 dB
Max Frame Rate	12 fps (GS),12 fps (GS DDS),4.8 fps (RS HDR)	Dark Current	$\leq 10\text{e}^-$ /pixel/s (25°C,GS)
Dynamic Range	77.3 dB (RS HDR),63 dB (GS)	Max. Data Rate	22.14 Gbps (GS),44.28 Gbps (RS HDR)
Output Format	41 ch LVDS (GS),82 ch LVDS (RS HDR)	Power Consumption	$\leq 5\text{ W}$
ADC	12 bit	Chroma	Mono
Supply Voltage	3.6 V (analog)/1.2 V (digital)/1.2 V-3.3 V (I/O)	Package	327 pins PGA (93.0 mm x 87.0 mm)

### Package Drawing

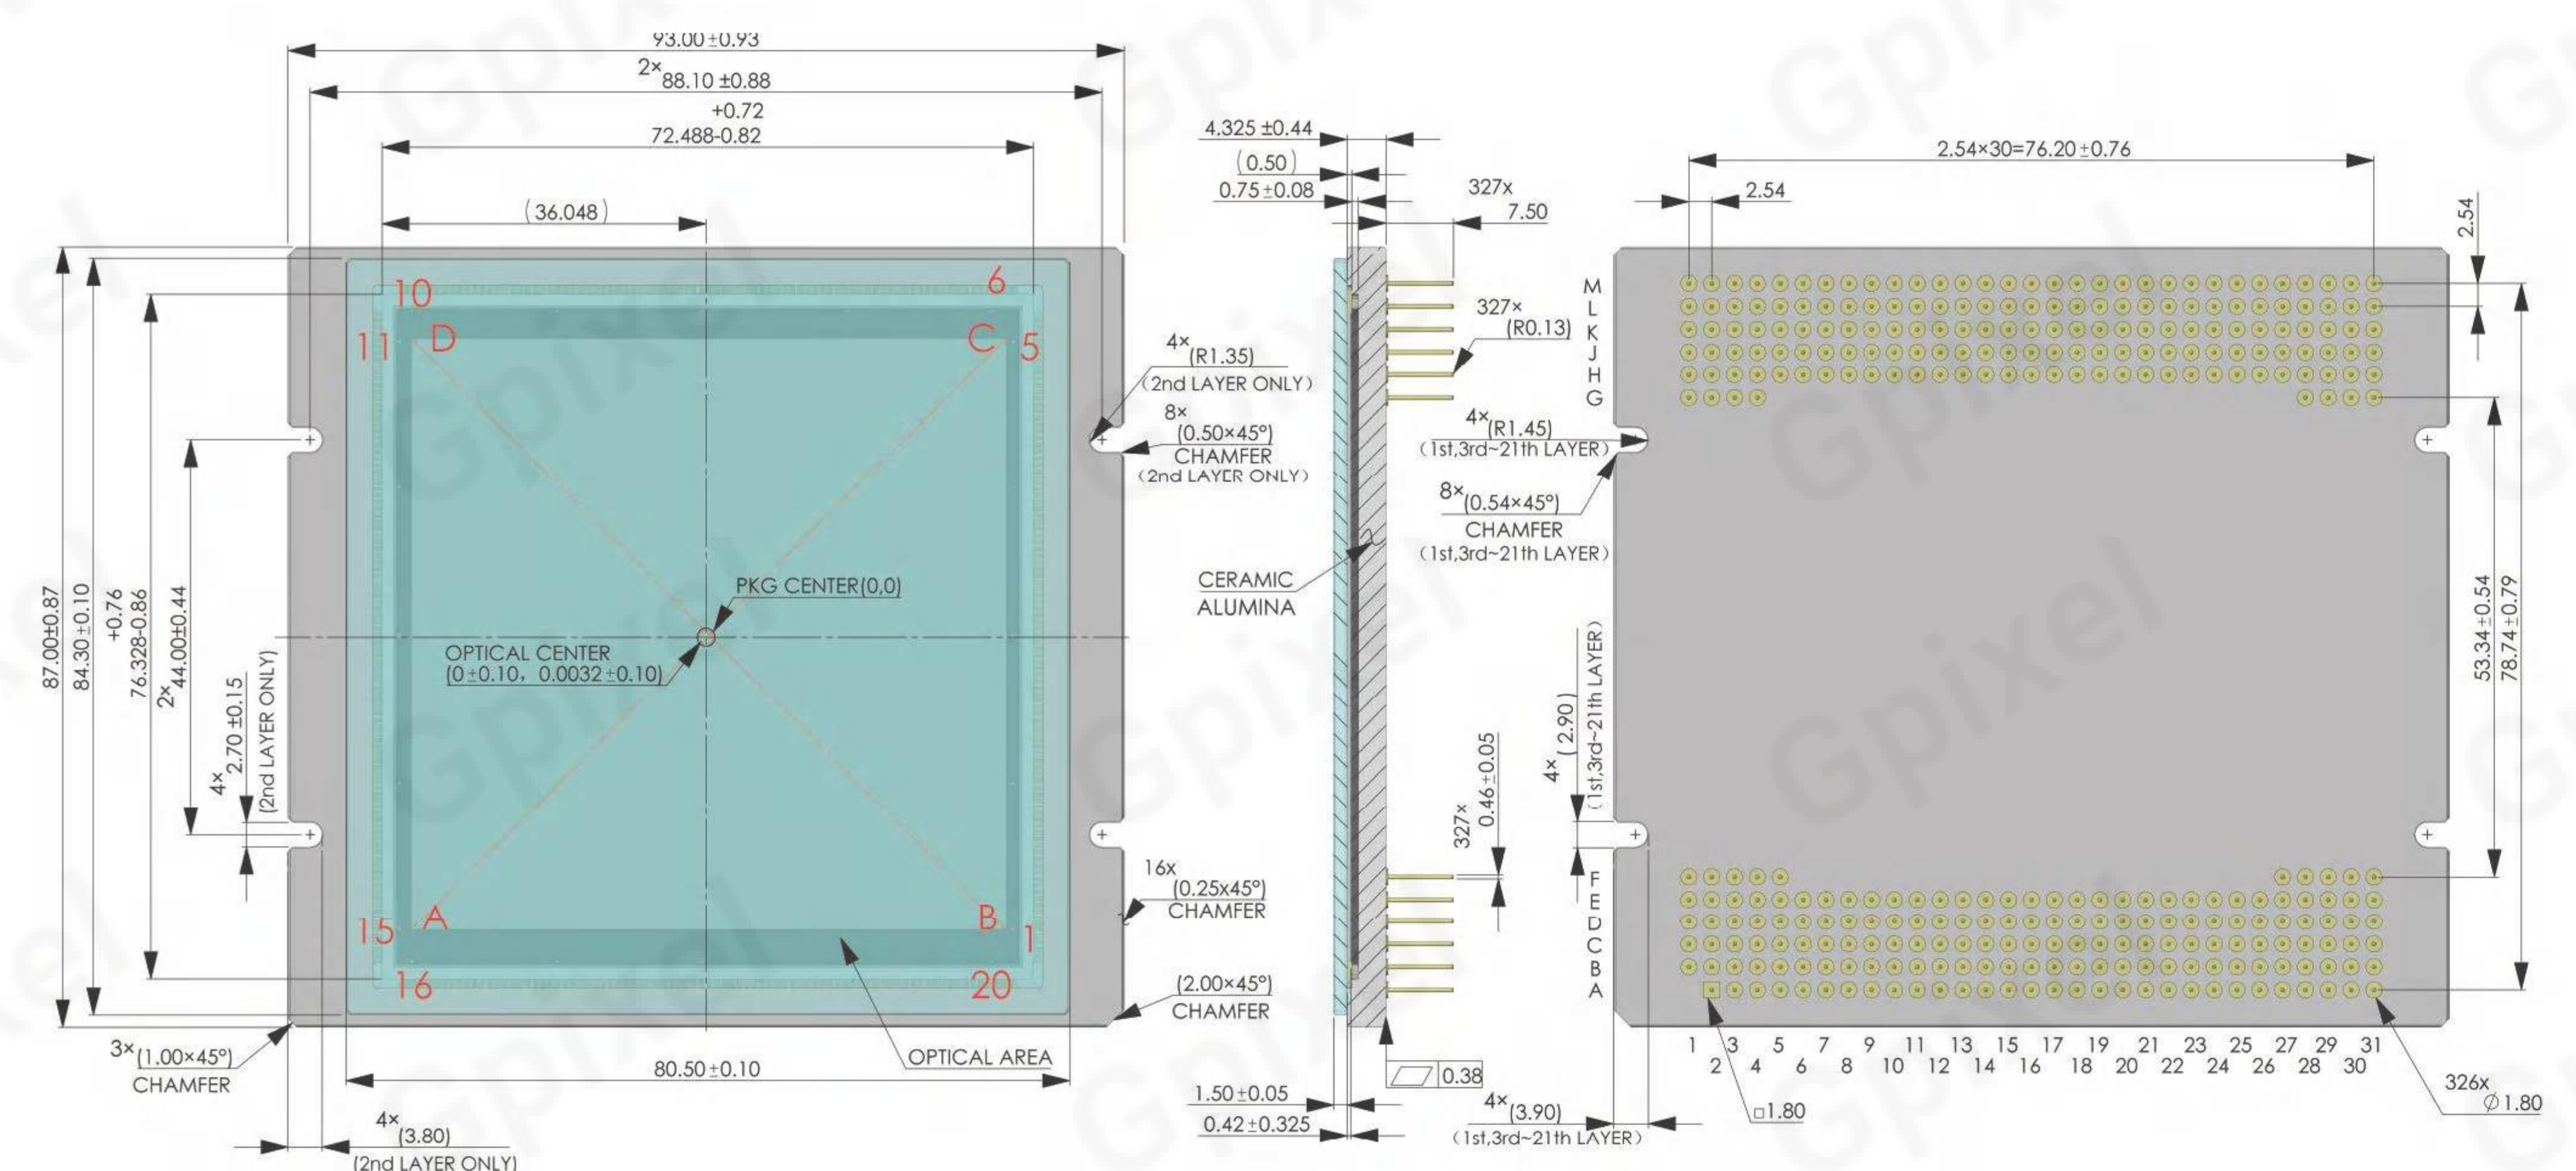

# GMAX32152

## 152MP GLOBAL SHUTTER CMOS IMAGE SENSOR

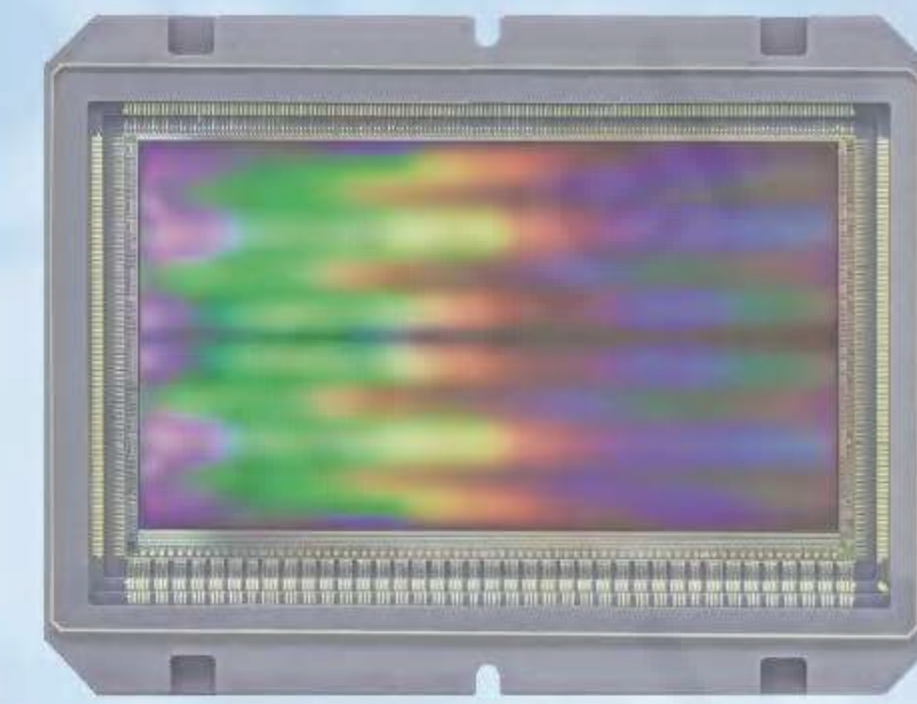

GMAX32152 is an ultra-high resolution global shutter CMOS image sensor in medium format. Using a state-of-the-art charge domain pixel architecture, this sensor delivers an attractive combination of high frame rate and high dynamic range. A native 12 bit performance pixel achieves 67.3 dB dynamic range, combined with a high speed sub-LVDS delivering 16 fps. Pixel data is read out over serial differential pairs, with source synchronous clock and control channel.

Its medium format image area and wide aspect ratio make it well suited for aerial mapping and surveying applications and cultural heritage digitization.

### Key Features and Benefits


- 3.2  $\mu\text{m}$  Global Shutter Pixel
- High Data Throughput up to 960 Mbps
- Large Image Plane of 60.6 mm Diagonal
- High Speed and Good PLS
- Low Noise Global Shutter

### Application

- Automation & Inspection
- Aerial Imaging
- Document Imaging


Specifications			
Nr of Active Pixels	16556(H) x 9200(V)	Optical Format	3.7"
Pixel Size	3.2 $\mu\text{m}$ x 3.2 $\mu\text{m}$	Photosensitive Area	53.0 mm x 29.4 mm
Shutter Type	Global shutter	Peak QE	66.9% (500 nm)
Full Well Capacity	9.3 $\text{ke}^-$ (PGA gain 1.4x)	Parasitic Light Sensitivity	<-83.5 dB
Temporal Noise	4.0 $\text{e}^-$ (PGA gain 1.4x)	Angular Response	>15° (80% Response)
Dark Current	1.4 $\text{e}^-/\text{pixel/s}$ (30°C)	Max. SNR	39.6 dB (PGA gain 1.4x)
Dynamic Range	67.3 dB (PGA gain 1.4x)	Max Frame Rate	16 fps
Output Format	38 ch Sub-LVDS	Channel Multiplexing	38/20/14/11/8/5
ADC	12 bit	Max. Data Rate	36.48 Gbps
Chroma	Mono, RGB Color	Power Consumption	<2.8 W
Supply Voltage	3.3 V/1.3 V (analog), 2.5 V - 3.3 V (IO), 1.2 V (digital)	Package	183 pins $\mu\text{PGA}$ (68.2 mm x 52.0 mm)

### Package Drawing

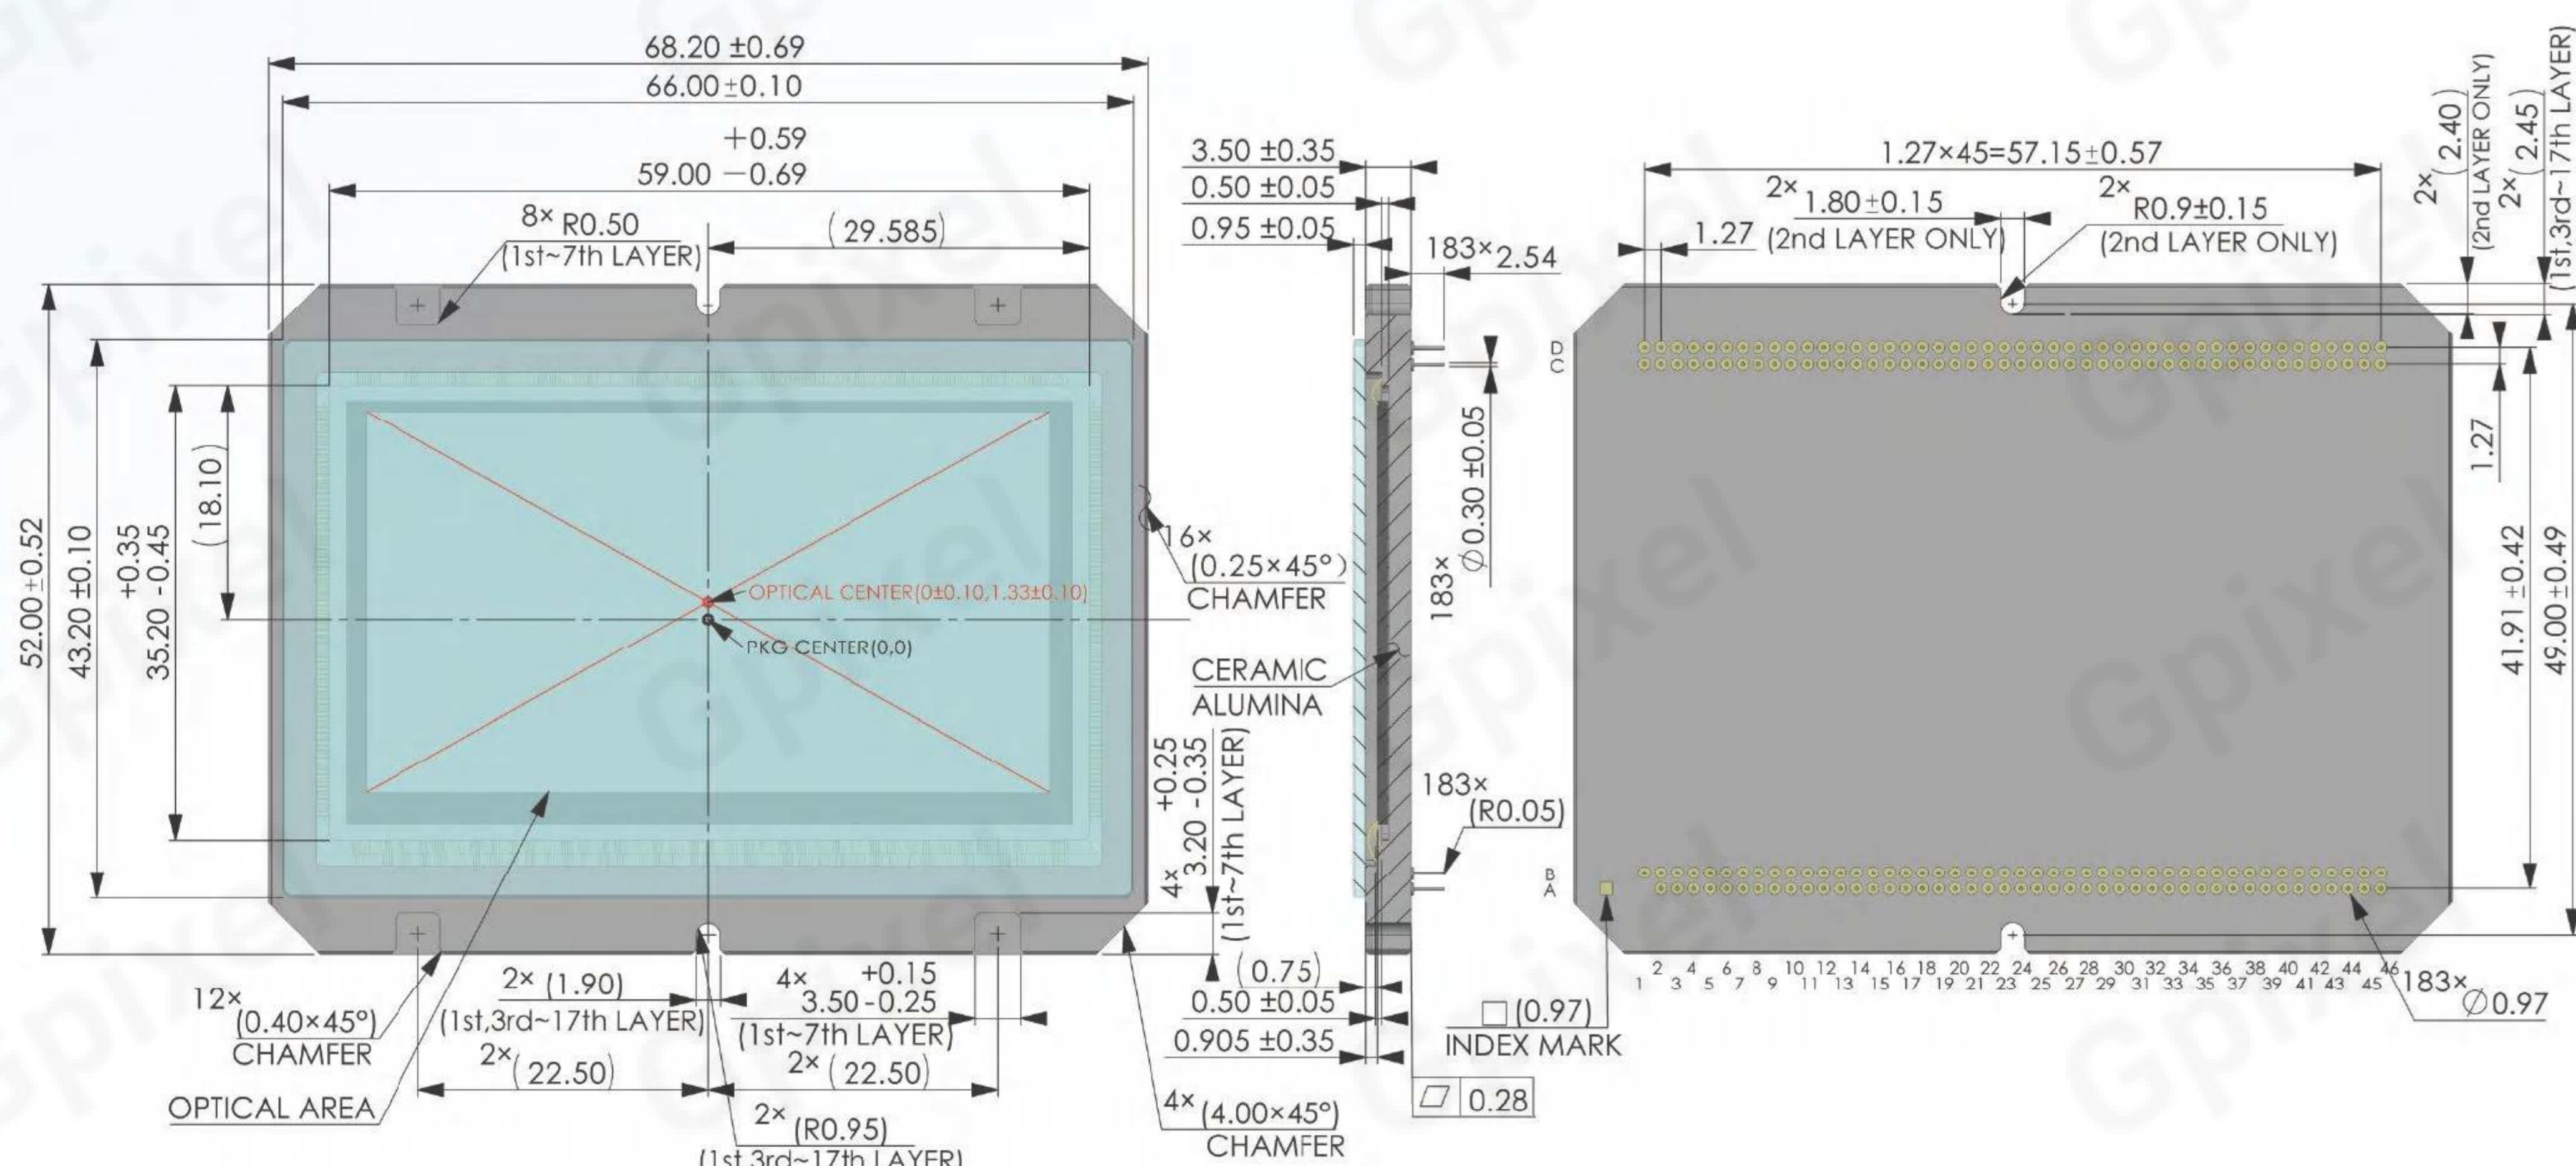

# GMAX15271BSI

## 271MP 1.5 $\mu\text{m}$ 2.24" ROLLING SHUTTER IMAGE SENSOR

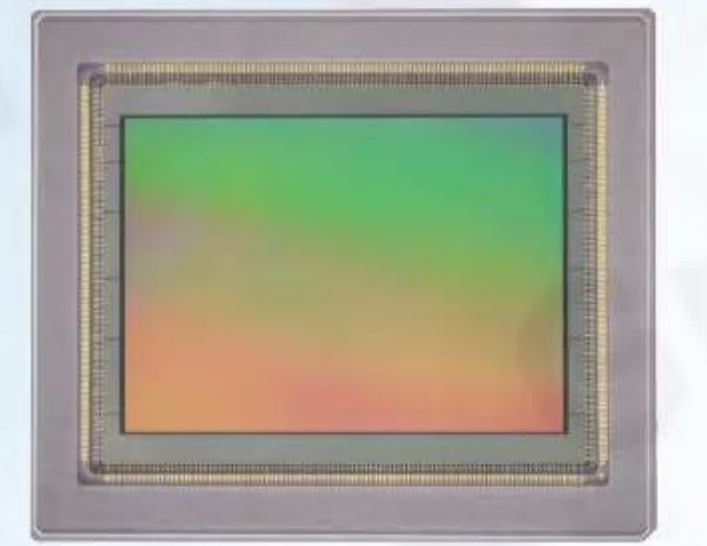

GMAX15271BSI is a state-of-the-art rolling shutter CMOS image sensor engineered for ultra-high-resolution imaging, delivering 19,376 (H) x 14,000 (V) pixel resolution on a compact 35.9 mm diagonal image format. Leveraging advanced 1.5  $\mu\text{m}$  Back-Side Illuminated (BSI) pixel technology, GMAX15271BSI maximizes light sensitivity and spatial efficiency while maintaining exceptional image quality. It supports dual ADC modes for versatile operation. Designed for high-end industrial and scientific applications, GMAX15271BSI excels in tasks requiring extreme detail and dynamic range, including flat panel display (FPD) inspection, semiconductor and PCB defect detection, precision manufacturing quality control, document scanning and cultural heritage archiving, aerial mapping, pathology, and genomics.

### Key Features and Benefits


- 1.5  $\mu\text{m}$  BSI Rolling Shutter Pixel
- Rolling Readout with Global Reset
- 271 MP Resolution of 35.9 mm Image Format Diagonal
- Frame Rate up to 8.5 fps

### Application

- High-end industrial inspection
- Display screen inspection
- Biological microscopy
- Gene sequencing

Specifications			
Nr of Active Pixels	19376(H) x 14000(V)	Optical Format	2.24"
Pixel Size	1.5 $\mu\text{m}$ x 1.5 $\mu\text{m}$	Photosensitive Area	29.1 mm x 21.0 mm
Shutter Type	Rolling Shutter	Peak QE	76.7% (520 nm)
Full Well Capacity	5.4k $\text{e}^-$ (14 bit, PGA gain 1.0x), 5.1k $\text{e}^-$ (12 bit, PGA gain 1.0x)	Parasitic Light Sensitivity	-
Temporal Noise	1.1 $\text{e}^-$ (14 bit, PGA gain 4.1x), 1.7 $\text{e}^-$ (12 bit, PGA gain 4.1x)	Angular Response	>17° (80% Response)
Max. SNR	37.3 dB (14 bit, PGA gain 1.0x), 37.0 dB (12 bit, PGA gain 1.0x)	Dark Current	2.5 $\text{e}^-/\text{pixel/s}$ (42 °C)
Dynamic Range	73.8 dB (14 bit, PGA gain 1.0x), 69.5 dB (12 bit, PGA gain 1.0x)	ADC	12/14 bit
Output Format	32 ch Sub-LVDS data output, 2 ch Sub-LVDS clock output	Channel Multiplexing	32/16/8/4 (Sub-LVDS)
Max Frame Rate	4.8 fps (14 bit, 1.2G Sub-LVDS), 8.5 fps (12 bit, 1.2G Sub-LVDS)	Chroma	Mono, RGB Color
Max. Data Rate	19.2 Gbps (14 bit, Sub-LVDS), 38.4 Gbps (12 bit, Sub-LVDS)	Power Consumption	< 2.6 W (14 bit), < 3.0 W (12 bit)
Supply Voltage	4.5 V and -2.0 V (pixel), 3.3 V (analog), 1.8 V - 3.3 V (IO), 1.2 V (digital)	Package	161 pins $\mu\text{PGA}$ (41.75 mm x 35.75 mm)

### Package Drawing

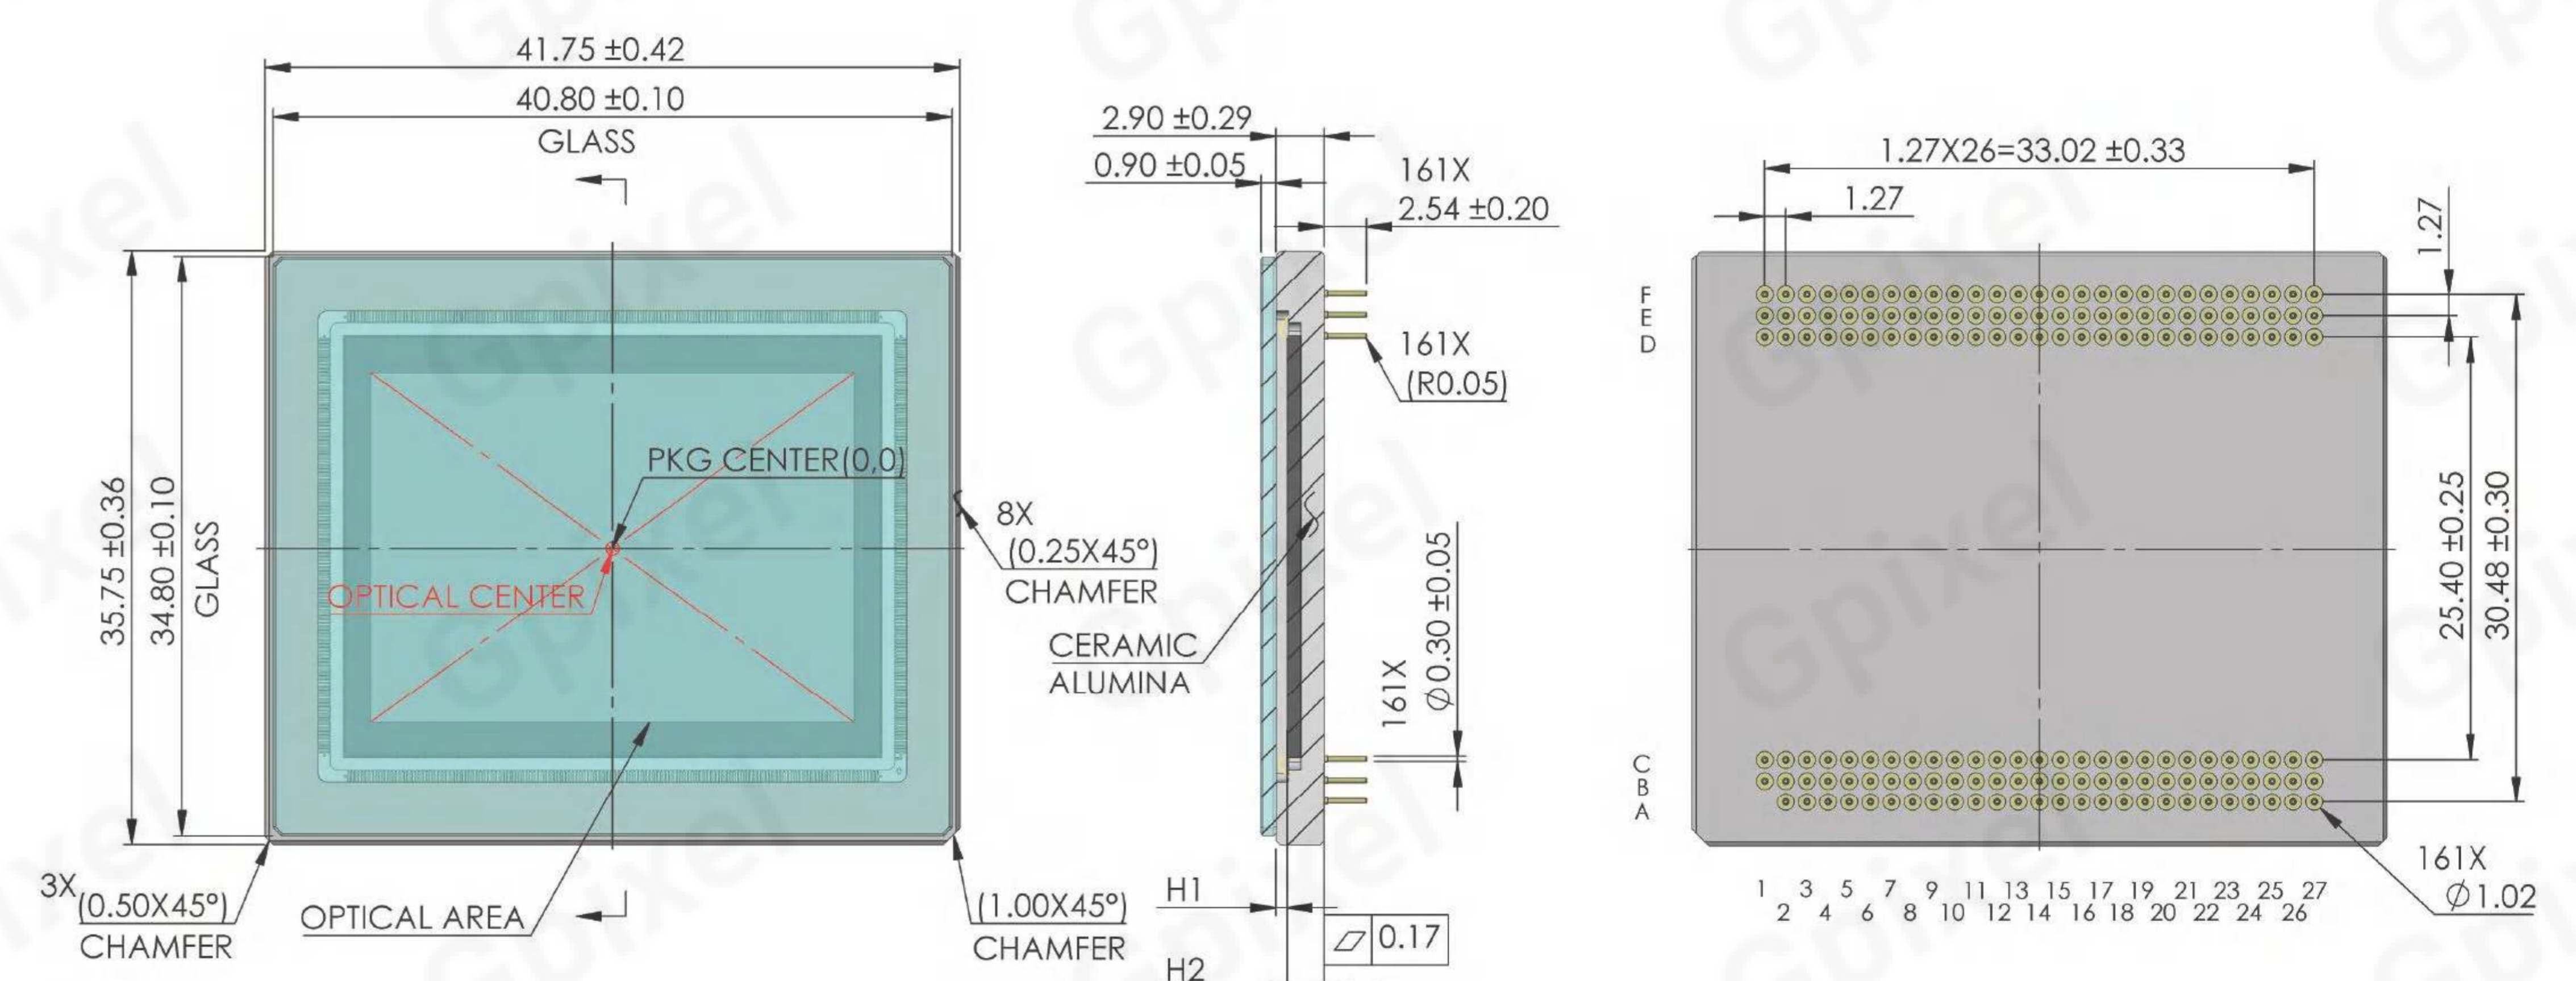

GMAX | **GSPRINT** | GSENSE | GLUX | GTOF | GCINE | GL | GXS | GIR

## Area Scan CMOS Image Sensor

The GSPRINT series is Gpixel's high-speed global shutter product family, including the 21 MP GSPRINT4521. The GSPRINT technology will be used to expand the sizes and resolutions available in the family over the next year.

GSPRINT2001BSI

GSPRINT6502BSI

GSPRINT4502

GSPRINT4510

GSPRINT5514BSI

GSPRINT4521

### Product Family Features

- Global Shutter
- High speed
- 1.3MP-21MP resolution
- Low noise


### Applications

- Automation & Inspection
- High-throughput scientific imaging
- Slow motion video
- 3D Laser Profiling



# GSPRINT2001BSI

## 1.3MP GLOBAL SHUTTER HIGH SPEED IMAGE SENSOR

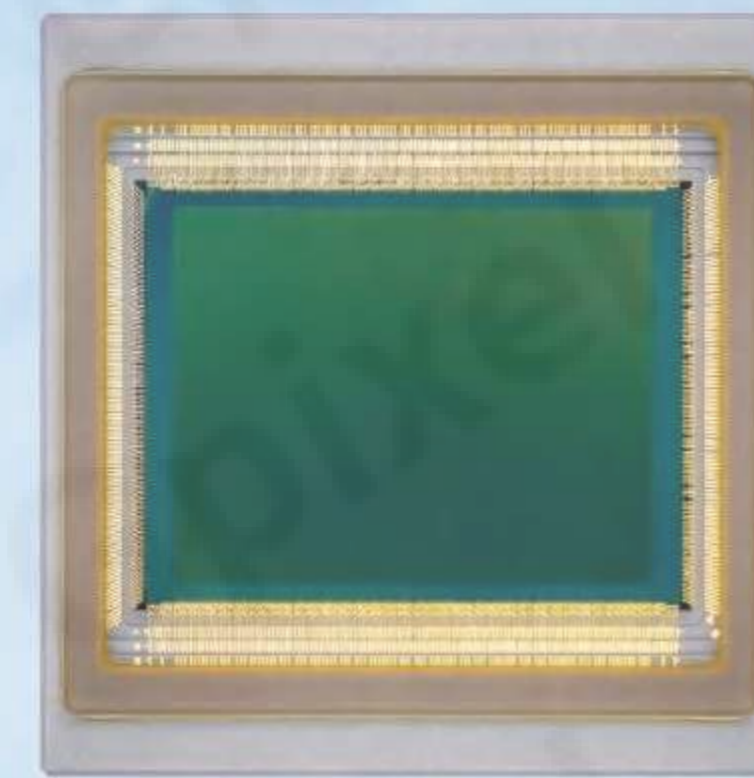

**GSPRINT2001BSI** is 1.3 Megapixel (1280 x 1024) CMOS image sensor featuring backside-illuminated (BSI) global shutter pixels and a large 20 μm pixel size for outstanding sensitivity under low-light conditions. Engineered for high-speed imaging, it achieves up to 6,400 frames per second at 10 bit resolution, output over 64 pairs of Sub-LVDS channels running at 1.4 Gbps. With Quantum Efficiency (QE) reaching 87% at 440 nm and a significant UV response with 69% at 230 nm, GSPRINT2001BSI excels in capturing even the faintest signals under challenging lighting conditions. The sensor supports both monochrome and RGB Bayer color options, and offers advanced features such as Dual PIV mode with a minimum inter-frame time of 250 ns, making it ideal for demanding applications in scientific, PIV, metrology and various other high-speed imaging applications.

### Key Features and Benefits


- Back Side Illumination (BSI) Global Shutter pixels
- Ultra High Speed: Up to 6400 fps (10 bit)
- 20 μm Pixel Size delivers exceptional sensitivity
- UV sensitivity with 42 % (260 nm)<sup>①</sup> and 87% (450 nm)<sup>②</sup>

### Application

- High Speed Imaging
- Particle Image Velocimetry (PIV) Imaging
- Metrology
- Scientific and Life Science

Specifications			
<b>Nr of Active Pixels</b>	1280 (H) x 1024 (V)	<b>Optical Format</b>	2.05"
<b>Pixel Size</b>	20 μm x 20 μm	<b>Photosensitive Area</b>	25.60 mm x 20.48 mm
<b>Shutter Type</b>	Global Shutter	<b>Peak QE</b>	87% (440 nm)
<b>Full Well Capacity</b>	12 ke <sup>-</sup>	<b>Parasitic Light Sensitivity</b>	-120 dB
<b>Temporal Noise</b>	19 e <sup>-</sup>	<b>Max. SNR</b>	40.8 dB
<b>Dynamic Range</b>	56 dB	<b>Output Format</b>	Sub-LVDS
<b>Max Frame Rate</b>	6400 fps	<b>Channel Multiplexing</b>	64/32/16
<b>ADC</b>	10 bit	<b>Max. Data Rate</b>	89.6 Gbps
<b>Chroma</b>	Monochrome & CFA	<b>Power Consumption</b>	7.5 W
<b>Supply Voltage</b>	3.3 V (Analog), 1.8 V (I/O), 1.25 V (Digital)	<b>Package</b>	720 pins LGA (41 mm x 42 mm)

### Package Drawing

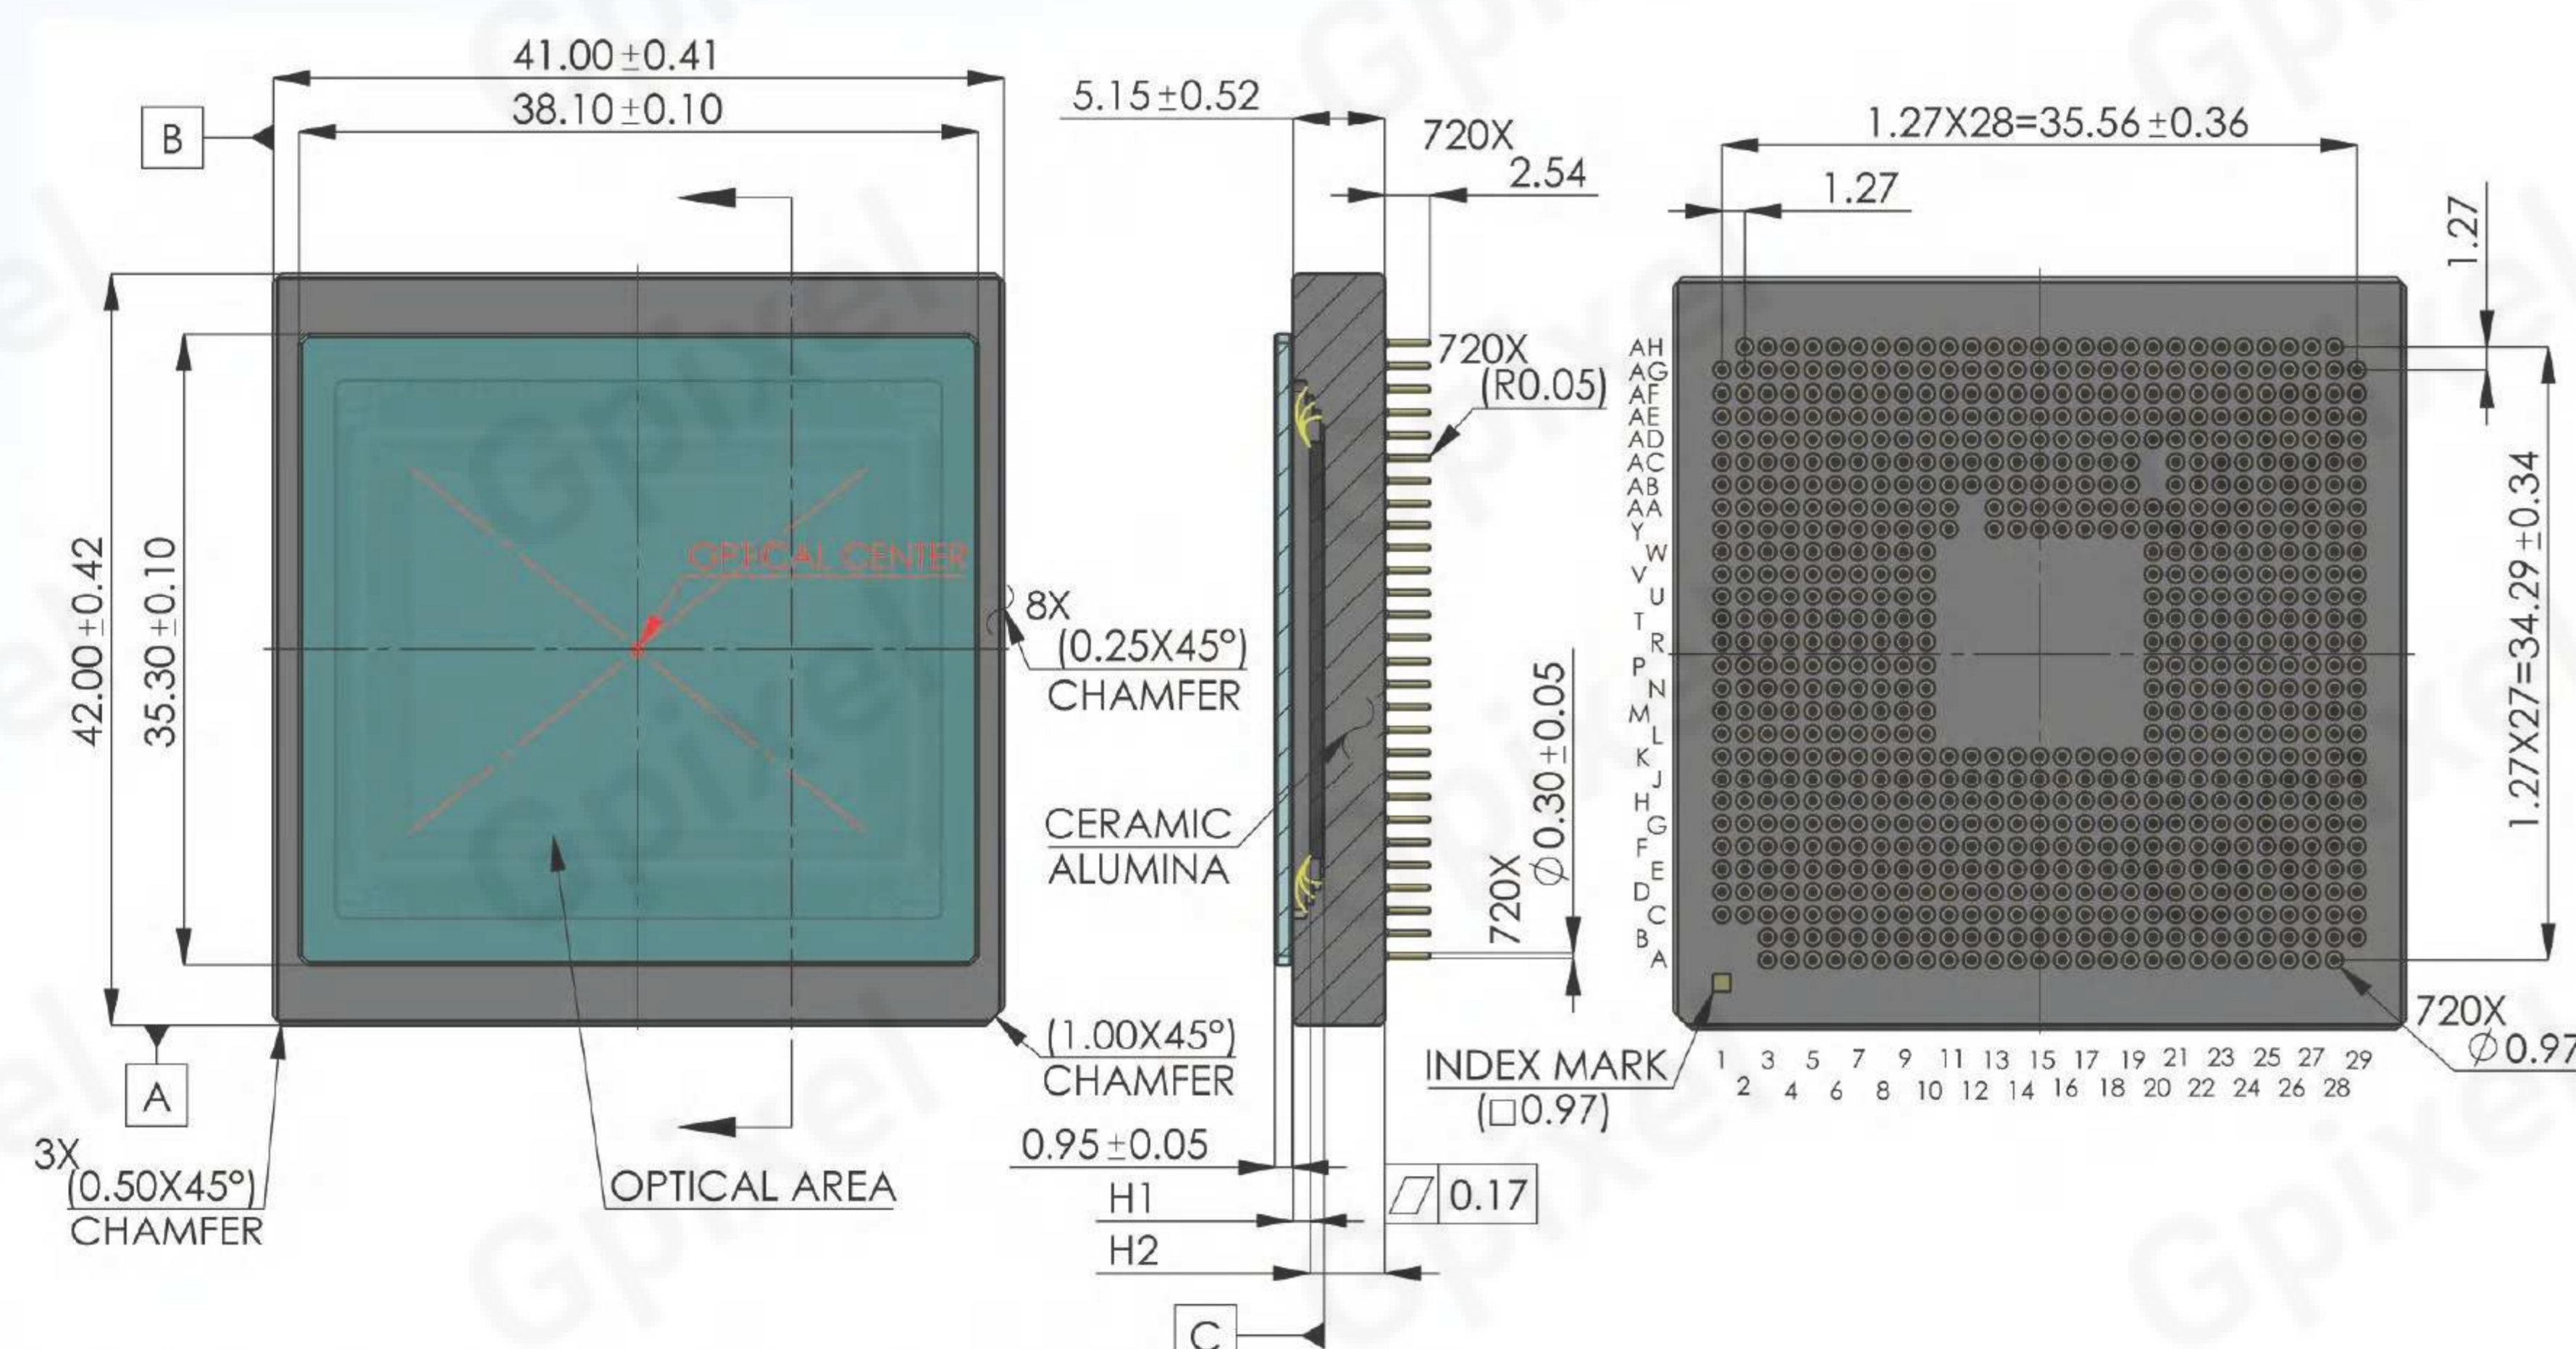

Note: ① Quartz glass version ② D 263® T glass version

# GSPRINT6502BSI

## 2MP GLOBAL SHUTTER CMOS IMAGE SENSOR



The sensor features 2048 (H) x 1152 (V) pixels, each 6.5 μm square, providing a wide format ideal for 3D laser profilers, and compatibility with 1" optics. With 10 bit output and 32 pairs of Sub-LVDS outputs each operating at 1.2 Gbps, the GSPRINT6502BSI achieves 1498 frames per second. Up to 8 vertically oriented regions of interest can be defined to operate the sensor at increased frame rates. For applications in which the maximum frame rate is not required, multiplexing modes are available to reduce the number of output channels by any multiple of 2. Backside illumination technology ensures that the image sensor is sensitive to light across a wide range. At 1x PGA gain, the sensor's full well capacity is 10.1 ke<sup>-</sup> and the dynamic range is 53.4 dB. The analog gain can be adjusted from 1x up to 4x. On-chip 2x vertical binning can be used to increase the full well capacity, dynamic range, and frame rate. A vertical sub-sampling mode is also available for increased frame rate while maintaining the full field of view.

### Key Features and Benefits


- BSI
- Multi-Slope HDR
- High Frame Rate
- Broad AR

### Application

- Automation & Inspection
- Spectroscopy
- Life Sciences
- Microscopy
- High Speed Imaging

Specifications			
<b>Nr of Active Pixels</b>	2048 (H) x 1152 (V)	<b>Optical Format</b>	1"
<b>Pixel Size</b>	6.5 μm x 6.5 μm	<b>Photosensitive Area</b>	13.3 mm x 7.5 mm
<b>Shutter Type</b>	Global Shutter	<b>Peak QE</b>	86% (440 nm)
<b>Full Well Capacity</b>	10.1 ke <sup>-</sup> (10 bit, PGA gain x1.0)	<b>Angular Response</b>	35 ° (80% Response)
<b>Temporal Noise</b>	21.4 e <sup>-</sup> (10 bit, PGA gain 1.0x)	<b>Max. SNR</b>	40.0 dB
<b>Dynamic Range</b>	53.4 dB (10 bit, PGA gain x1.0)	<b>Output Format</b>	32 ch Sub-LVDS
<b>Max Frame Rate</b>	1498 fps (10 bit), 2941 fps (10 bit, 1x2 Binning)	<b>Channel Multiplexing</b>	Yes (any multiple of 2)
<b>ADC</b>	10 bit	<b>Max. Data Rate</b>	38.4 Gbps
<b>Chroma</b>	Mono	<b>Power Consumption</b>	1.5 W
<b>Supply Voltage</b>	3.6 V/3.3 V (analog), 1.8 V/3.3 V (IO), 1.5 V (digital)	<b>Package</b>	130 pins LGA (25.66 mm x 22.05 mm)


### Package Drawing

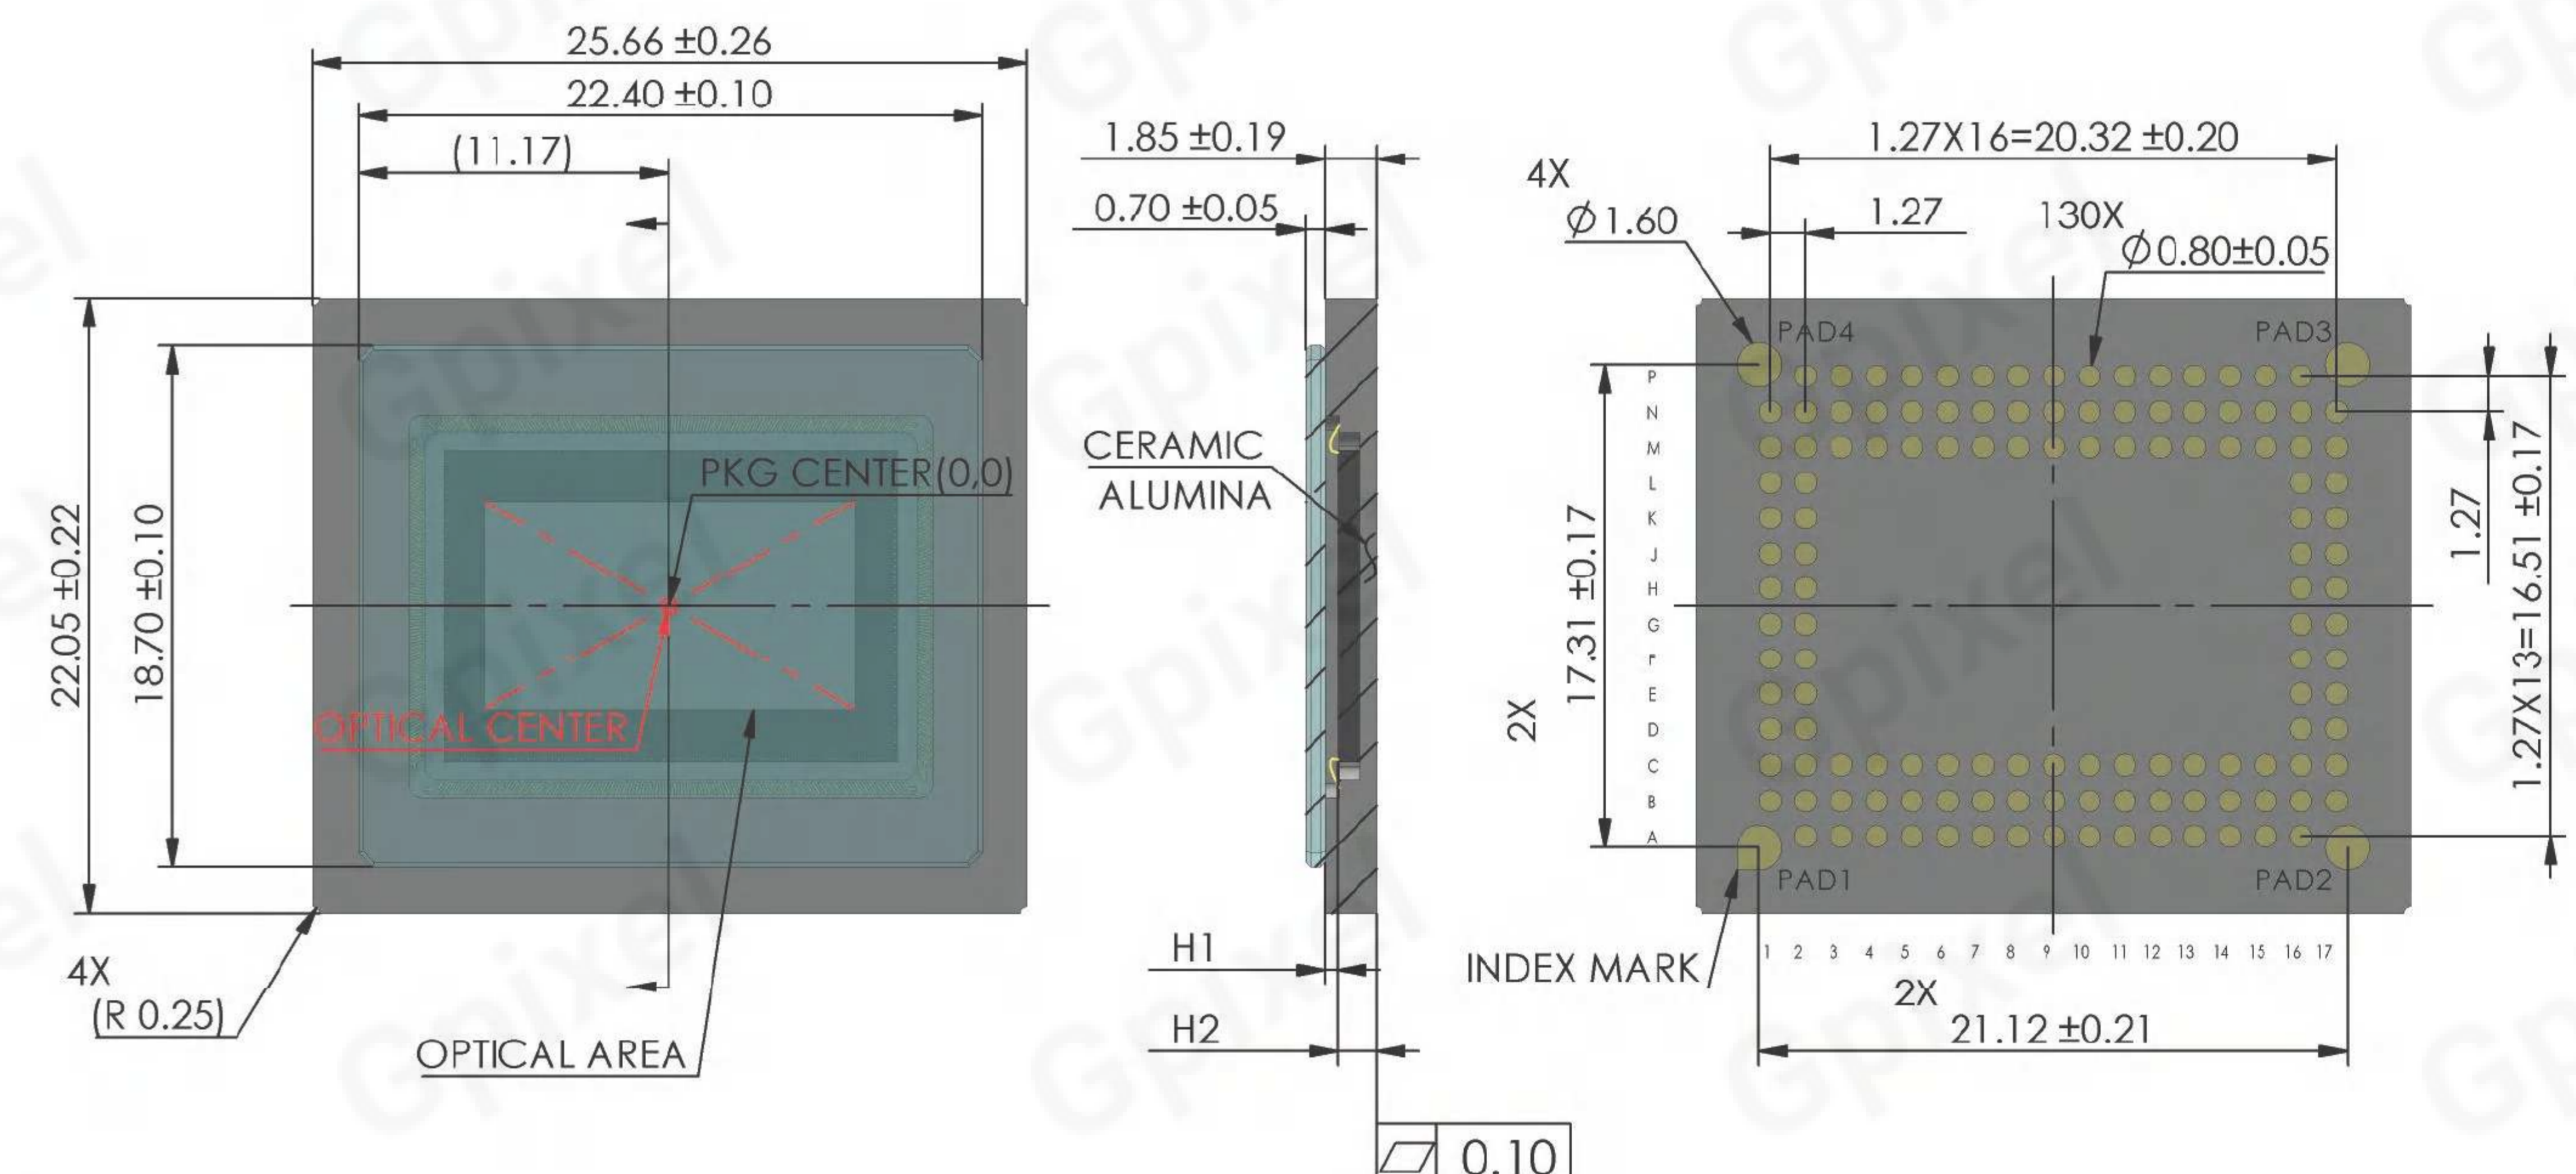



# GSPRINT5514BSI

## 14MP HIGH SPEED CMOS IMAGE SENSOR

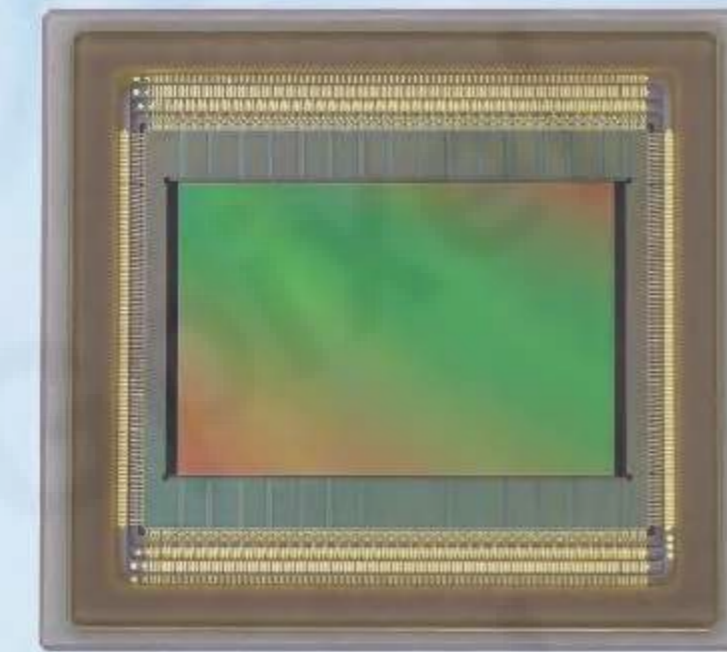

**GSPRINT5514BSI** features 4608 x 3072 pixels, each 5.5 μm square – a 4/3 aspect ratio 4k sensor compatible with APS-C optics. With 10 bit output GSPRINT5514BSI achieves 670 frames per second full well capacity with a minimum 2.0 e<sup>-</sup> noise to achieve an outstanding 77.5 dB of dynamic range. Analog 1 x 2 binning increases the full well capacity to 30 ke<sup>-</sup>. Up to 8 vertically oriented regions of interest can be defined to operate the sensor at increased frame rates. The image data is output via 96 Sub-LVDS channels (1.2 Gbps). For applications in which. In 12 bit mode the sensor outputs 350 fps. Using backside illumination technology, the sensor achieves 83% quantum efficiency (510 nm) and 17% (200 nm) for UV applications. The sensor offers dual gain HDR readout, maximizing 15 ke<sup>-</sup> when the maximum frame rate is not required, multiplexing modes are available to reduce the number of output channels by any multiple of two.

### Key Features and Benefits


- Back Side Illuminated (BSI) Global Shutter Pixels
- High Sensitivity
- High Speed: Up to 670 fps (10 bit)
- 86% QE (510nm)

### Application

- Automation & Inspection
- Cinematography
- High Speed Imaging


Specifications			
<b>Nr of Active Pixels</b>	4608(H) x 3072(V)	<b>Optical Format</b>	APS
<b>Pixel Size</b>	5.5 μm x 5.5 μm	<b>Photosensitive Area</b>	25.34 mm x 16.90 mm
<b>Shutter Type</b>	Global Shutter	<b>Peak QE</b>	83%
<b>Full Well Capacity</b>	15 ke <sup>-</sup>	<b>Parasitic Light Sensitivity</b>	<-80 dB
<b>Temporal Noise</b>	<1.84 e <sup>-</sup> (Dual 12 bit HDR & 12 bit, gain 4)	<b>Angular Response</b>	30° (80% Response)
<b>Dynamic Range</b>	78.2 dB (Dual 12 bit), 66.4 dB (12 bit), 61.9 dB (10 bit)	<b>Max. SNR</b>	41.79 dB (12 bit, gain 0)
<b>Max Frame Rate</b>	670 fps (10 bit), 350 fps (12 bit), 80 fps (Dual 12 bit)	<b>Dark Current</b>	54.2 e <sup>-</sup> /pixel/s (60°C)
<b>Output Format</b>	84 ch Sub-LVDS	<b>Channel Multiplexing</b>	Yes (any multiple of 4)
<b>ADC</b>	10/12 bit	<b>Max. Data Rate</b>	94.84 Gbps
<b>Chroma</b>	Mono & RGB Color	<b>Power Consumption</b>	Max. 3.4 W (idle), Max. 4.94 W (streaming)
<b>Supply Voltage</b>	3.3 V (analog), 1.8 V (IO), 1.2 V (digital)	<b>Package</b>	454 pins μPGA (42 mm x 38 mm)

### Package Drawing

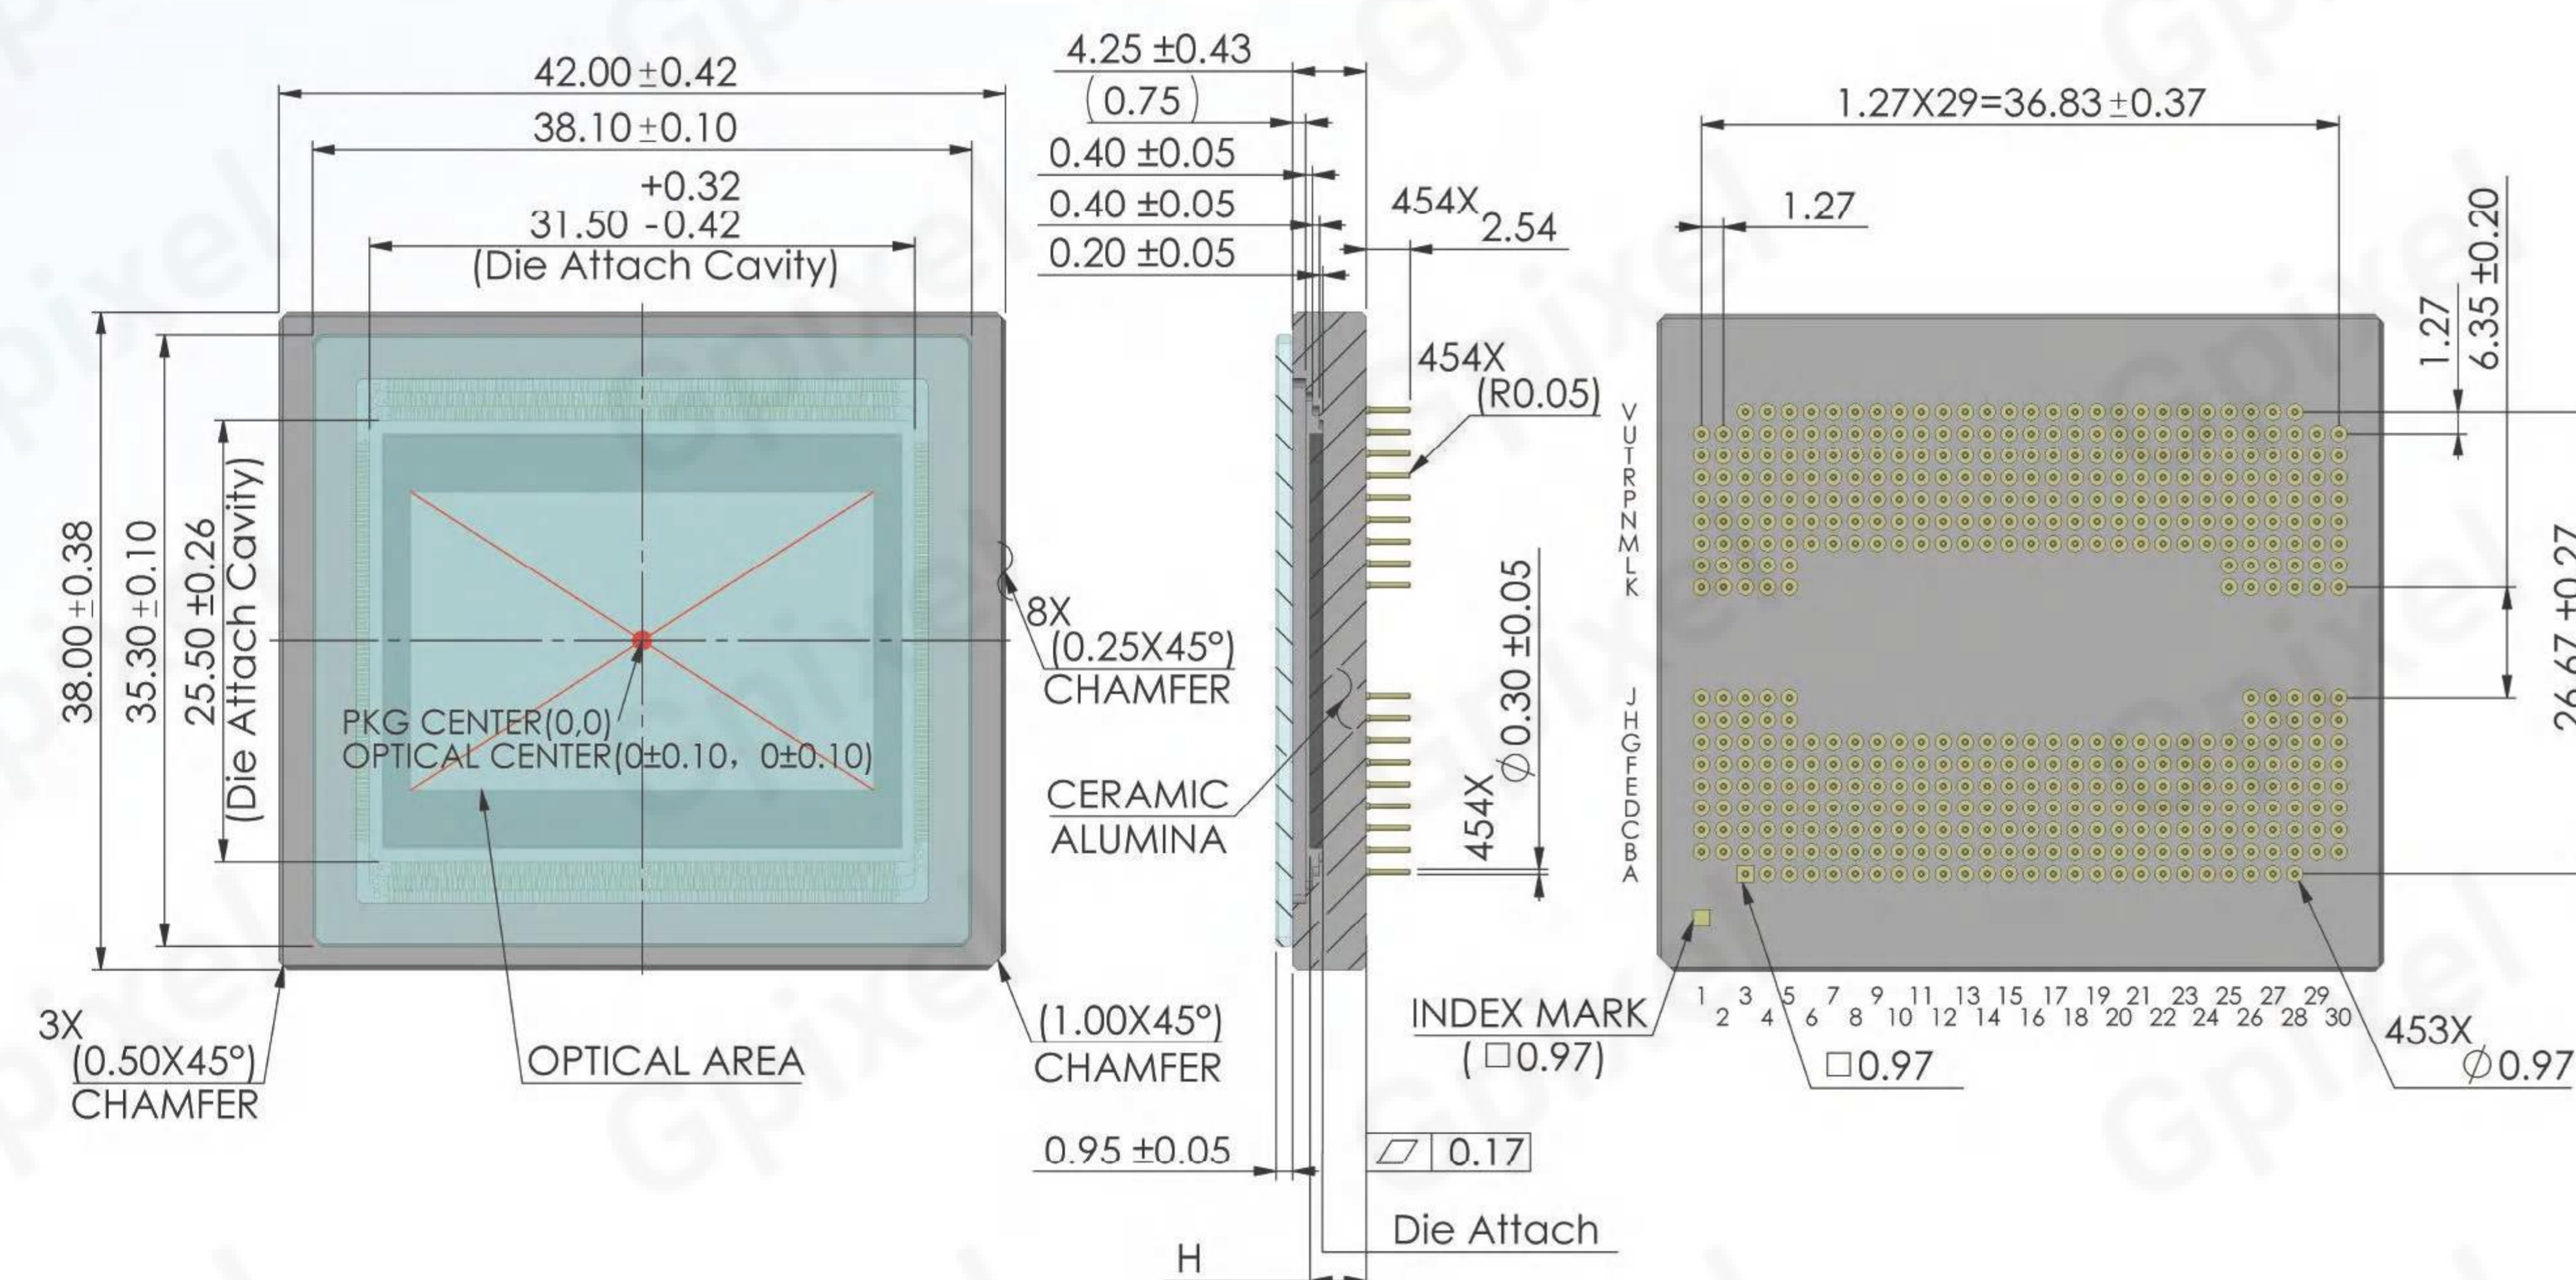

# GSPRINT4521

## 21MP GLOBAL SHUTTER HIGH SPEED IMAGE SENSOR

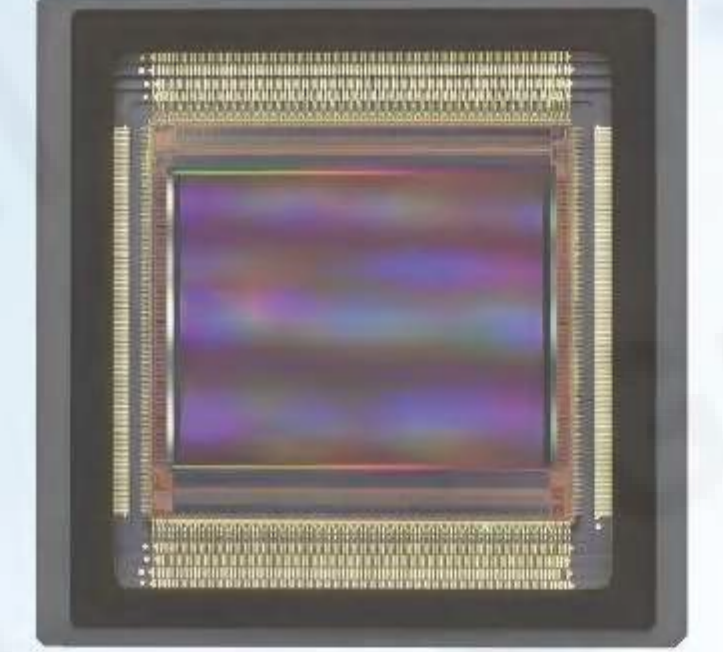

**GSPRINT4521** is a 21 MP (5120 x 4096) APS sized (29.5 mm diameter) high speed, global shutter image sensor designed with the latest 4.5 μm charge domain global shutter pixel. It achieves 32 ke<sup>-</sup>, less than 3 e<sup>-</sup> rms read noise and > 69 dB dynamic range, optionally increased to 81 dB with a dual gain HDR mode. Its state-of-the-art 65 nm CIS process allows the sensor to use on-chip charge binning, further increasing FWC and almost quadrupling frame rate.

**GSPRINT4521** will be offered in two speed variants. The full speed variant consists of 160 pairs sub-LVDS channels running at 1.2 Gbps which delivers a stunning 1000 fps in single gain operation at 8 bit per pixel and full resolution, and more than 3500 fps with a ROI of 1024 rows in a dedicated 3D laser profiling mode. These unique features make it an ideal solution for demanding imaging in high-end applications such as high speed 4K video, industrial inspection, motion analysis and life science imaging.

### Key Features and Benefits


- High Frame Rate
- Low Noise Global Shutter
- Dual Gain HDR Mode

### Application

- Automation & Inspection
- Cinematography
- High Speed Imaging

Specifications			
<b>Nr of Active Pixels</b>	5120(H) x 4096(V)	<b>Optical Format</b>	1.84" (APS-C)
<b>Pixel Size</b>	4.5 μm x 4.5 μm	<b>Photosensitive Area</b>	23.04 mm x 18.43 mm
<b>Shutter Type</b>	Global Shutter	<b>Peak QE</b>	>63 % (500 nm)
<b>Full Well Capacity</b>	32 ke <sup>-</sup>	<b>Parasitic Light Sensitivity</b>	<-86 dB
<b>Temporal Noise</b>	3.5 e <sup>-</sup>	<b>Angular Response</b>	17° (80% Response)
<b>Dark Current</b>	11.4 e <sup>-</sup> /pixel/s (50°C)	<b>Max. SNR</b>	45 dB
<b>Max Frame Rate</b>	1000 fps (8 bit), 500 fps (10 bit), 250 fps (12 bit)	<b>Dynamic Range</b>	68 dB (12 bit)
<b>Output Format</b>	160 ch Sub-LVDS	<b>Channel Multiplexing</b>	160/156/152/.../4 (any multiple of 4)
<b>ADC</b>	8/10/12 bit	<b>Max. Data Rate</b>	192 Gbps
<b>Chroma</b>	Mono, RGB Color	<b>Power Consumption</b>	6 W
<b>Supply Voltage</b>	3.3 V (analog), 1.8 V (IO), 1.2 V (digital)	<b>Package</b>	454 pins μPGA, 42 mm x 42 mm

### Package Drawing

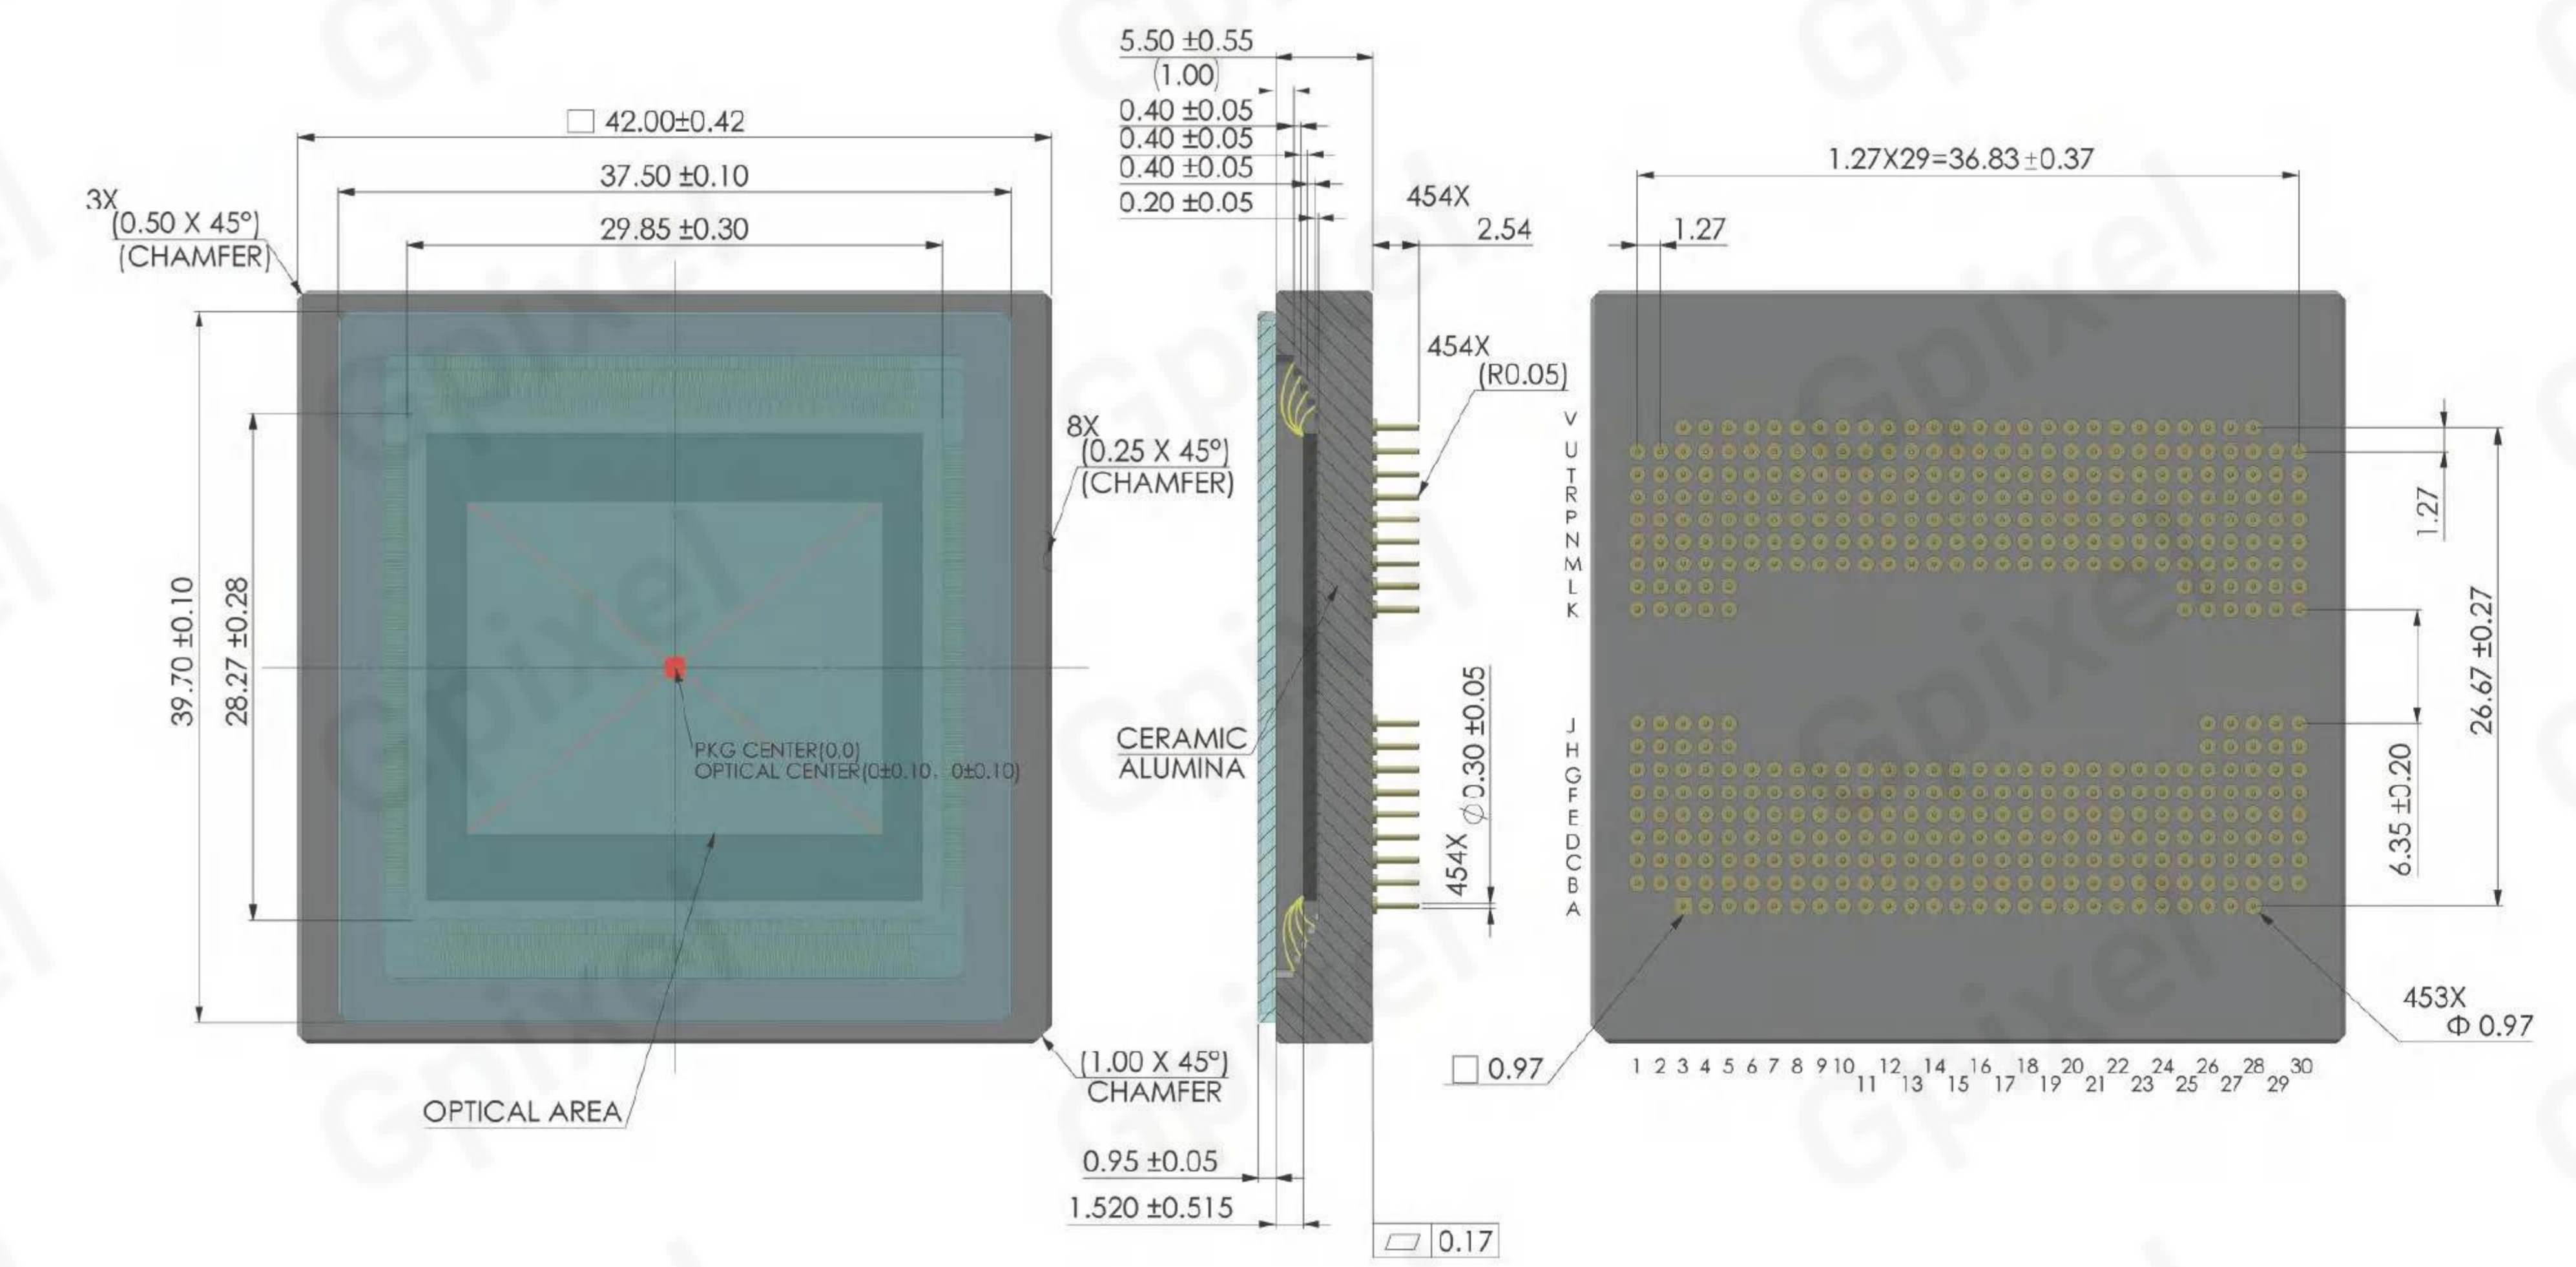

GMAX | GSPRINT | **GSENSE** | GLUX | GTOF | GCINE | GL | GX5 | GIR

## Area Scan CMOS Image Sensor

The GSENSE series is a world leading scientific CMOS image sensor family, designed with correlated multiple sampling for extreme low noise, true HDR for high dynamic range and optional backside illumination technology for quantum efficiency of up to 97%. Primary applications include scientific imaging, medical imaging, spectroscopy, fluorescence imaging, astronomy, high energy physics, and high-end surveillance.

GSENSE2020BSI	GSENSE6504BSI	GSENSE4040	GSENSE4040BSI
GSENSE6060	GSENSE6060BSI	GSENSE3243BSI	GSENSE6510BSI
GSENSE1517BSI	GSENSE1081BSI	GSENSE400BSI	

### Product Family Features

- Large Format
- High Dynamic
- BSI
- Low Noise

### Applications


- Life Sciences
- Microscopy
- Spectroscopy
- Astronomy
- X-Ray





# GSENSE400BSI

## 4MP SCIENTIFIC BSI CMOS IMAGE SENSOR

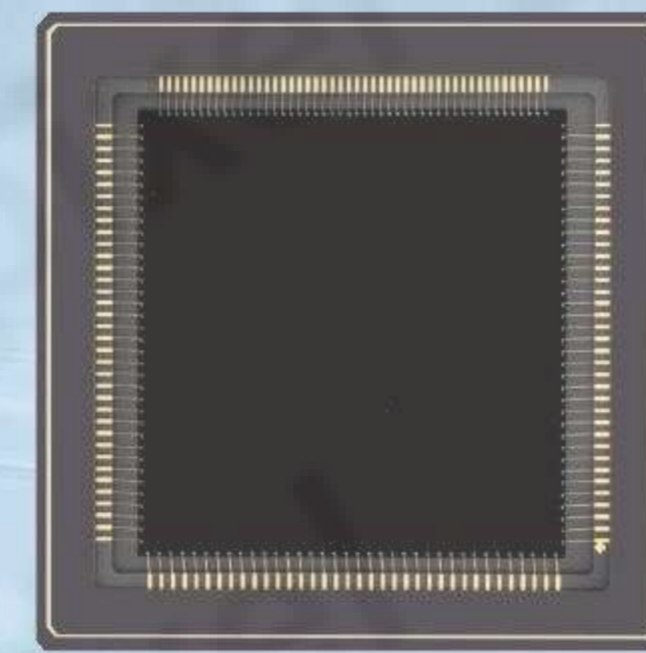

The GSENSE400BSI sensor is a 4 Megapixels resolution BSI CMOS image sensor with 11 μm pixel size. As the first backside illuminated scientific CMOS image sensor in the world, GSENSE400BSI features low readout noise of 1.6 e<sup>-</sup>, high dynamic range of 94 dB, and low dark current of 0.27 e<sup>-</sup>/s/pix at deep cooling of -40°C. With special ARC, the sensor provides peak of 95% (570 nm). This image sensor has two operation modes, STD mode in 48 fps or HDR mode which is optimized for high dynamic range (HDR) applications with half frame rate. In HDR mode, the sensor achieves a linear dynamic range of 95 dB. These features make GSENSE400BSI ideal for high-end scientific imaging, corona detection, astronomy, spectroscopic, and forensic imaging applications.

### Key Features and Benefits


- Backside Illumination Scientific CMOS
- Peak QE of 95%
- Low Noise, Low Power for Long Exposure Modes

### Application

- Spectroscopy
- Life Sciences
- Astronomy
- Microscopy
- X-Ray


Specifications			
Nr of Active Pixels	2048(H) x 2048(V)	Optical Format	2.0"
Pixel Size	11 μm x 11 μm	Photosensitive Area	22.52 mm x 22.52 mm
Shutter Type	Rolling Shutter	Peak QE	95% (570 nm)
Full Well Capacity	91 ke <sup>-</sup>	Temporal Noise	1.6 e <sup>-</sup>
Dark Current	0.27 e <sup>-</sup> /pixel/s (-40°C)	Dynamic Range	95 dB (HDR)
Max Frame Rate	48 fps (STD)	Output Format	8 ch LVDS
Max. Data Rate	2.4 Gbps	ADC	12 bit
Chroma	Mono	Power Consumption	<650 mW
Supply Voltage	3.3 V (analog), 1.8 V (digital)	Package	115 pins PGA (36.5 mm x 36.5 mm)

### Package Drawing

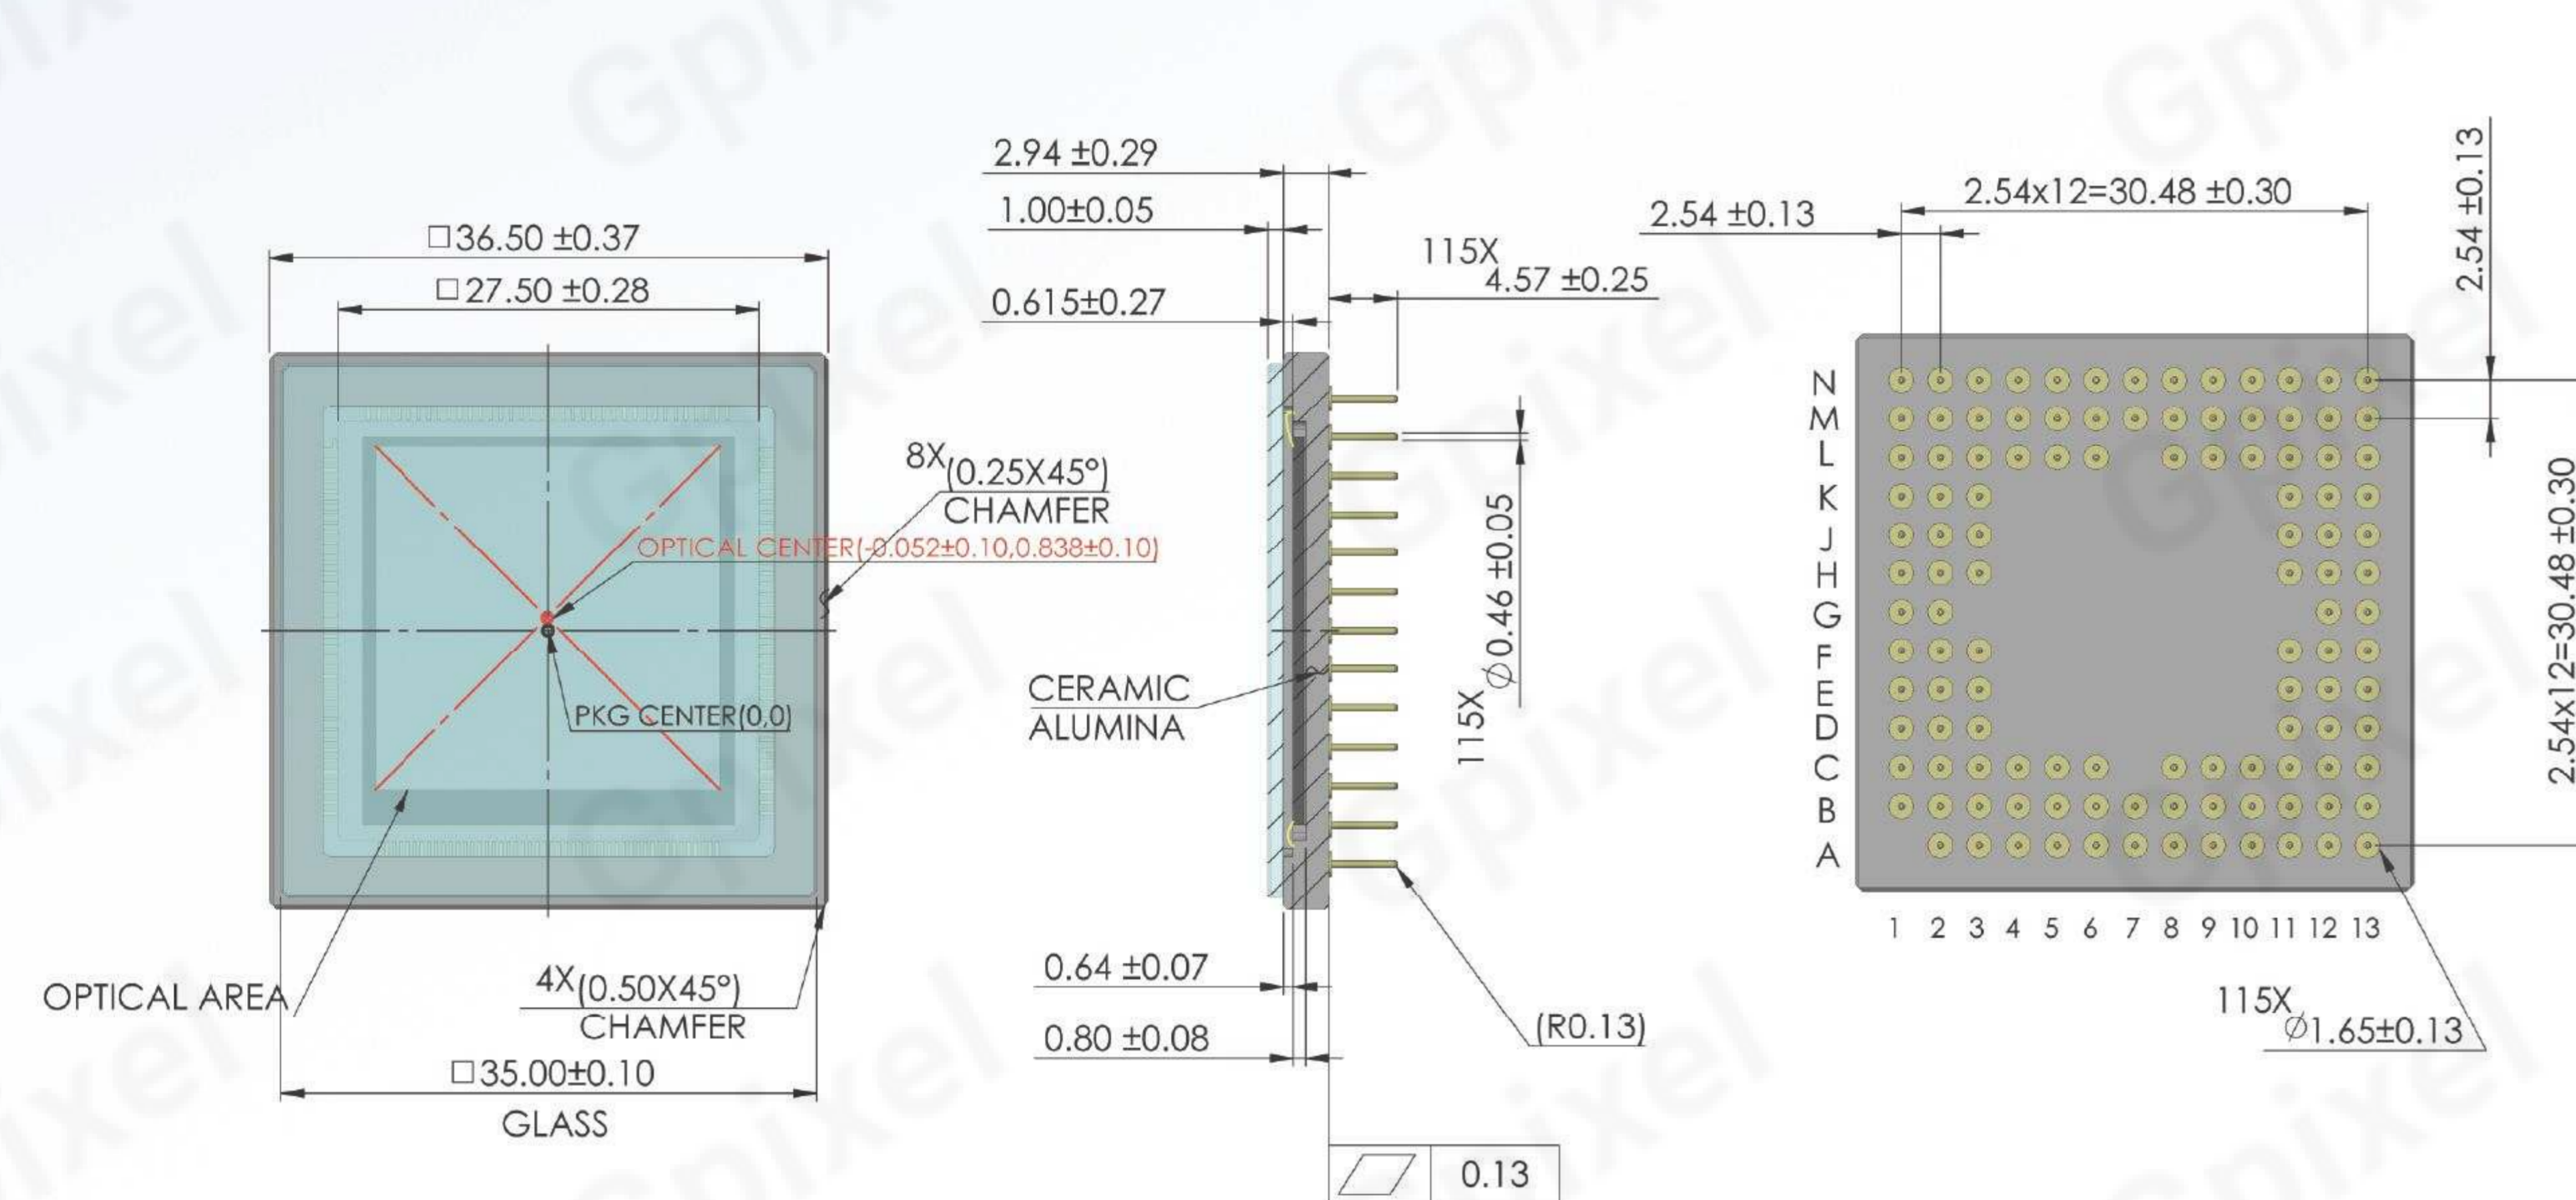

# GSENSE4040BSI

## 16.8MP SCIENTIFIC BSI CMOS IMAGE SENSOR

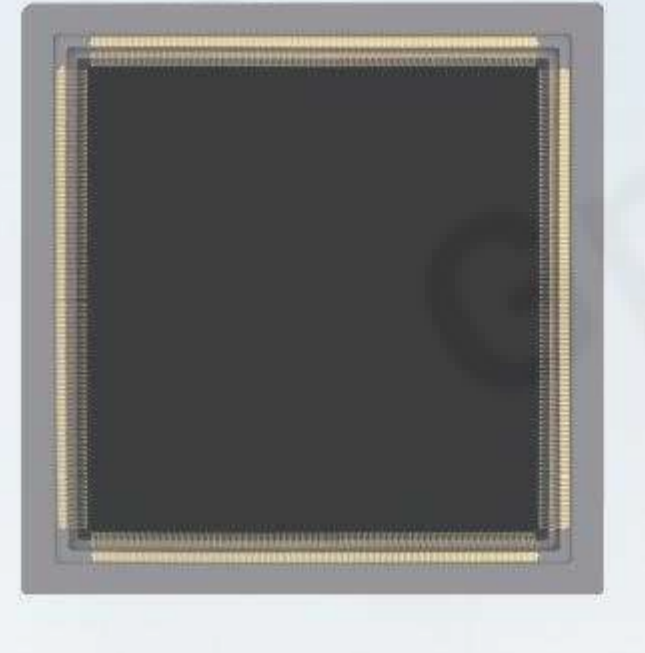

The GSENSE4040BSI sensor is a 4 Megapixels resolution BSI CMOS image sensor with 11 μm pixel size. As the first backside illuminated scientific CMOS image sensor in the world, GSENSE4040BSI features low readout noise of 1.6 e<sup>-</sup>, high dynamic range of 94 dB, and low dark current of 0.27 e<sup>-</sup>/s/pix at deep cooling of -40 °C. With special ARC, the sensor provides peak of 95% (570 nm). This image sensor has two operation modes, STD mode in 48 fps or HDR mode which is optimized for high dynamic range (HDR) applications with half frame rate. In HDR mode, the sensor achieves a linear dynamic range of 95 dB. These features make GSENSE4040BSI ideal for high-end scientific imaging, corona detection, astronomy, spectroscopic, and forensic imaging applications.

### Key Features and Benefits


- Large Format BSI Scientific CMOS
- Low Readout Noise

### Application

- Spectroscopy
- Life Sciences
- Astronomy
- Microscopy
- X-Ray

Specifications			
Nr of Active Pixels	4096(H) x 4096(V)	Optical Format	3.3"
Pixel Size	9 μm x 9 μm	Photosensitive Area	36.864 mm x 36.864 mm
Shutter Type	Rolling Shutter	Peak QE	90% (600 nm)
Full Well Capacity	39.2 ke <sup>-</sup>	Temporal Noise	2.3 e <sup>-</sup>
Dark Current	0.04 e <sup>-</sup> /pixel/s (-40°C)	Dynamic Range	84.6 dB
Max Frame Rate	24 fps	Output Format	18 ch LVDS
Max. Data Rate	10.8 Gbps	ADC	12 bit
Chroma	Mono	Power Consumption	<1.4 W
Supply Voltage	3.3 V (analog), 1.8 V (digital)	Package	140 pins PGA (51.5 mm x 53 mm)


### Package Drawing

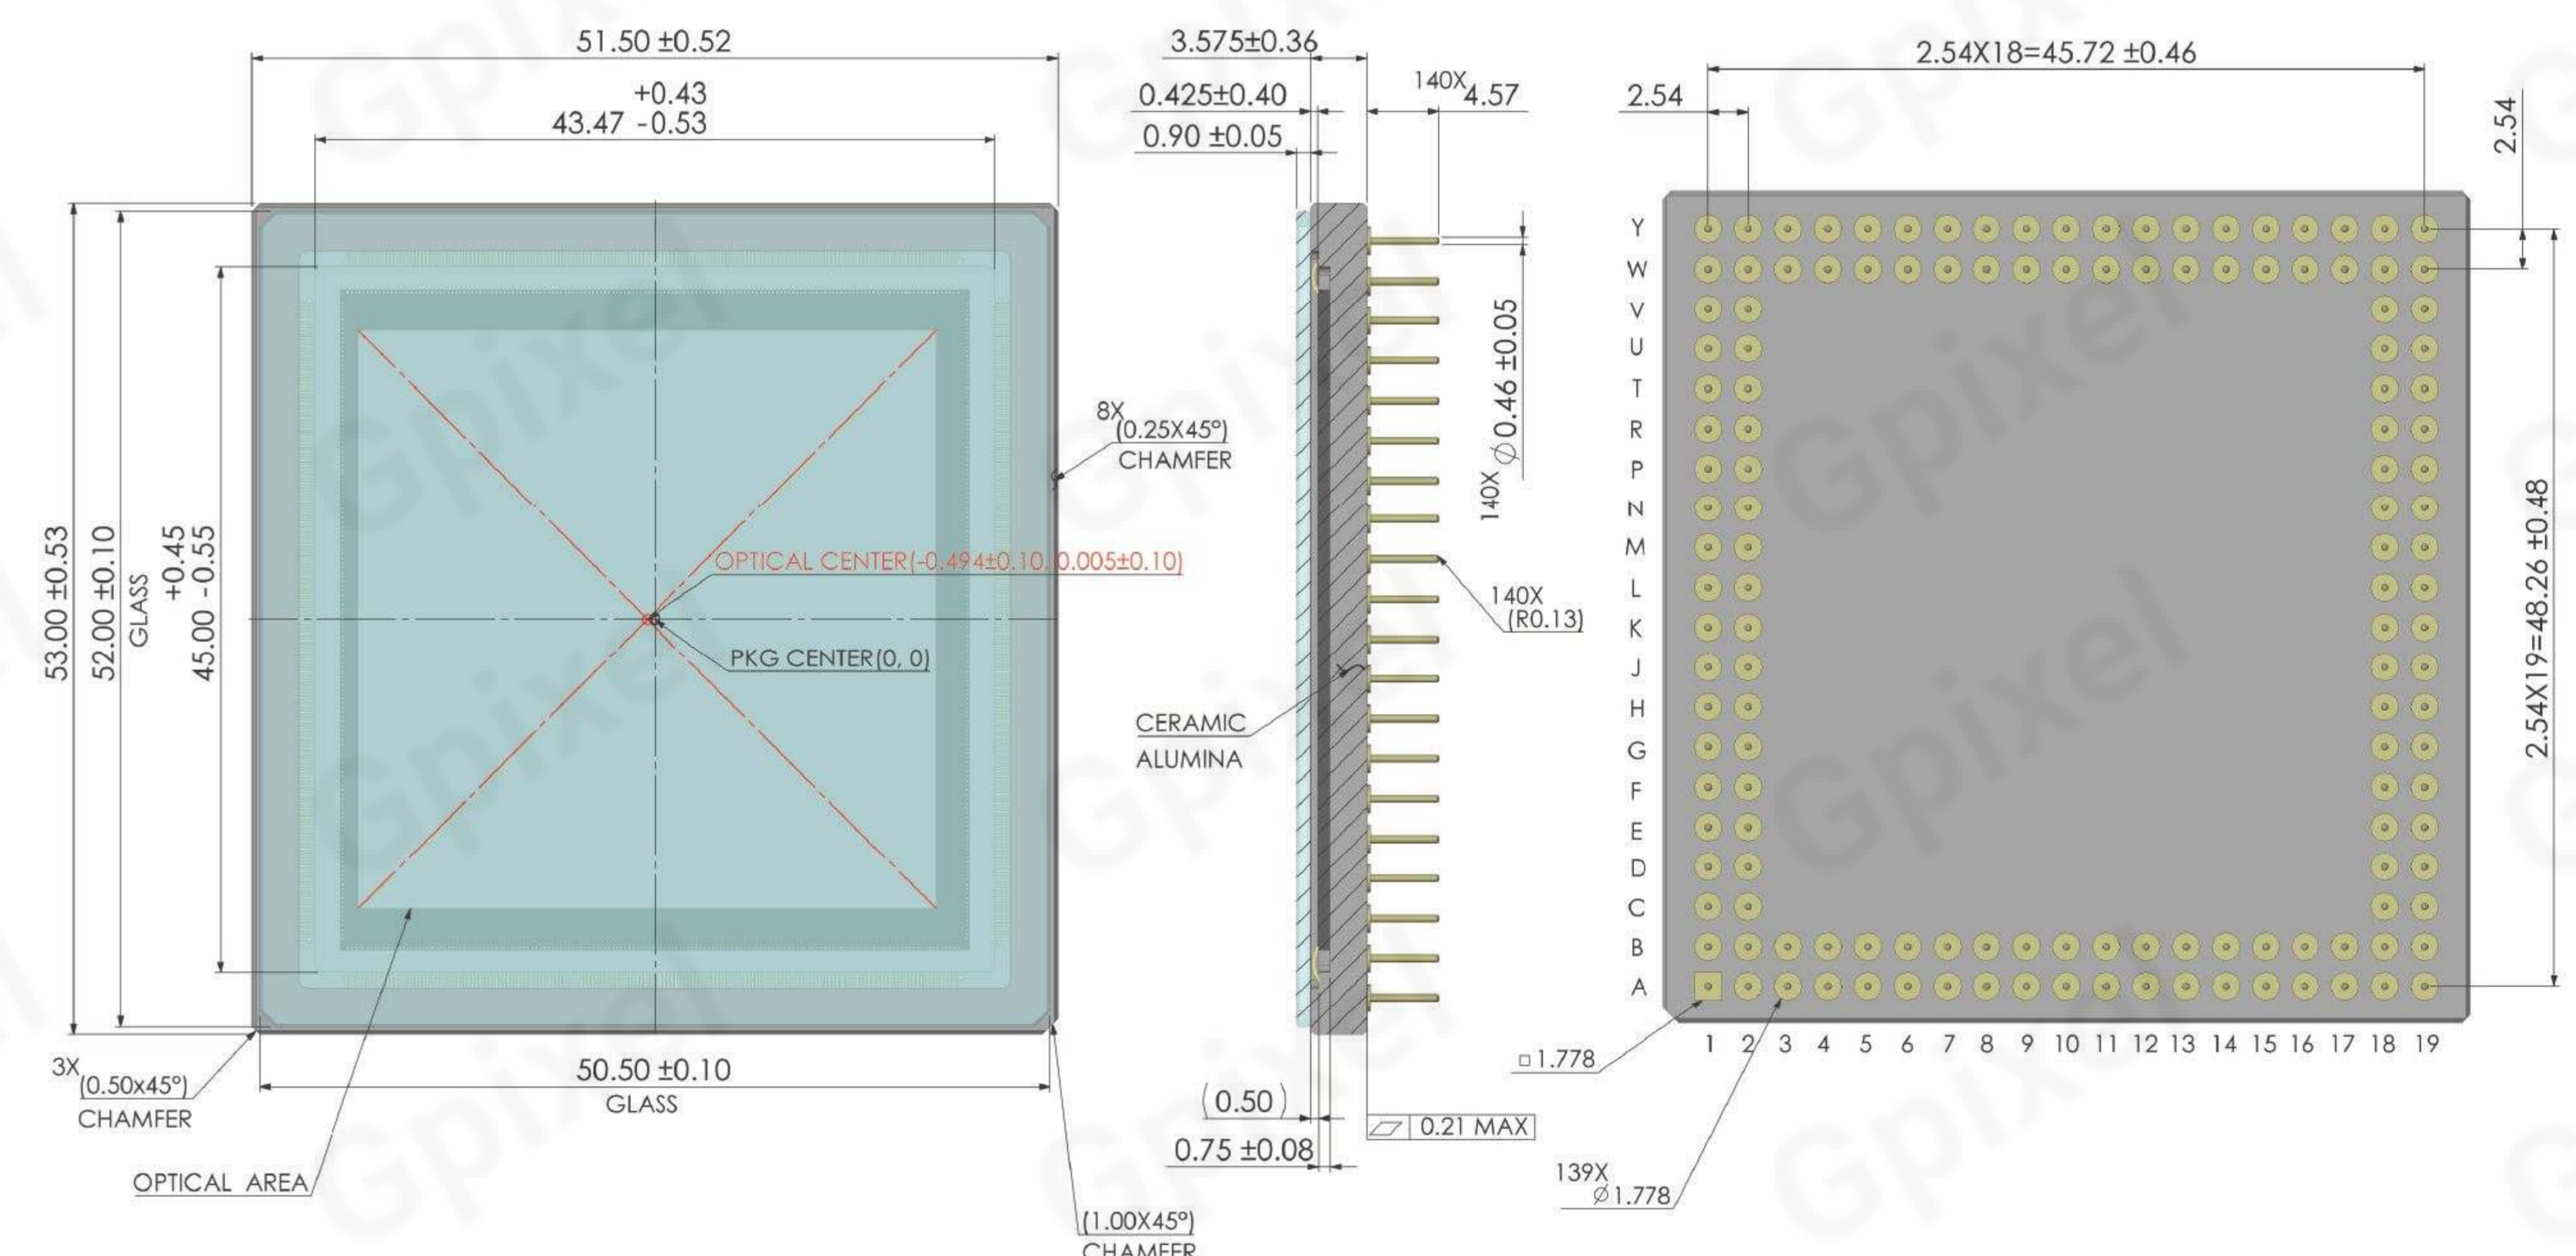



# GSENSE3243BSI

## 43MP SCIENTIFIC CMOS IMAGE SENSOR

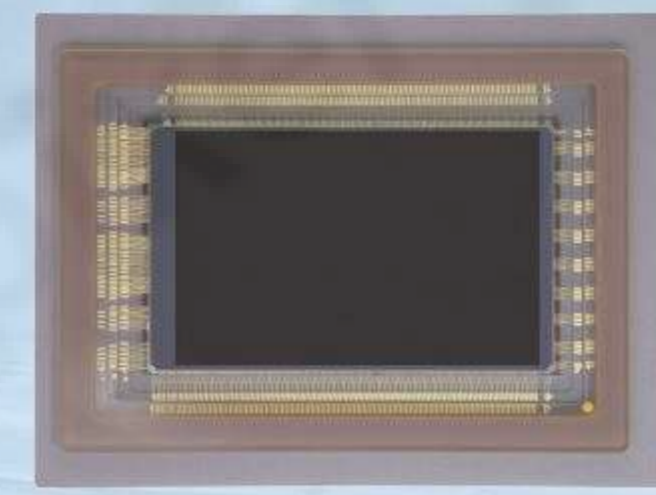

**GSENSE3243BSI** is a APS-C stacked BSI image sensor designed with 3.2 μm pixels. The full resolution of the sensor can be read out at a bit depth of 14 bit and a maximum frame rate of 100 fps using an on-chip high speed serial interface or at 50 fps over 32 Sub LVDS channels operating at 1.05 Gbps/channel. The image sensor has a peak quantum efficiency over 80%, a wide angle response of 37°, read noise of 2.0 e<sup>-</sup> at full speed, and a dark current less than 1 e<sup>-</sup>/pixel/second at 0 degree.

The sensor incorporates multiple features to enhance dynamic range including the dual-gain output, on-chip compression HDR function and digitally programmable piecewise linear HDR feature. The sensor achieves a dynamic range of 77.2 dB in dual gain mode and up to 83 dB using the more advanced HDR features.

### Key Features and Benefits


- Stacked BSI
- High Sensitivity
- Low Noise
- High Dynamic Range
- Multi-Slope HDR
- Dual Gain HDR

### Application

- Spectroscopy
- Life Sciences
- Astronomy
- Microscopy

Specifications			
Nr of Active Pixels	8192 (H) x 5232(V)	Optical Format	1.2"
Pixel Size	3.2 μm x 3.2 μm	Photosensitive Area	26.2 mm x 16.7 mm
Shutter Type	Rolling Shutter	Peak QE	80% (550 nm,Mono)
Full Well Capacity	85 ke <sup>-</sup> (HDR multi-exp)	Temporal Noise	2.0 e <sup>-</sup> (Standard HG), 2.7 e <sup>-</sup> (HDR)
Dark Current	7.8 e <sup>-</sup> /pixel/s (40°C)	Dynamic Range	83 dB (HDR multi-exp)
Max Frame Rate	100 fps	Output Format	32 pairs sLVDS / 16 pairs GSI
Max. Data Rate	84 Gbps	ADC	14 bit
Chroma	Mono	Power Consumption	4 W
Supply Voltage	3.3 V, 1.8 V, 1.25 V, 2.2 V, 4.5 V	Package	455 pins LGA (48.0 mm x 35.5 mm)

### Package Drawing

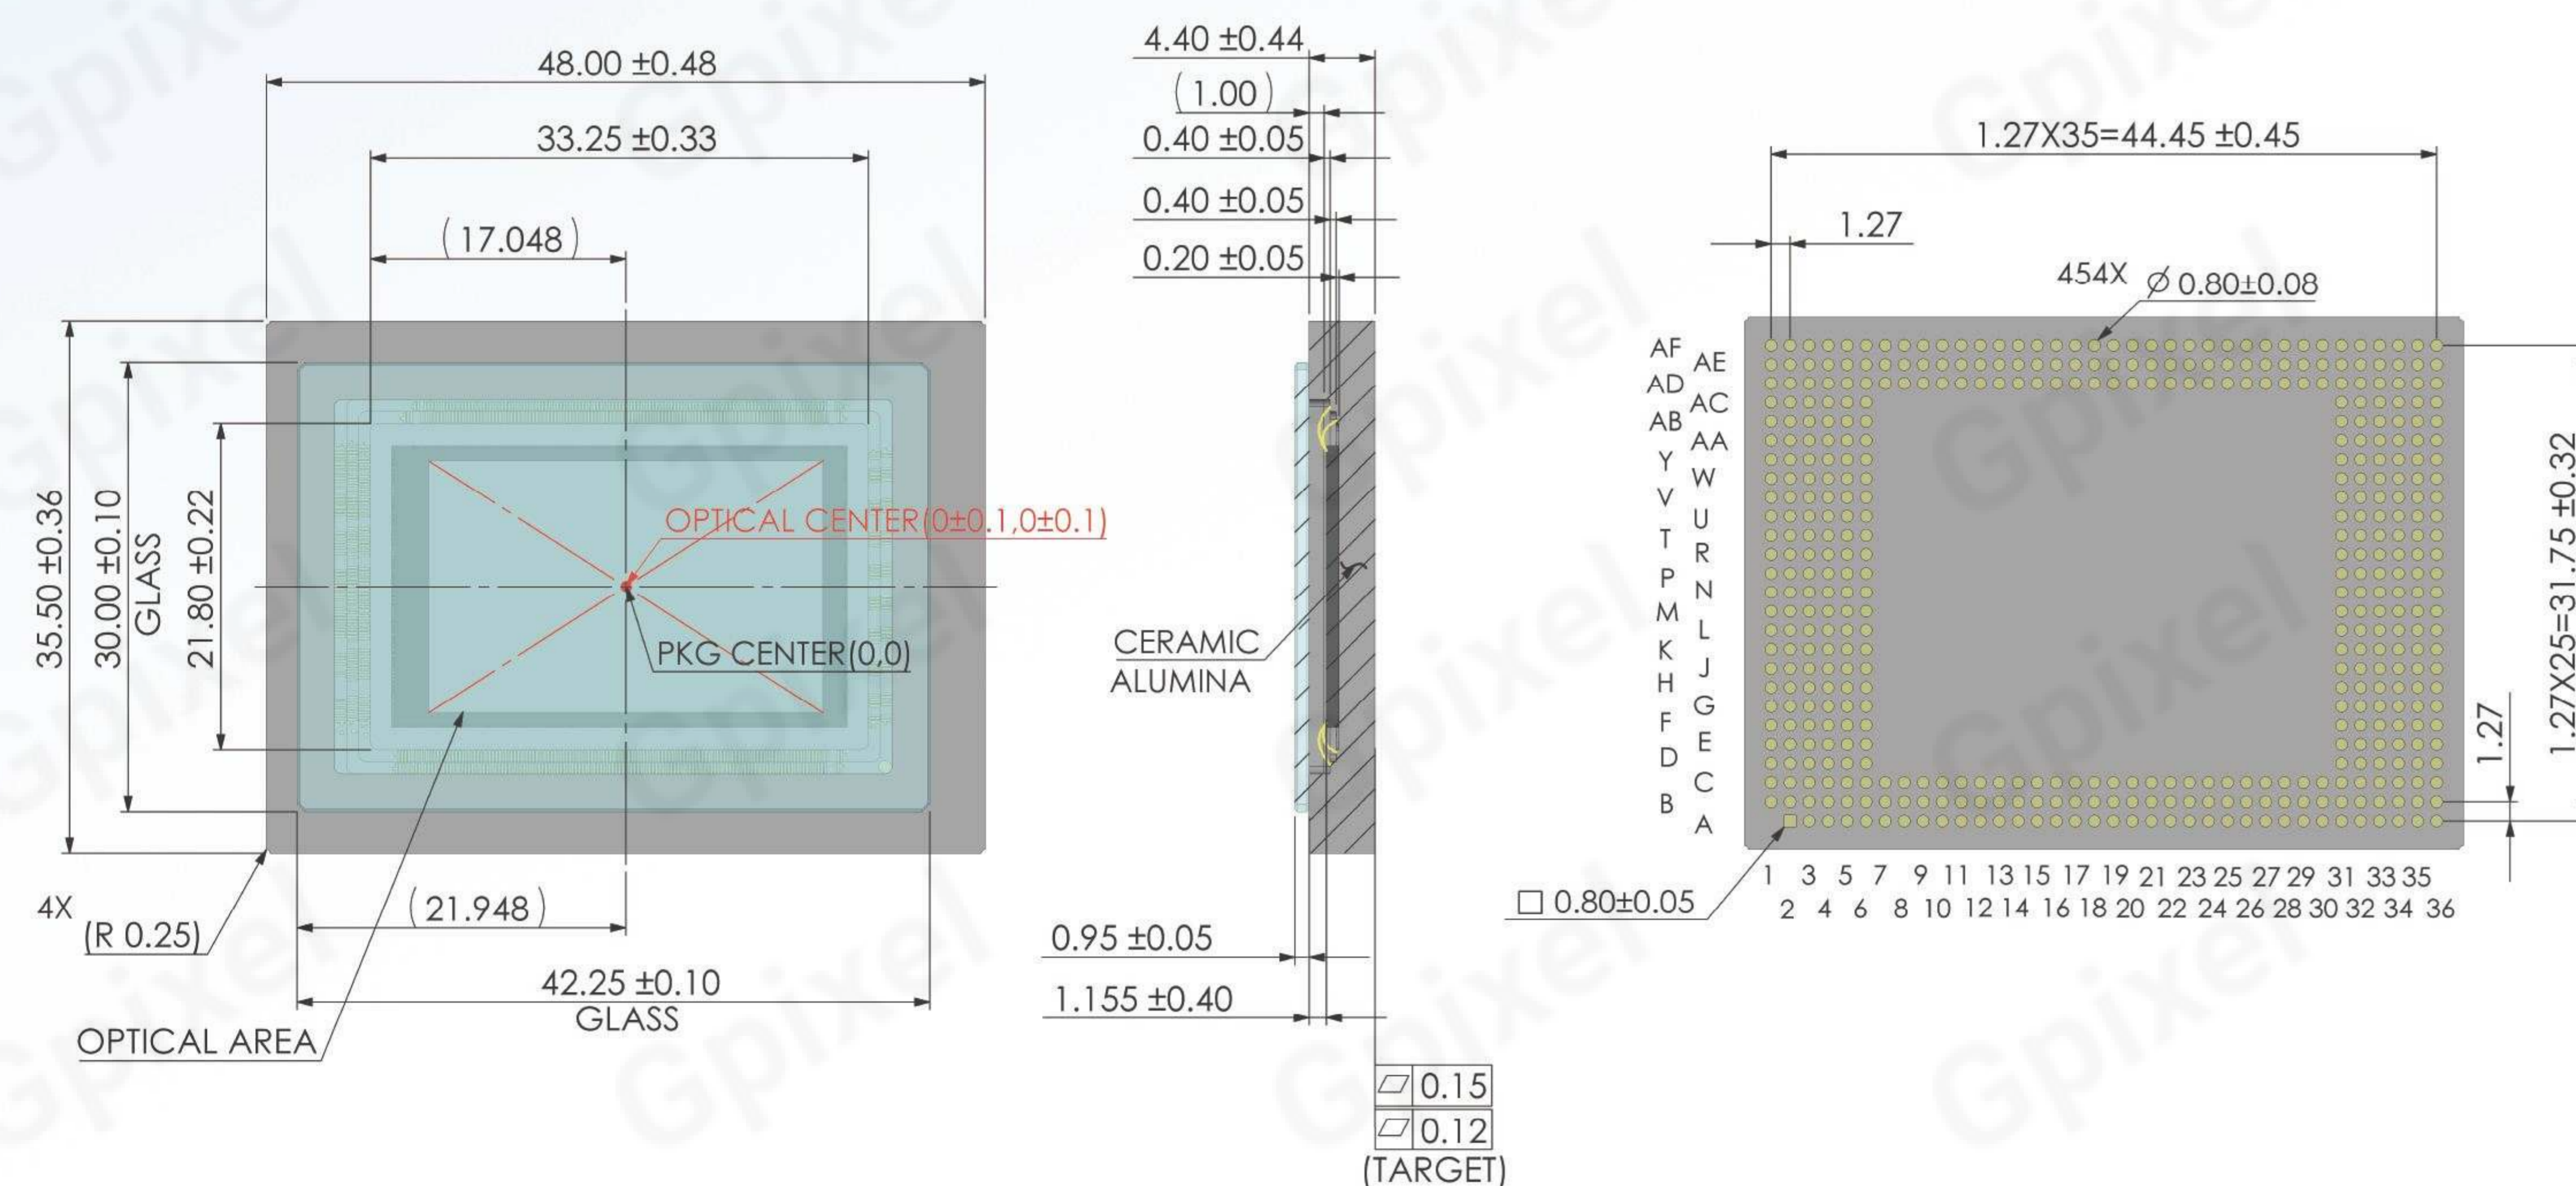

# GSENSE6510BSI

## 10.2MP SCIENTIFIC CMOS IMAGE SENSOR



**GSENSE6510BSI** is a 3200 x 3200 (10.2 MP) resolution image sensor with industry-standard 6.5 μm x 6.5 μm pixel and large 29.4 mm diagonal for increased throughput in microscopy applications compared to 19 mm sCMOS devices. With a peak QE of 95% and read noise of 0.7 e<sup>-</sup> median, the sensor achieves exceptional signal-to-noise in extreme low light applications.

The sensor offers five imaging modes. In 12 bit mode, the sensor delivers 62.3 dB of dynamic range with a read noise floor or 1.3 e<sup>-</sup> (88 fps). In 11 bit HDR mode, the sensor uses dual-gain readout to achieve 78.8 dB of dynamic range with a read noise of 1.8 e<sup>-</sup> at the same 83 fps. Additionally, the sensor offers two high-speed modes, an 8 bit mode reaching 500 fps and an 11 bit mode reaching 166 fps. A 12 bit low noise mode achieves 0.7 e<sup>-</sup> read noise.

### Key features and Benefits


- BSI
- High Sensitivity
- Low Noise
- Dual Gain HDR
- High Frame Rate

### Application

- Life Sciences
- Microscopy

Specifications			
Nr of Active Pixels	3200 (H) x 3200 (V)	Optical Format	1.9"
Pixel Size	6.5 μm x 6.5 μm	Photosensitive Area	20.8 mm x 20.8 mm
Shutter Type	Rolling Shutter	Peak QE	95% (610 nm)
Full Well Capacity	21 ke <sup>-</sup>	Temporal Noise	0.7 e <sup>-</sup> (12 bit, 16 x CMS)
Dark Current	0.2 e <sup>-</sup> /pixel/s (-10°C)	Dynamic Range	78.8 dB (11 bit HDR)
Max Frame Rate	500 fps (8 bit)	Output Format	72 ch LVDS
Max. Data Rate	69.12 Gbps (8 bit)	ADC	8/11/12 bit
Chroma	Mono	Power Consumption	<5 W (8 bit), <2.7 W (12 bit)
Supply Voltage	3.6 V (analog), 2.0 V (digital)	Package	284 pins LGA (44.4 mm x 34.2 mm)

### Package Drawing

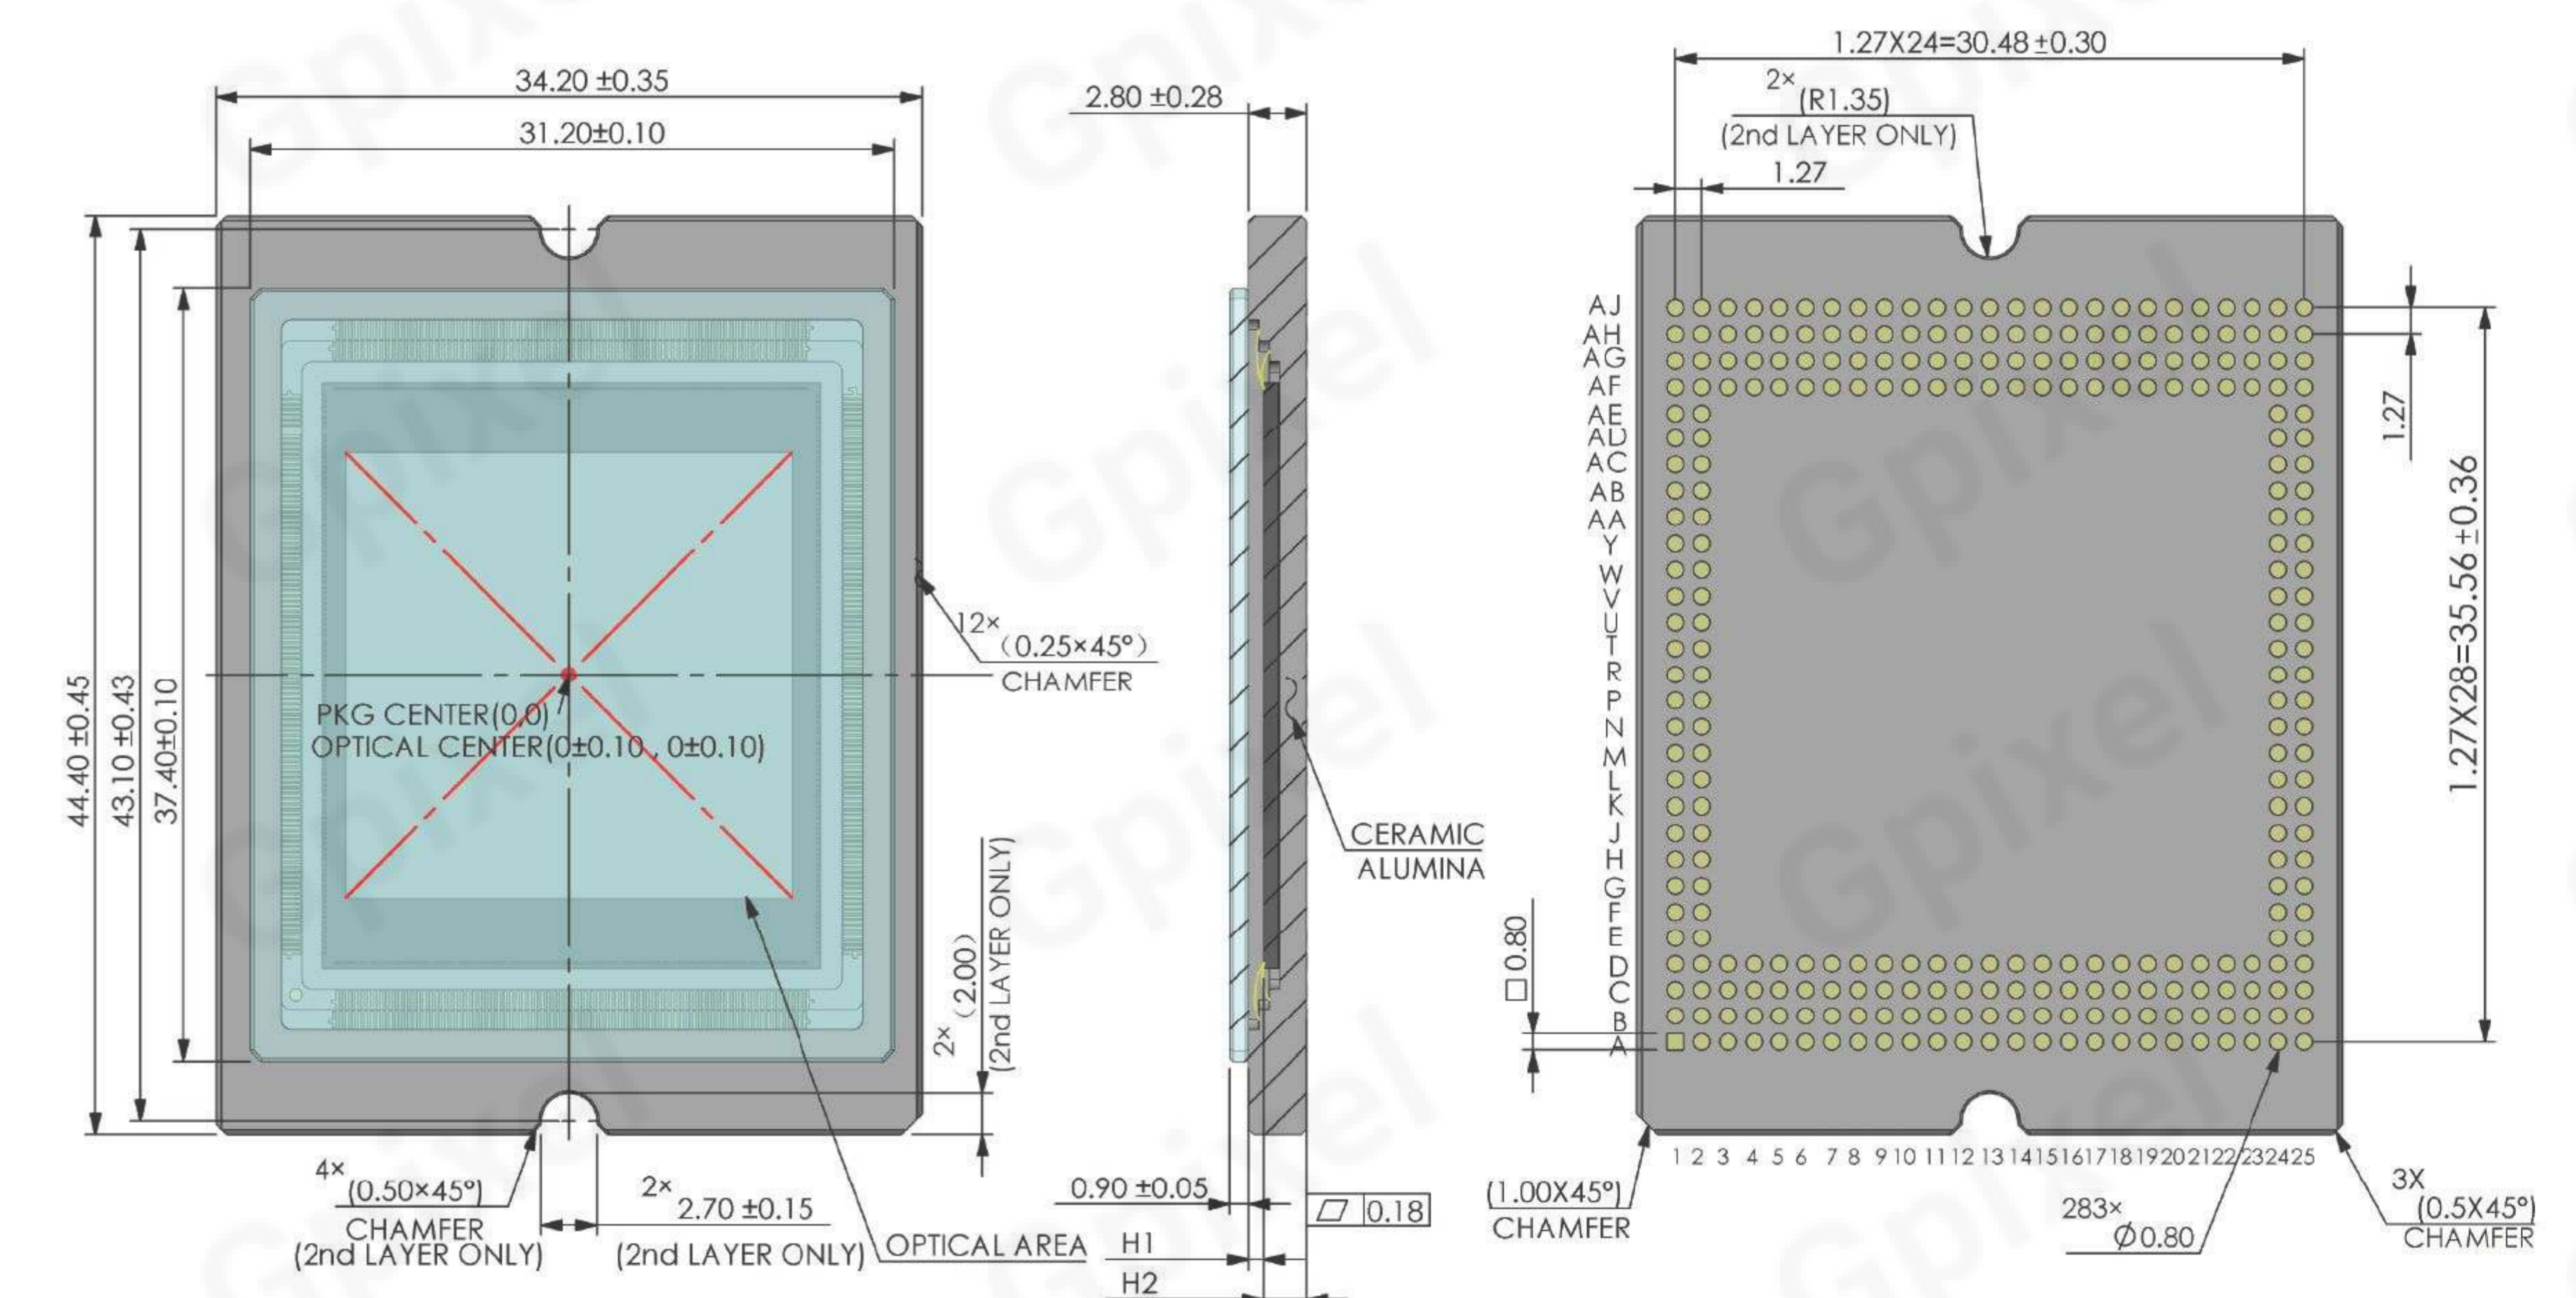

# GSENSE1517BSI

## 16.8MP 15 μm SCIENTIFIC CMOS IMAGE SENSOR



**GSENSE1517BSI** is a 4116 x 4100 (16.8 MP) resolution scientific image sensor with high-performance 15 μm x 15 μm pixels, a large 61.74 mm x 61.50 mm imaging area, peak QE of 92% and minimum read noise 1.2 e<sup>-</sup>. The sensor utilizes 12 bit dual-gain HDR, and both 12 bit and 14 bit single gain and 16 bit single gain ADCs to achieve a variety of imaging modes. Both 12 bit HDR and 14 bit STD are supported at up to 4 fps utilizing 10 pairs of LVDS working at 420 Mbps each. For 16 bit STD mode, only 3 pairs of LVDS is utilized. In 12 bit dual-gain HDR mode, an intra-scene dynamic range over 95.3 dB is achieved with 70 ke<sup>-</sup> full well capacity and 1.2 e<sup>-</sup> readout noise. In 14 bit STD mode, either the LG or HG signal can be utilized. Using the HG signal, read noise is 1.5 e<sup>-</sup> and a dynamic range of 79.6 dB is achieved. Using the LG signal, the maximum full well capacity of 70 ke<sup>-</sup>. In 16 bit STD mode, with the maximum full well capacity of 70 ke<sup>-</sup> and the readout noise of 5.8 e<sup>-</sup>, it can achieve a dynamic range of 81.5 dB.

**GSENSE1517BSI** is assembled in a high-end SiC package designed such that the dead space at 3x package sides is minimized for mosaic tiling.

The thermal expansion of SiC is close to that of the silicon die, providing mechanical stability over the sensor's full operating range. The sensor's 144 pins Al<sub>2</sub>O<sub>3</sub> IPGA ceramic package is offered with removable cover glass for easy assembly into cooled camera systems.

### Key Features and Benefits


- 92% Peak QE (450 nm)
- On-chip 16 bit Column-Parallel ADC
- 3-Side Buttable with SiC Package
- Low Noise with 1.2 e<sup>-</sup>
- Low Dark Current: < 0.008 e<sup>-</sup>/s/pix (-70 °C)
- 61 mm SQ. Large Format Sensor with Frame Rate up to 4 fps
- Anti-Glowing

### Application

- Astronomy

Specifications			
<b>Nr of Active Pixels</b>	4116 (H) x 4100 (V)	<b>Photosensitive Area</b>	61.74 mm x 61.50 mm
<b>Pixel Size</b>	15 μm x 15 μm	<b>Dark Current</b>	< 0.008 e <sup>-</sup> /pixel/s (-70°C)
<b>Shutter Type</b>	Rolling Shutter	<b>Peak QE</b>	92% (450 nm)
<b>Dynamic Range</b>	95.3 dB (12 bit, HDR), 76.1 dB (14 bit, LG) 79.6 dB (14 bit, HG), 81.5 dB (16 bit, LG)	<b>Temporal Noise</b>	1.2 e <sup>-</sup> (12 bit, HDR), 10.9 e <sup>-</sup> (14 bit, LG) 1.5 e <sup>-</sup> (14 bit, HG), 5.8 e <sup>-</sup> (16 bit LG)
<b>Full Well Capacity</b>	70 ke <sup>-</sup> (12 bit HDR, 14 bit & 16 bit LG), 14.4 ke <sup>-</sup> (14 bit, HG)	<b>ADC</b>	16 bit
<b>Max Frame Rate</b>	4 fps (12 bit, HDR & 14 bit), 1.1 fps (16 bit)	<b>Output Format</b>	10 pairs LVDS
<b>Max. Data Rate</b>	4.2 Gbps	<b>Power Consumption</b>	<1 W
<b>Chroma</b>	Mono	<b>Operation Temperature</b>	-70°C ~ 50°C
<b>Supply Voltage</b>	3.3 V (Analog), 1.55 V (Digital), 1.8 V (IO)	<b>Package</b>	SiC with 144 pins Al <sub>2</sub> O <sub>3</sub> IPGA ceramic package (66.2 mm x 72.545 mm)

### Package Drawing

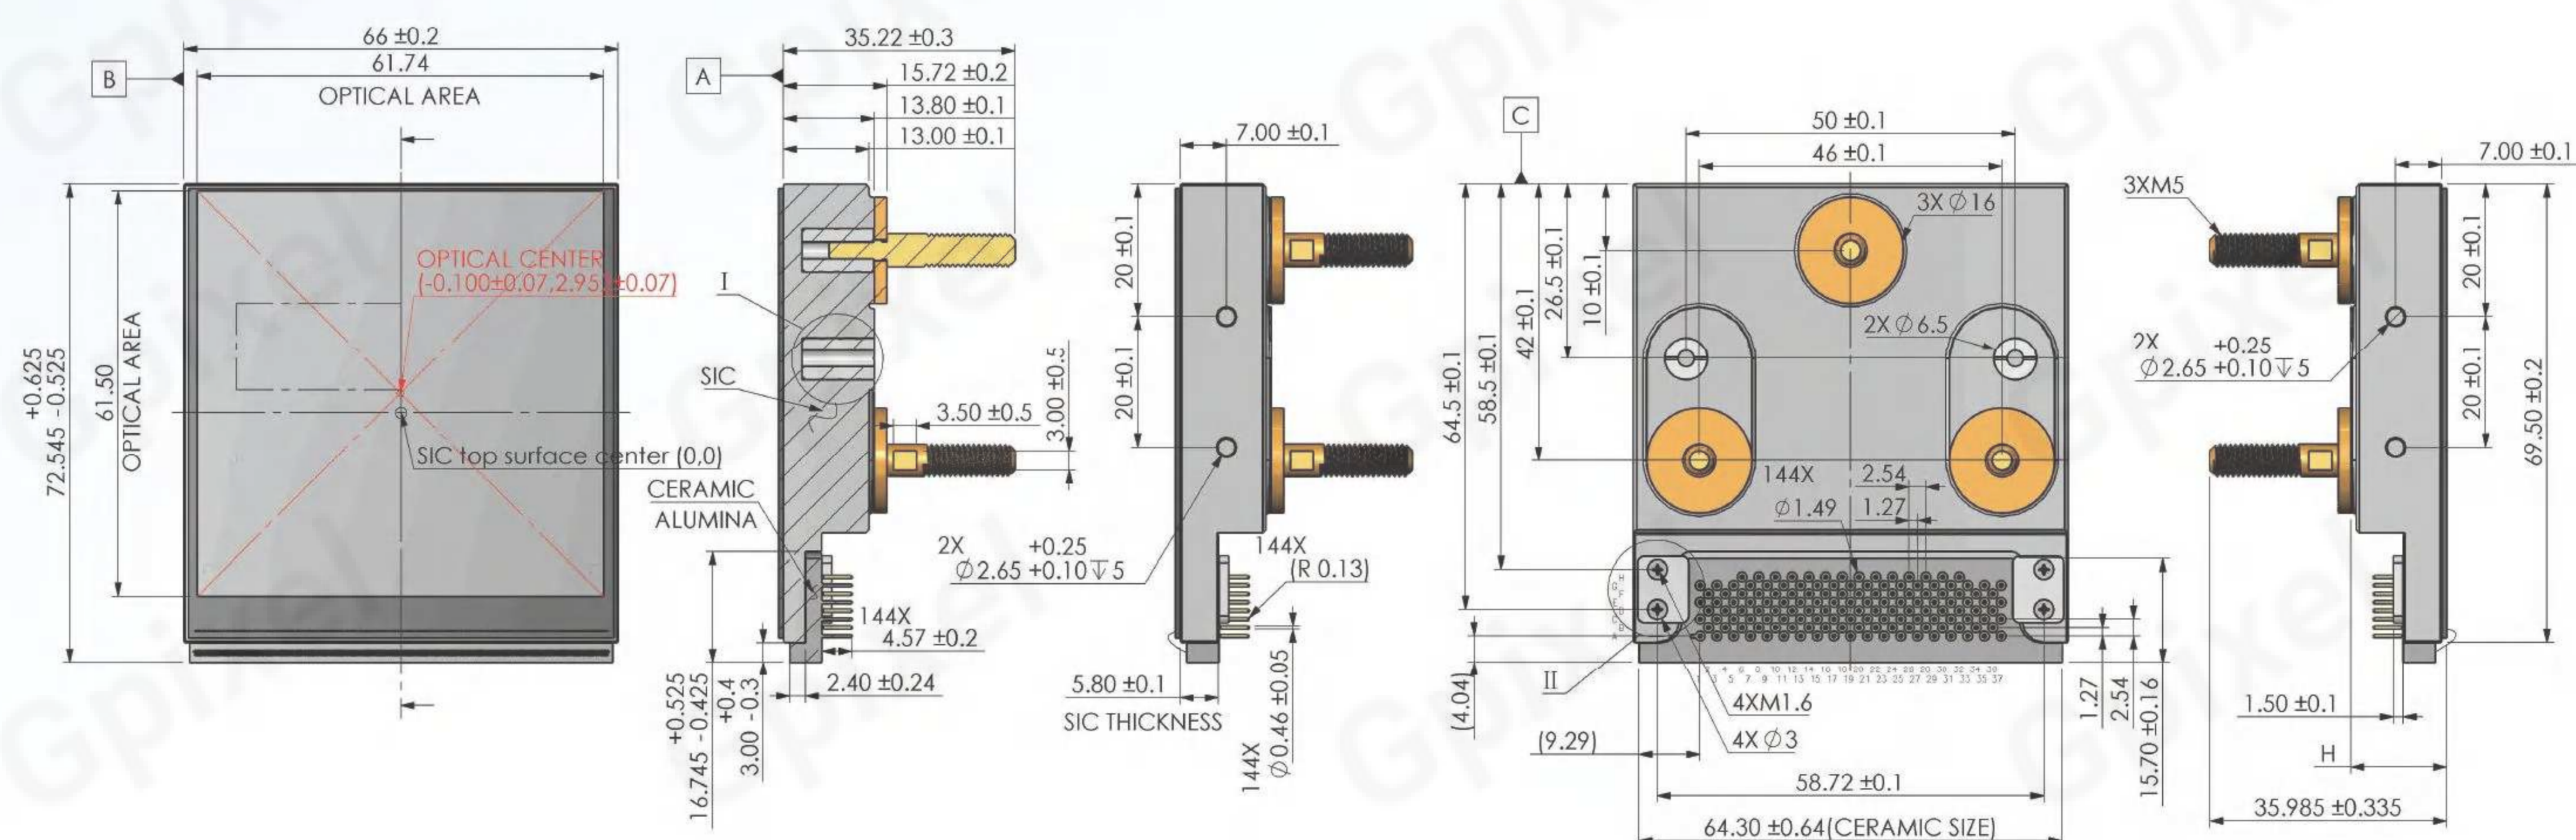

# GSENSE1081BSI

## 81MP SCIENTIFIC BSI CMOS IMAGE SENSOR



**GSENSE1081BSI** is designed with large imaging area for demanding scientific imaging applications. Sensor provides active resolution of 8900(H) x 9120(V) with 10 μm x 10 μm pixel size. An inter-scene dynamic range is 84.5 dB combined from maximum full well capacity of 90.68 ke<sup>-</sup> and readout noise of 5.35 e<sup>-</sup>.

Sensor supports on-chip 16 bit ADC, with LVDS channel running up to 250 MHz, providing frame rate up to 0.34 fps. **GSENSE1081BSI** is assembled in high-end SiC package with one flexi-cable, by this design, the dead space at 3x package sides is minimized and makes sensor well fit for applications require a mosaic sensor array. The thermal expansion of SiC is close to silicon die which is suitable for deep cooling applications.

### Key Features and Benefits


- 97% Peak QE (610 nm)
- On-chip 16 bit Column-Parallel ADC
- Dark Current: 0.00373 e<sup>-</sup>/pixel/s (-70 °C)
- Anti-Glowing
- Silicon Carbide with one Flexi-Cable

### Application

- Astronomy

Specifications			
<b>Nr of Active Pixels</b>	8900(H) x 9120(V)	<b>Optical Format</b>	7.96"
<b>Pixel Size</b>	10 μm x 10 μm	<b>Photosensitive Area</b>	89.00 mm x 91.20 mm
<b>Shutter Type</b>	Rolling Shutter	<b>Peak QE</b>	97.11% (610 nm)
<b>Full Well Capacity</b>	90.68 ke <sup>-</sup>	<b>Temporal Noise</b>	5.35 e <sup>-</sup>
<b>Dark Current</b>	0.00373 e <sup>-</sup> /pixel/s (-70°C)	<b>Dynamic Range</b>	84.5 dB
<b>Max Frame Rate</b>	0.34 fps (16 bit), 0.94 fps (15 bit)	<b>Output Format</b>	5 ch LVDS
<b>Max. Data Rate</b>	500 Mbps (16 bit), 1.6 Gbps (15 bit)	<b>ADC</b>	15/16 bit
<b>Chroma</b>	Mono	<b>Power Consumption</b>	1.4 W
<b>Supply Voltage</b>	5 V (analog), 1.8 V (digital)	<b>Package</b>	100 pins SiC package (92.3 mm x 98.4 mm)

### Package Drawing

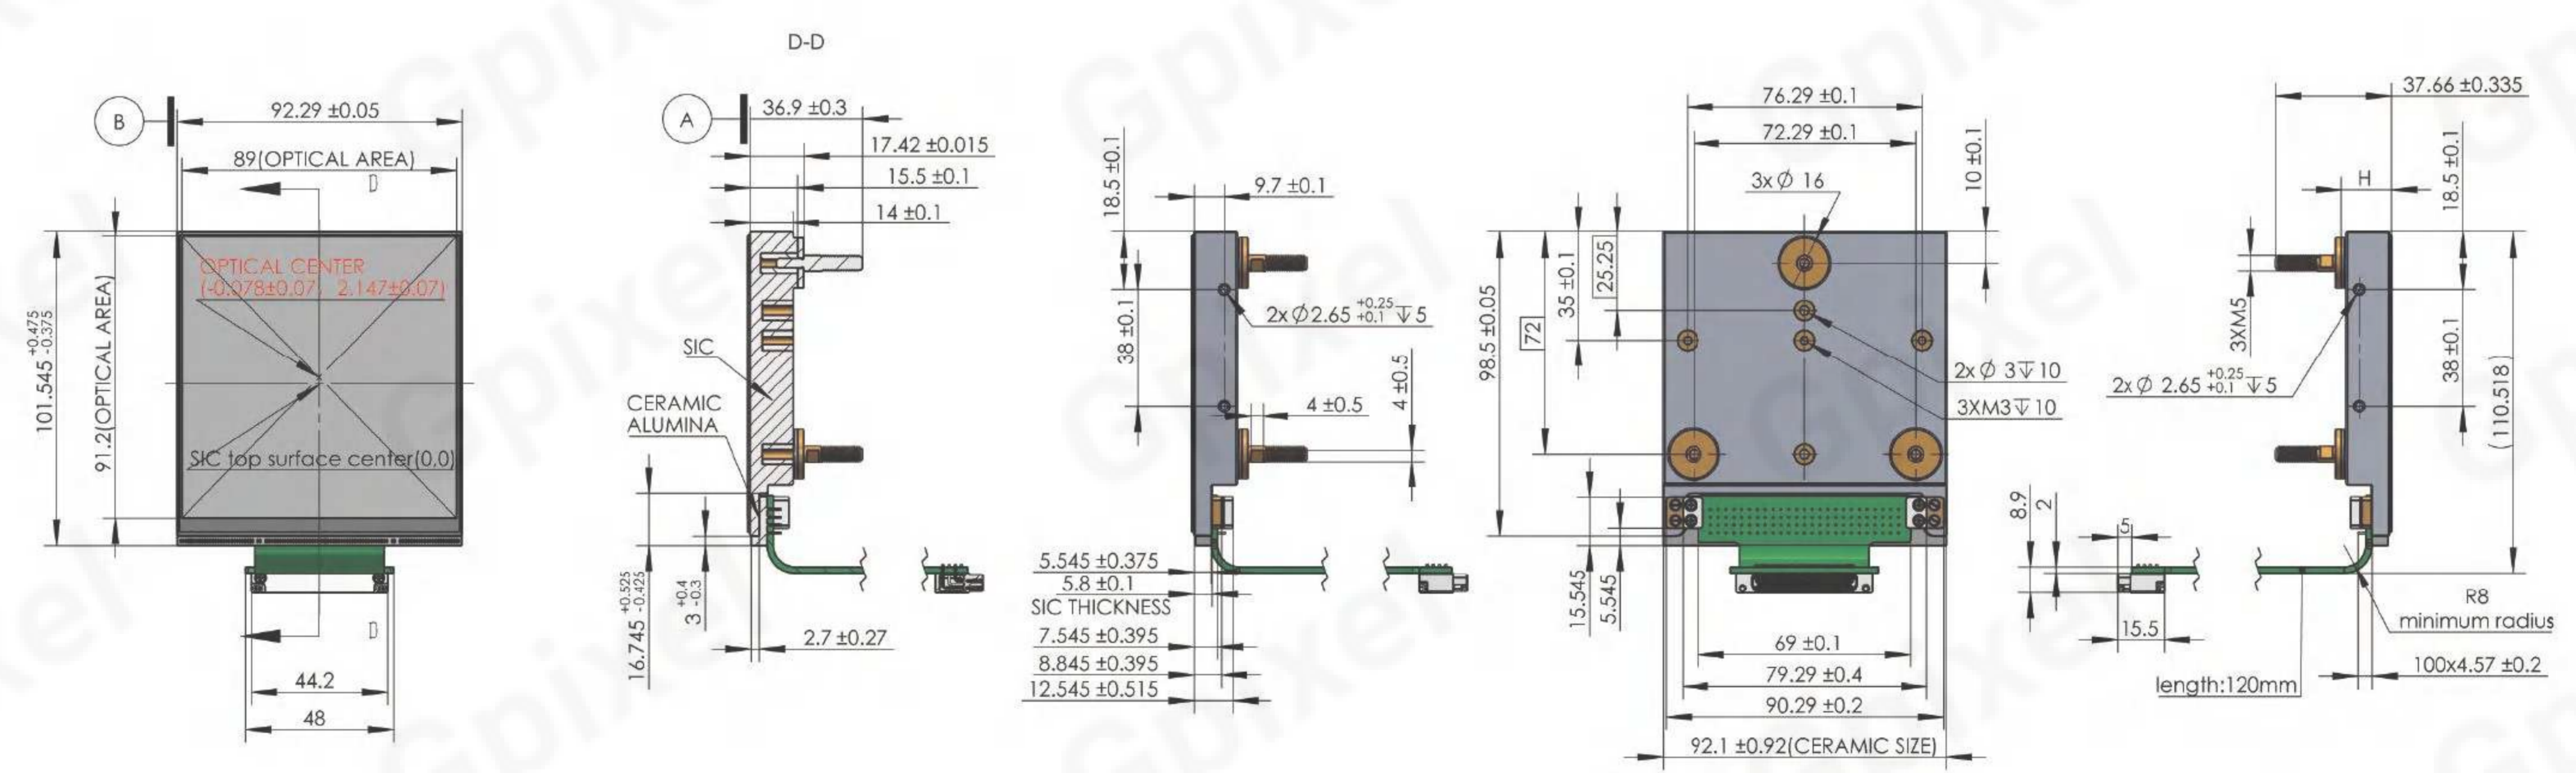

# GSENSE64105BSI

## 105 MP SCIENTIFIC BSI CMOS IMAGE SENSOR



The GSENSE64105BSI is a 104.8-megapixel large-format scientific CMOS image sensor featuring a 6.4 μm pixel pitch and a 65.5 mm × 65.5 mm square photosensitive area, enabling exceptionally wide field capture. Designed for the most demanding scientific applications, GSENSE64105BSI offers ultra-low read noise of 1.25 e<sup>-</sup>, high intra-scene dynamic range of 98.8 dB, and a peak quantum efficiency of 75% (550 nm), providing excellent sensitivity for faint-signal detection. Its dual-gain HDR architecture delivers stable linearity across bright and dim regions, while the sensor's super-high resolution enables enhanced reconstruction of fine spatial. With a dark current of just 6.28 e<sup>-</sup>/s/pix(20°C), 24-lane high-speed LVDS output, and a power-efficient <1.6 W design, GSENSE64105BSI is ideally suited for wide-field astronomy, precision photometry, large-area spectroscopy, and advanced scientific instrumentation that requires both extreme sensitivity and large-format fidelity.

### Key Features and Benefits


- High Resolution of 104.8M with 6.4 μm Rolling Shutter Pixel
- Low noise with 1.25 e<sup>-</sup>
- FWC up to 110 ke<sup>-</sup>
- 75% Peak QE (550 nm)
- Support HDR Mode

### Application

- Life Sciences
- Astronomy

Specifications			
Nr of Active Pixels	10240 (H) × 10240 (V)	Resolution	105 MP
Pixel Size	6.4 μm x 6.4 μm	Photosensitive Area	65.536 mm x 65.536 mm
Shutter Type	Rolling Shutter	Peak QE	75% (550 nm)
Full Well Capacity	110 ke <sup>-</sup> (12 bit HDR, 13 bit LG), 11.5 ke <sup>-</sup> (13 bit HG)	Dark Current	6.28 e <sup>-</sup> /pixel/s (20°C)
Temporal Noise	1.25 e <sup>-</sup> (12 bit HDR), 16 e <sup>-</sup> (13 bit LG), 1.7 e <sup>-</sup> (13 bit HG)	Max Frame Rate	1.25 fps
Dynamic Range	98.8 dB (12 bit HDR), 76.9 dB (13 bit LG), 76.6 dB (13 bit HG)	Output Format	24 pairs of LVDS
Max. Data Rate	6.72 Gbps	ADC	12/13 bit
Chroma	Mono	Power Consumption	<1.6 W
Supply Voltage	3.3 V (analog), 1.5 V (digital), 3.3 V (IO)	Package	327 pins PGA (93.0 mm x 87.0 mm)

### Package Drawing

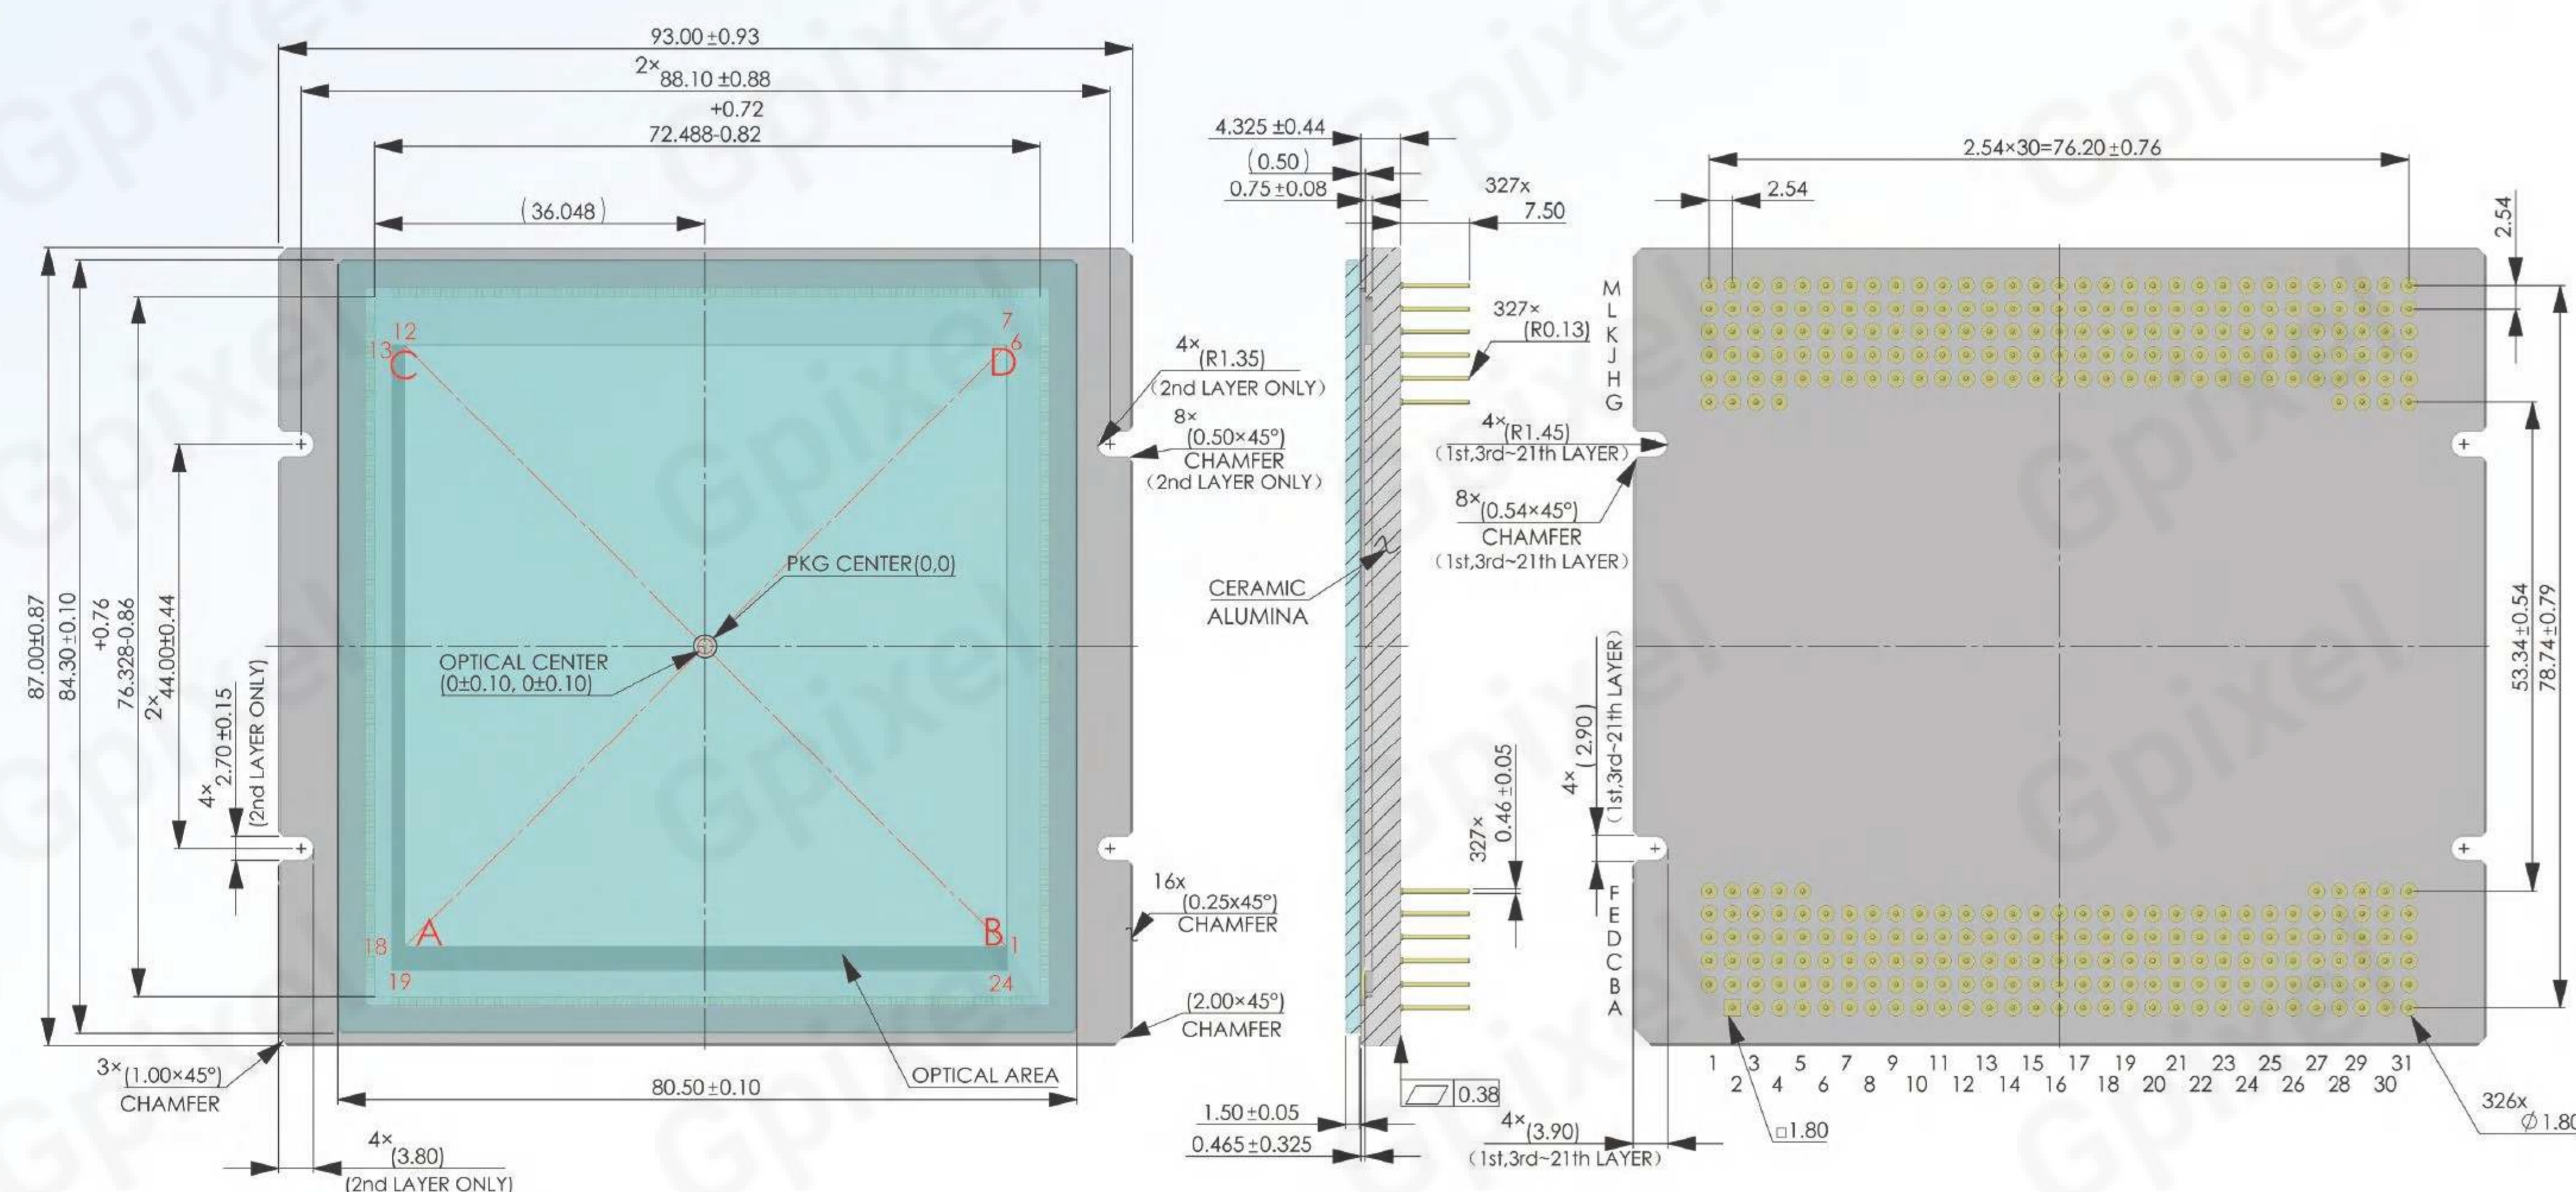

GMAX | GSPRINT | GSENSE | **GLUX** | GTOF | GCINE | GL | GXS | GIR

## Area Scan CMOS Image Sensor

The GLUX series is a backside illuminated, scientific grade CMOS image sensor product family combining sub-electron noise performance with high frame rates for ultra-low light imaging in scientific and surveillance applications.

GLUX9701BSI


GLUX1605BSI

### Product Family Features

- High Sensitivity
- HDR
- Low Noise
- BSI

### Applications

- Scientific imaging
- Low-light Monitoring
- Ultraviolet industrial inspection

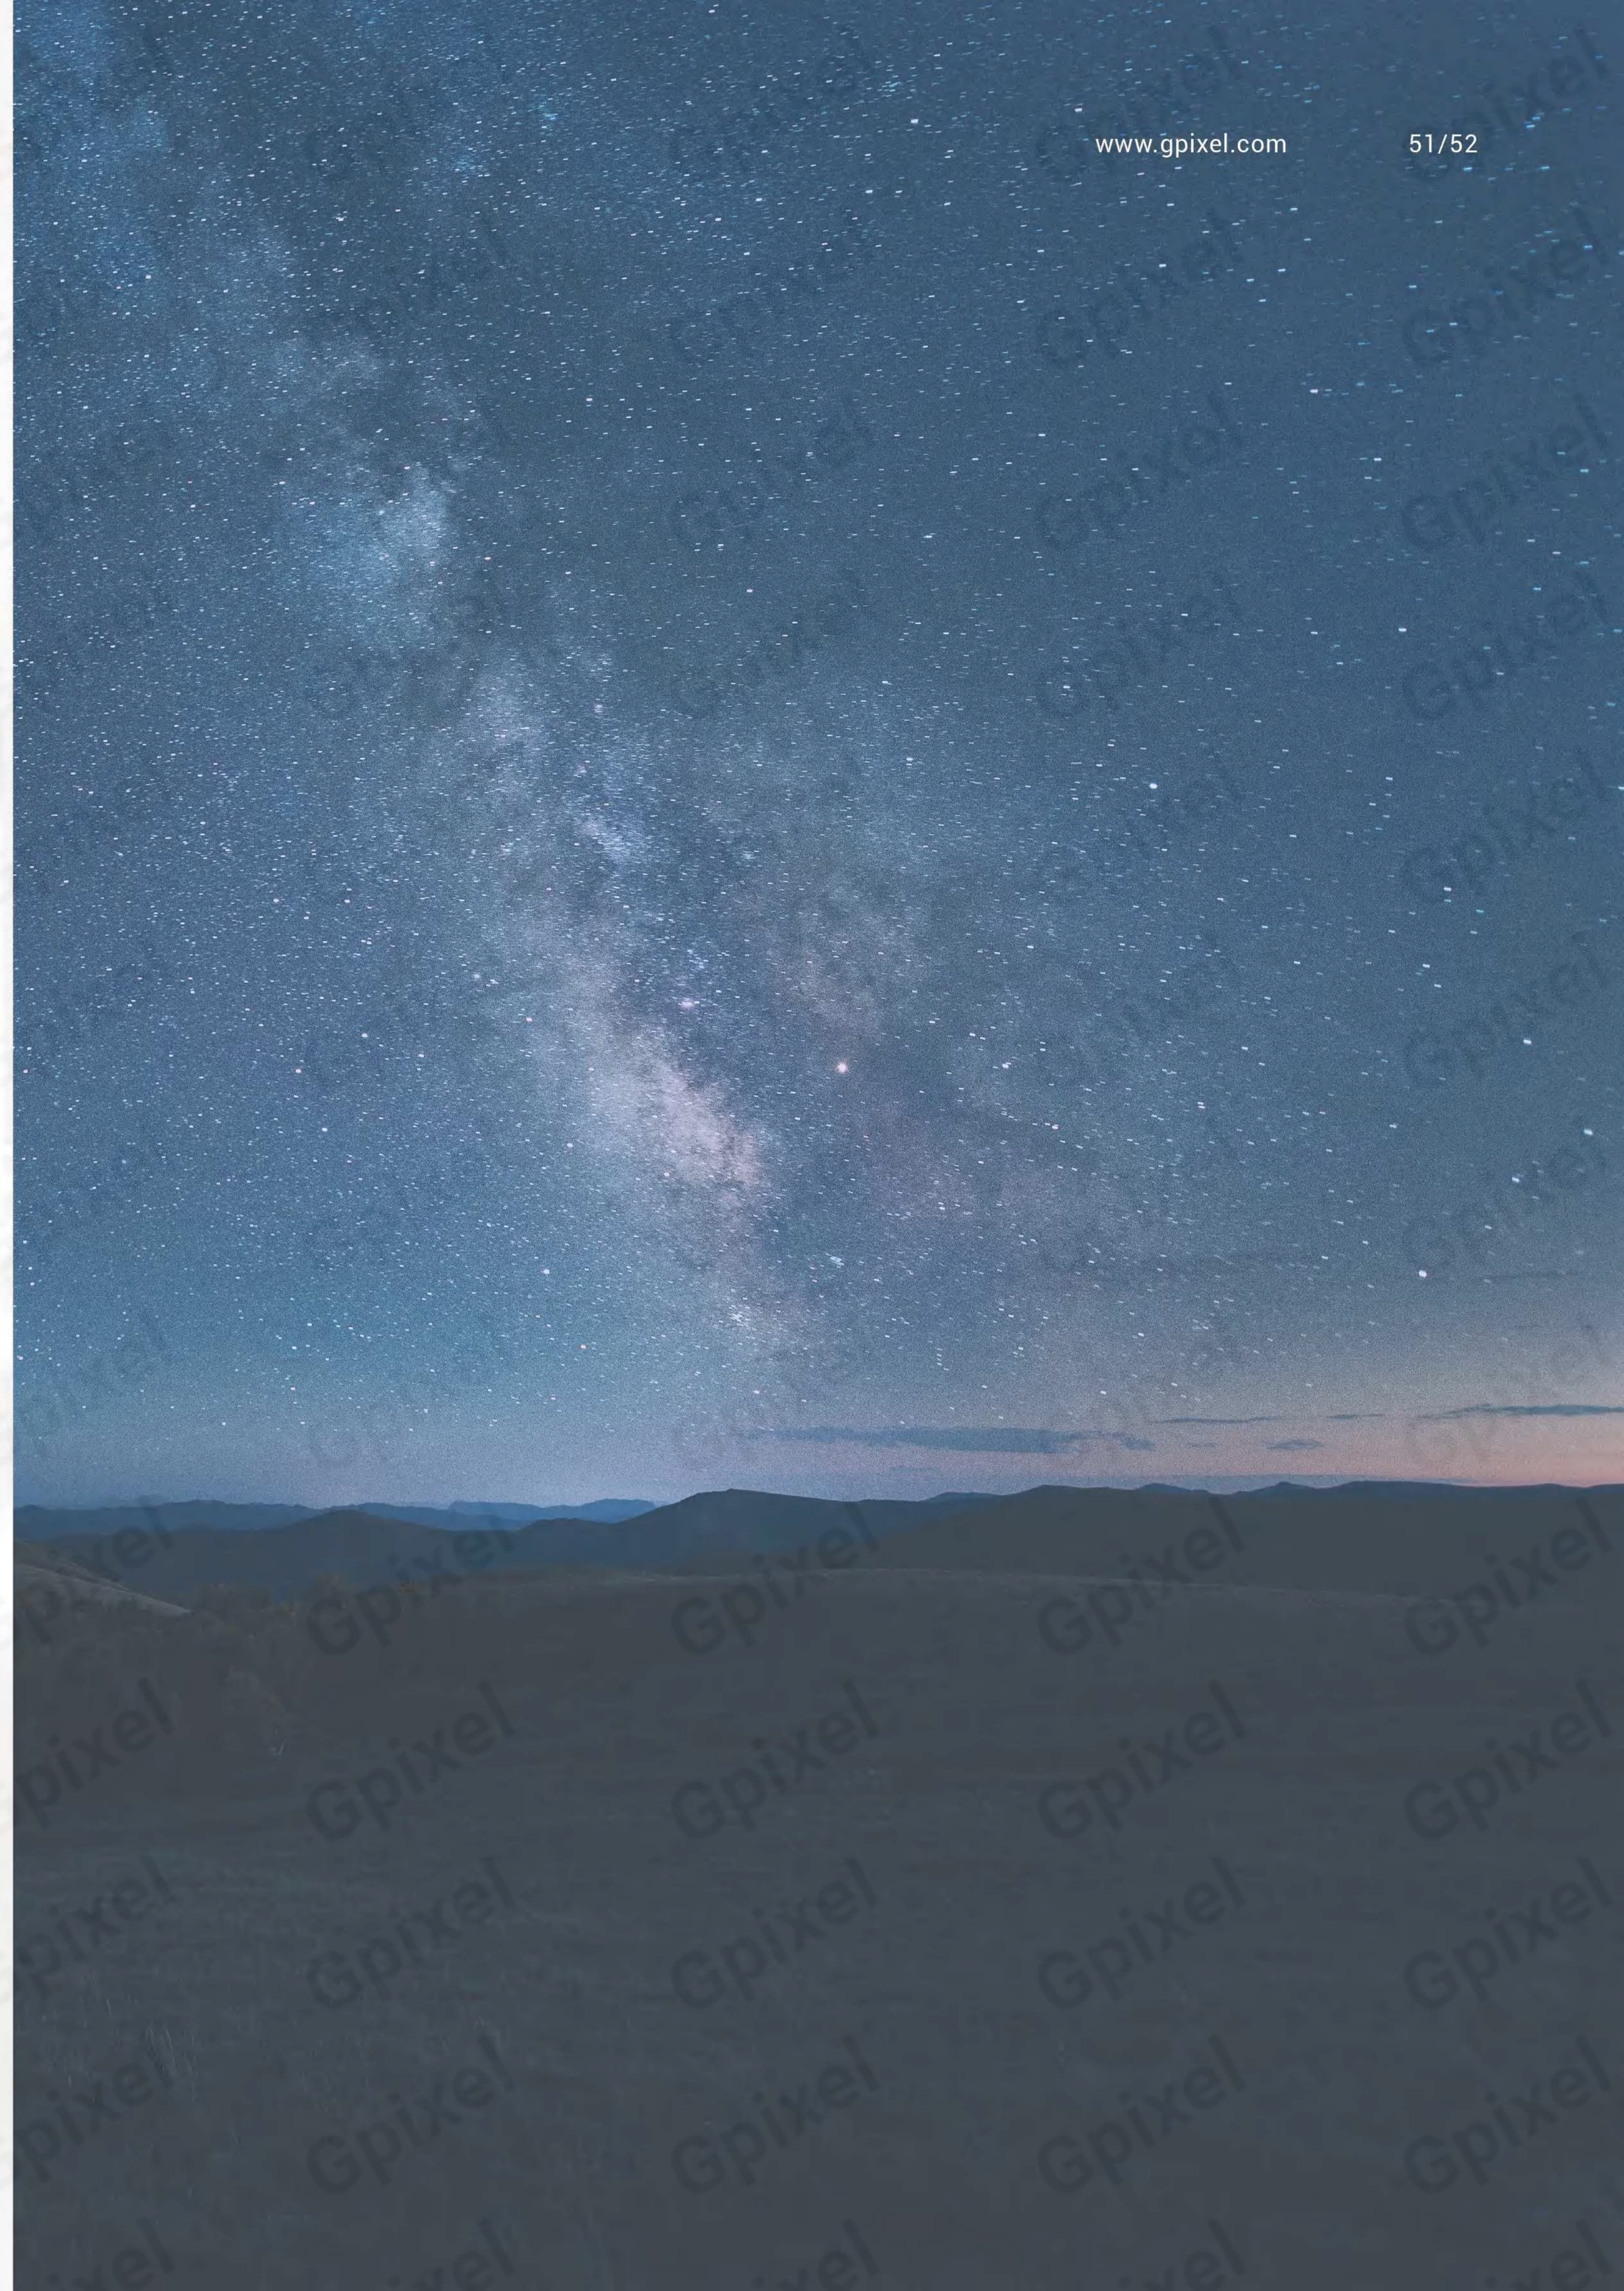



## Area Scan CMOS Image Sensor

The GTOF family is a new Gpixel iToF image sensor product range featuring pixel-level stacked BSI technology, targeting high accuracy depth sensing and distance measurement applications.

GTOF0503

### Product Family Features

- Stacked BSI
- High Sensitivity
- High Measuring Accuracy
- Dual Frequency Mode


### Applications

- Vision-guided Robots
- Industrial Automation
- Security monitoring
- Disorderly Grasping
- Logistics
- 3D measurement



# GTOF0503

## VGA ITOF CMOS IMAGE SENSOR

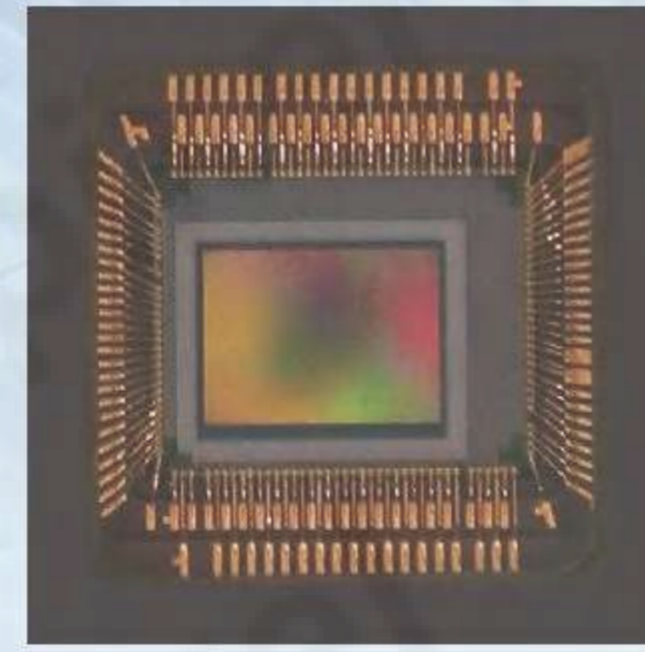

**GTOF0503** is a VGA sensor featuring a 5 μm 3-tap state-of-the-art iToF pixel incorporating a pixel array with a resolution of 640 x 480 pixels. The BSI technology provides excellent sensitivity at NIR wavelengths. In addition, the wafer stacking enables very high modulation frequencies of up to up to 3 ns pulse width and 30 depth frames per second which results in industry-leading depth accuracy at short, mid and long-range distances even in challenging ambient light conditions by using pulse modulation iToF technique. Advanced features such as multiple acquisition modes, depth with single and dual-frequency, low-power standby modes and an industry standard MIPI CSI-2 interface, allow very versatile and flexible operation.

### Key Features and Benefits

- Machine Vision
- Automated Guided Vehicle
- Industrial Automation
- Bin Picking
- Logistics
- Smart Factory


### Application

- Automation & Inspection
- Logistics
- ADAS & Intelligent Driving
- Robotics
- Consumer Electronics

### Specifications

<b>Nr of Active Pixels</b>	640(H) x 480(V)	<b>Optical Format</b>	1/4"
<b>Pixel Size</b>	5 μm x 5 μm	<b>Photosensitive Area</b>	3.2 mm x 2.4 mm
<b>Shutter Type</b>	Global Shutter	<b>Peak QE</b>	31.5% (850 nm), 13.8% (940 nm)
<b>Full Well Capacity</b>	9 ke <sup>-</sup>	<b>ADC</b>	11 bit
<b>Temporal Noise</b>	8.2 e <sup>-</sup>	<b>Cmod</b>	>80% (3 ns)
<b>Dynamic Range</b>	60.8 dB	<b>Max Frame Rate</b>	60 fps
<b>Output Format</b>	4 lanes CSI-2 MIPI	<b>Region of Interest Readout</b>	Vertical (up to 4 windows), horizontal (up to 1 window)
<b>Chroma</b>	Mono	<b>Power Consumption</b>	<1.2 W
<b>Supply Voltage</b>	2.8 V, 1.8 V, 1.2 V, 1.3 V	<b>Package</b>	139 pads (Die), 69 pins LGA (9.2 mm x 9.2 mm)

### Package drawing

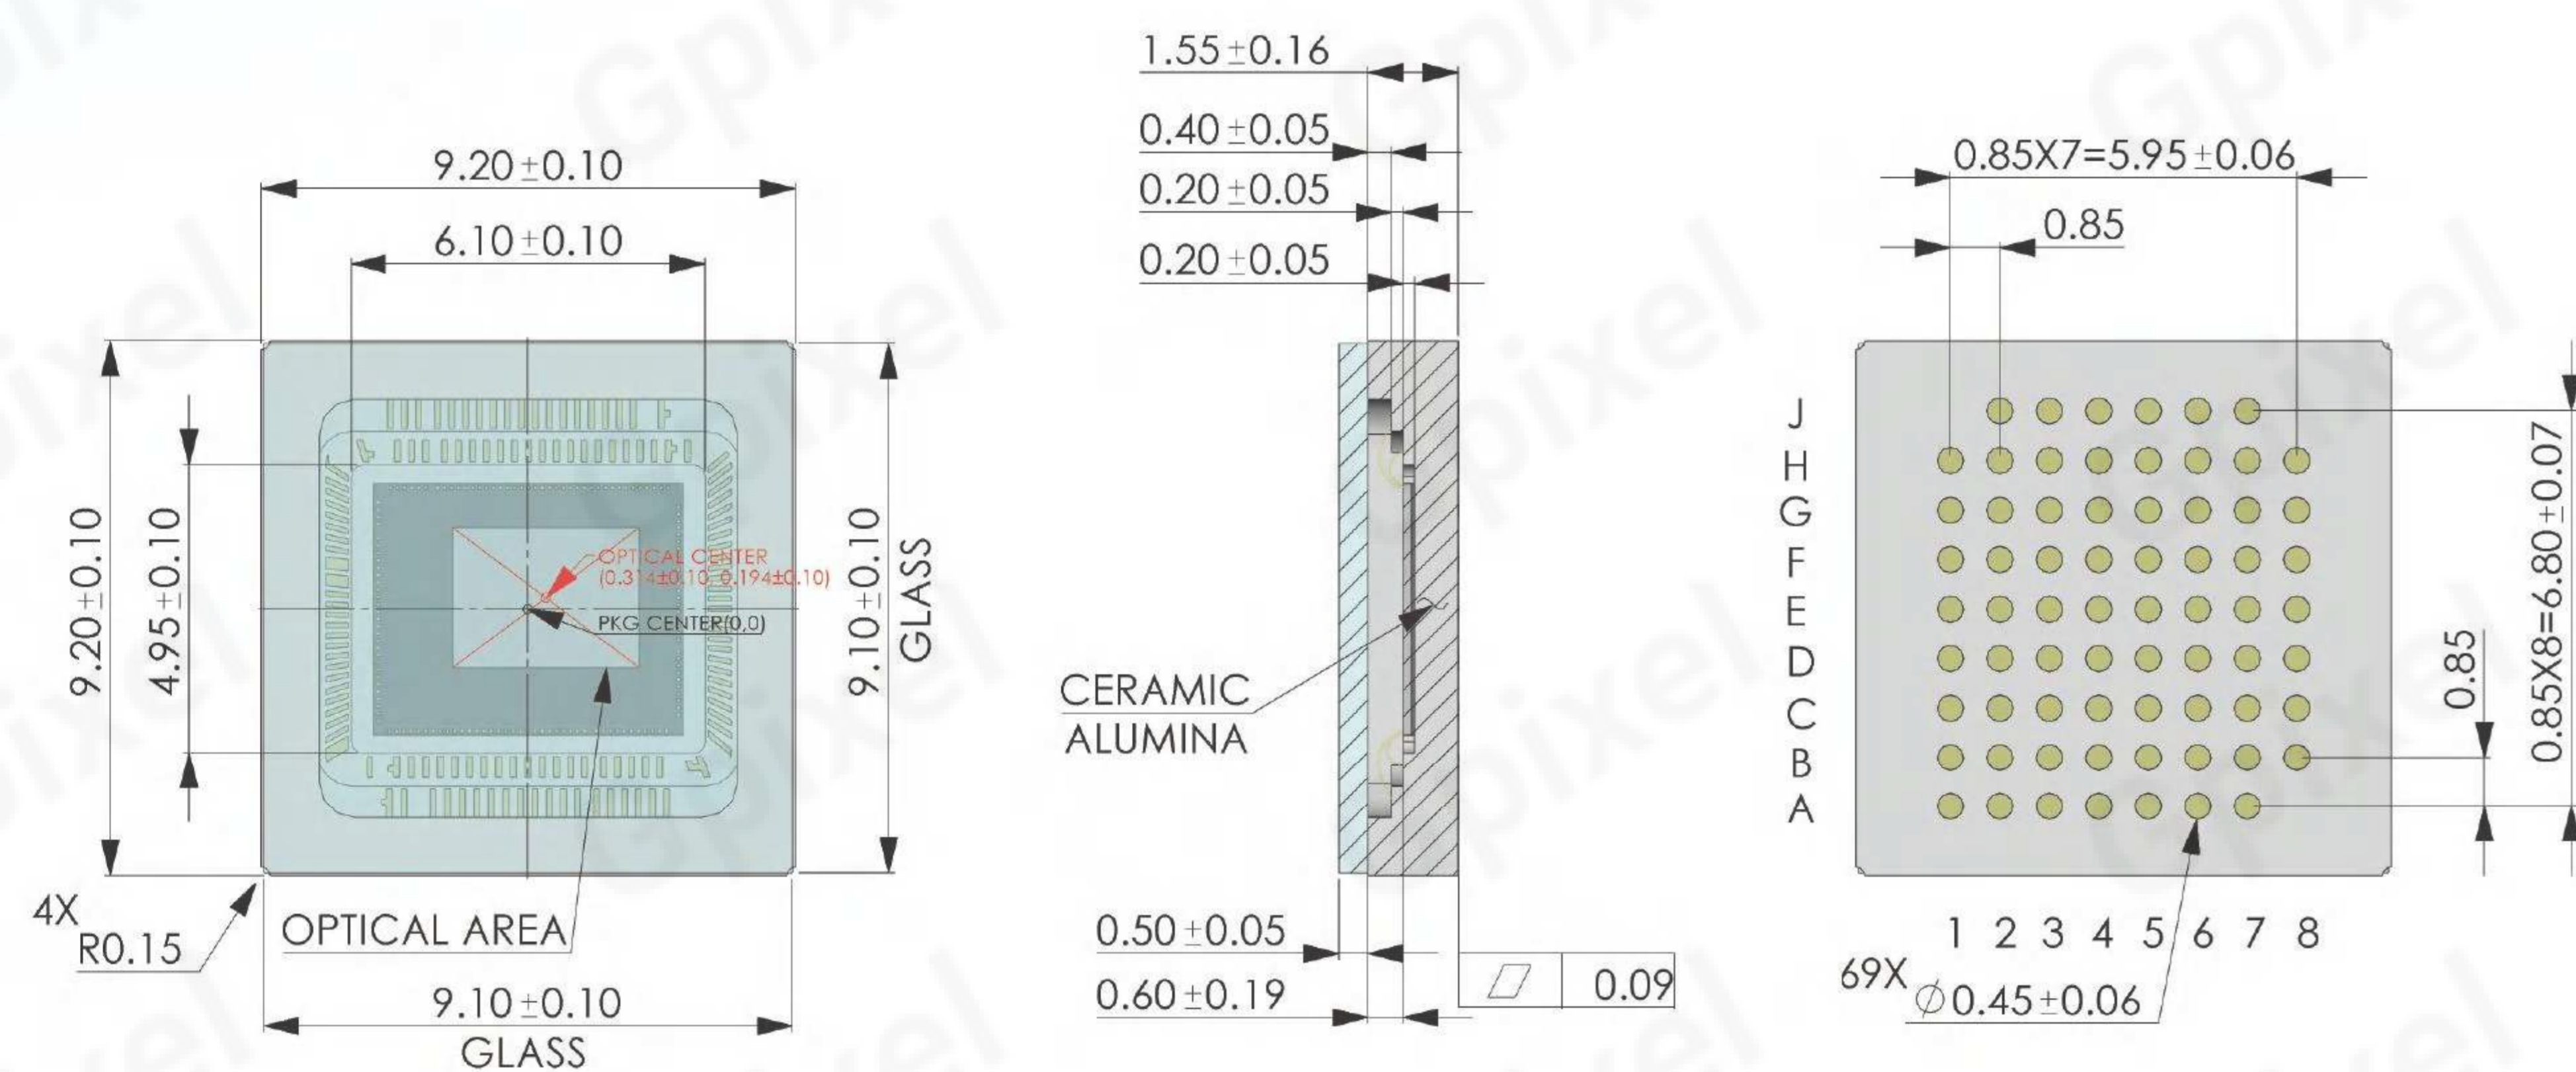

GMAX | GSPRINT | GSENSE | GLUX | GTOF | **GCINE** | GL | GXS | GIR

## Area Scan CMOS Image Sensor

The GCINE family is Gpixel's newest flagship product family of truly innovative products for cinematography, drones, production imaging and other video applications, utilizing backside illumination to achieve high sensitivity and exceptional dynamic range.

GCINE3243

GCINE4349

### Product Family Features

- Stacked BSI
- Low Noise
- High Sensitivity
- HDR


### Applications

- Professional imaging



# GCINE3243

## 8K APS-sized CMOS Image Sensor

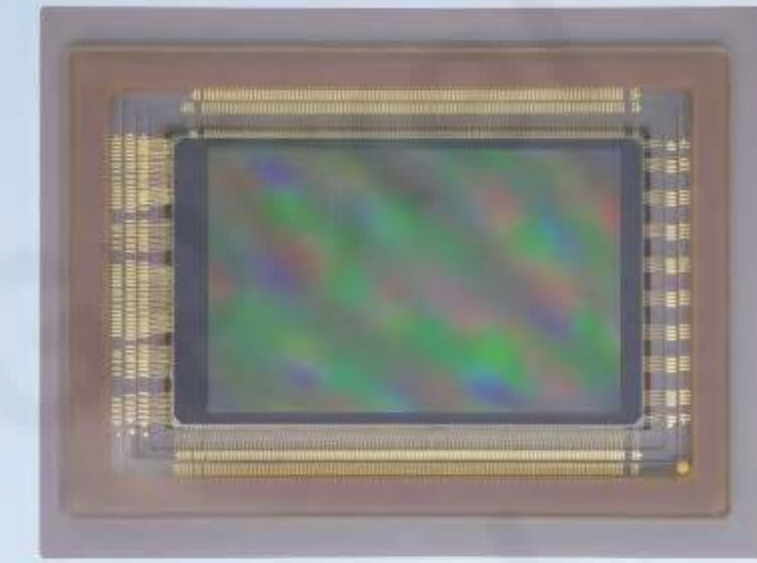

GCINE3243 is a 43 MP 26.2 x 16.7 mm<sup>2</sup> sized APS-style image sensor with a 3.2 μm<sup>2</sup> BSI pixel size designed specifically for the demands of high-end video imaging. With a resolution of 8192 x 5232 pixels and highly configurable read out, 8K video at 60 fps or binned 4K video at 120 fps is supported, all at an impressive bit depth of up to 14 bits per pixel. Readout of the image data occurs over 32 Sub LVDS channels (1.05 Gbps/channel).

The stacking technology used in the GCINE3243 sensor enables excellent optical performance and readout speeds. Sensor also support a variety of operation modes tailored for specific applications. A dedicated Digital Still Camera (DSC) mode is supported, improving the readout noise and offering global reset shutter control. Additional HDR features, like dual gain readout, on-chip digital compression and multi-slope pixel response are all available.

### Key Features and Benefits


- Stacked BSI Architecture
- High Full Well Charge
- High Dynamic Range
- Low Noise
- Multi-Slope HDR
- Dual Gain HDR

### Application

- Cinematography
- Unmanned Aerial Vehicles (UAV)


Specifications			
<b>Nr of Active Pixels</b>	8192(H) x 5232(V)	<b>Optical Format</b>	APS-C
<b>Pixel Size</b>	3.2 μm x 3.2 μm	<b>Photosensitive Area</b>	26.2 mm x 16.7 mm
<b>Shutter Type</b>	Rolling Shutter & DSC	<b>Peak QE</b>	80% (550 nm, Mono)
<b>Full Well Capacity</b>	96 ke <sup>-</sup> (Multi-Exposure Mode)	<b>Temporal Noise</b>	2.5 e <sup>-</sup> (DSC, HG)
<b>Max. SNR</b>	50 dB	<b>Dynamic Range</b>	81 dB (8K HDR mode)
<b>Max Frame Rate</b>	60 fps (8K), 120 fps (4K)	<b>Output Format</b>	32 ch Sub-LVDS
<b>Max. Data Rate</b>	33.6 Gbps	<b>ADC</b>	14 bit
<b>Chroma</b>	RGB, Mono	<b>Power Consumption</b>	2 W-4 W
<b>Supply Voltage</b>	3.3 V, 1.8 V, 1.25 V, -2.2 V, 4.5 V	<b>Package</b>	LGA (48 mm x 35.5 mm)

### Package Drawing

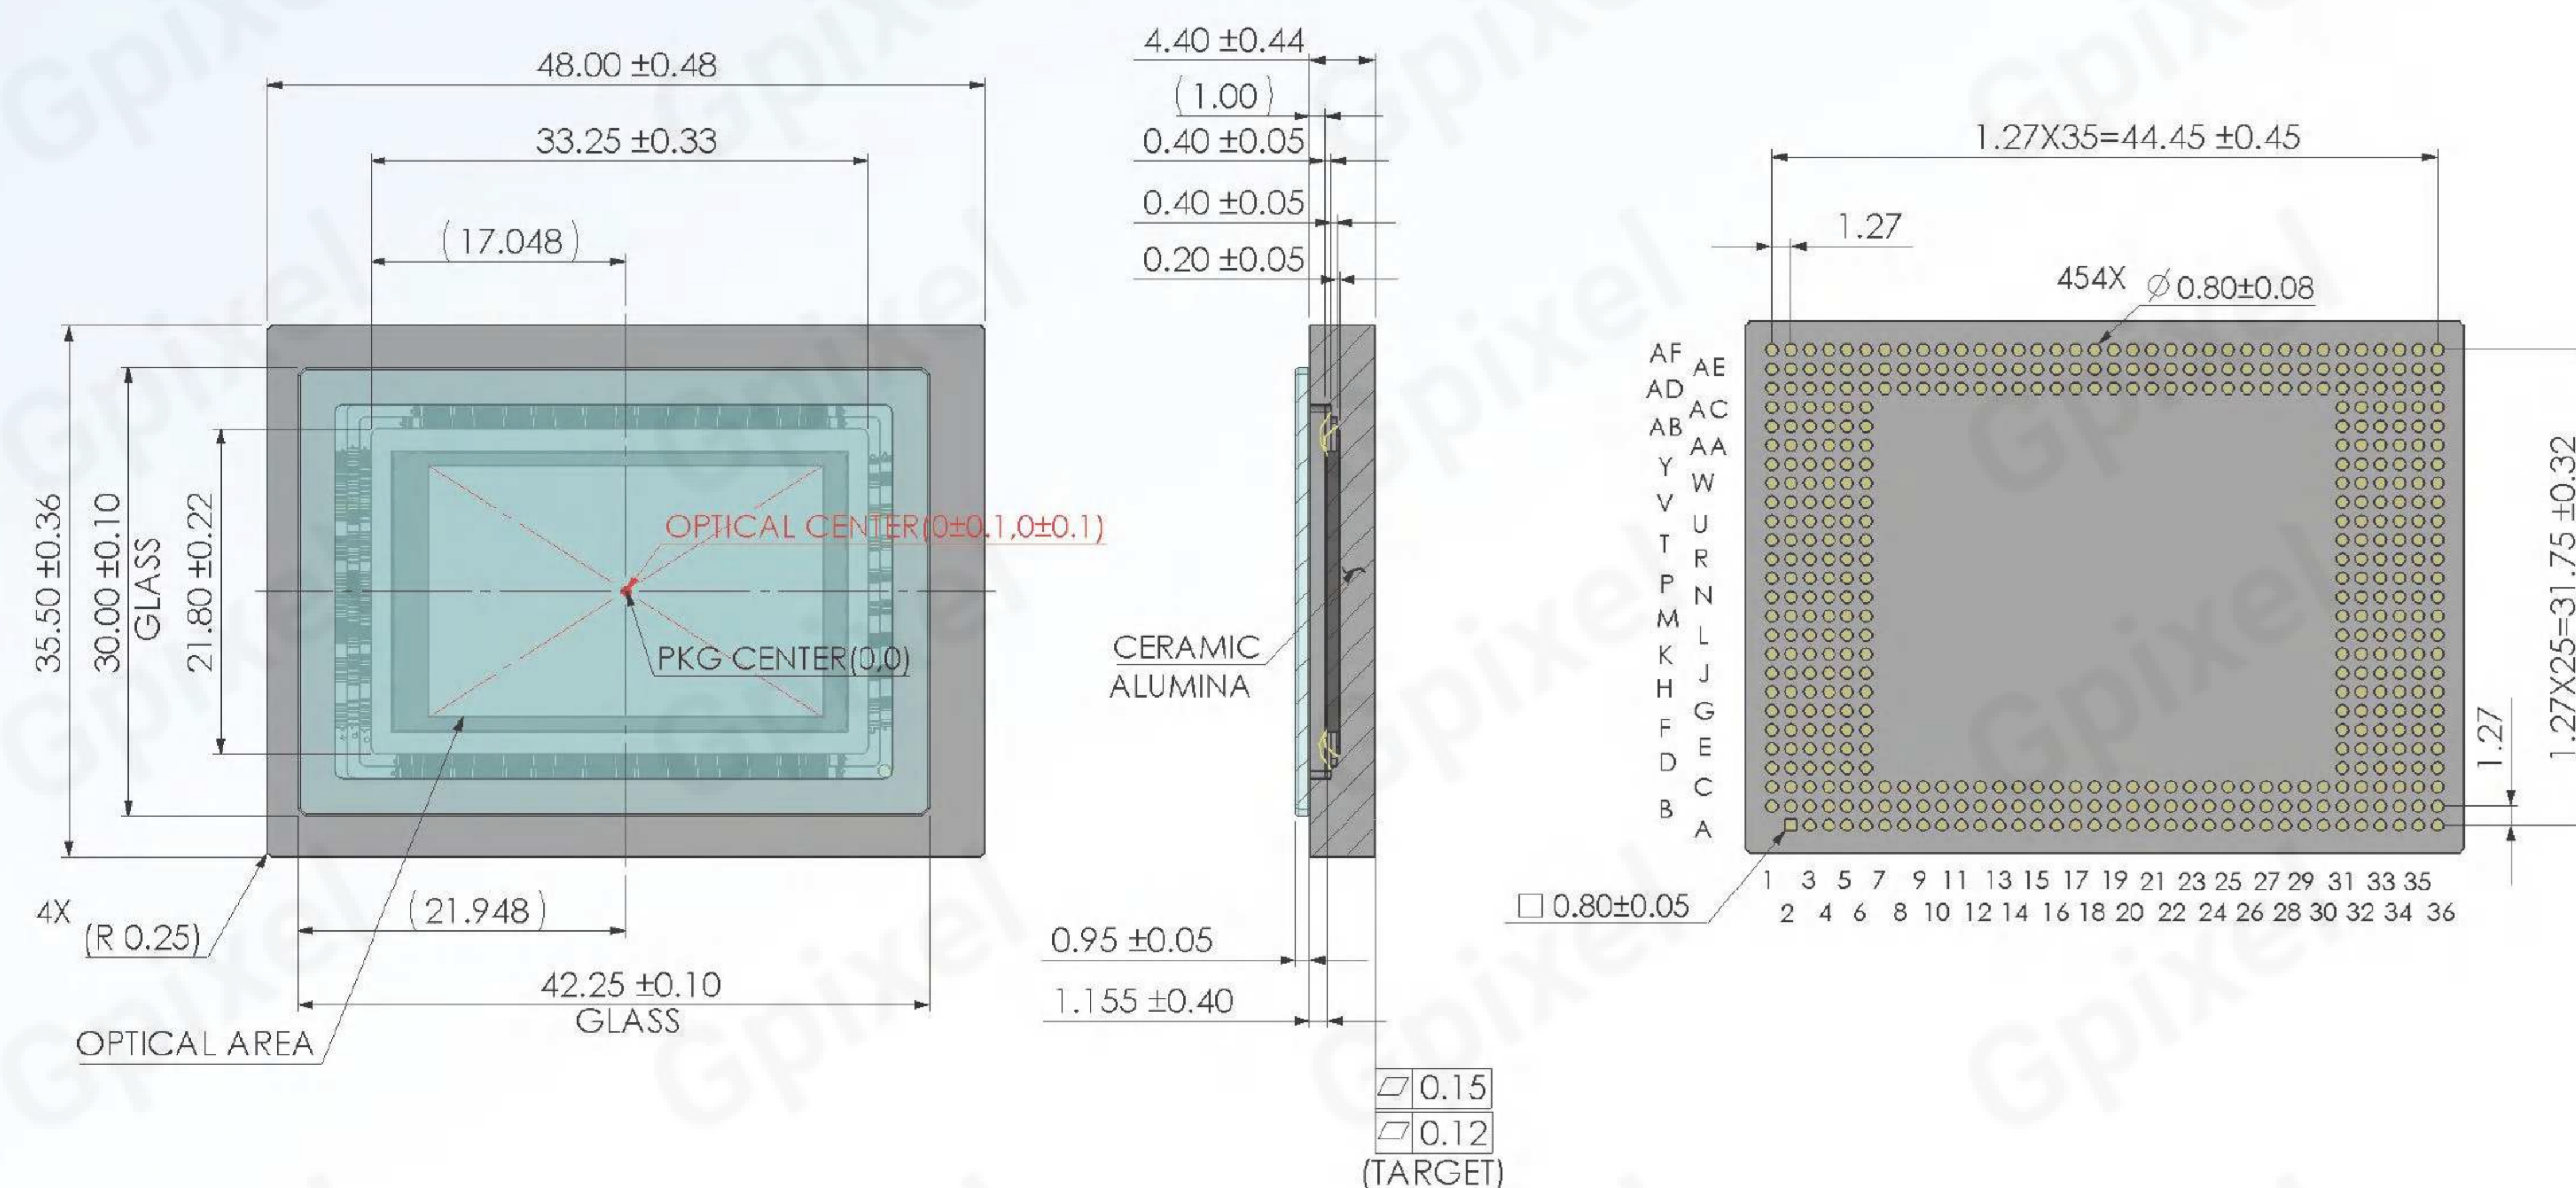

# GCINE4349

## 8K Full Frame-sized CMOS Image Sensor

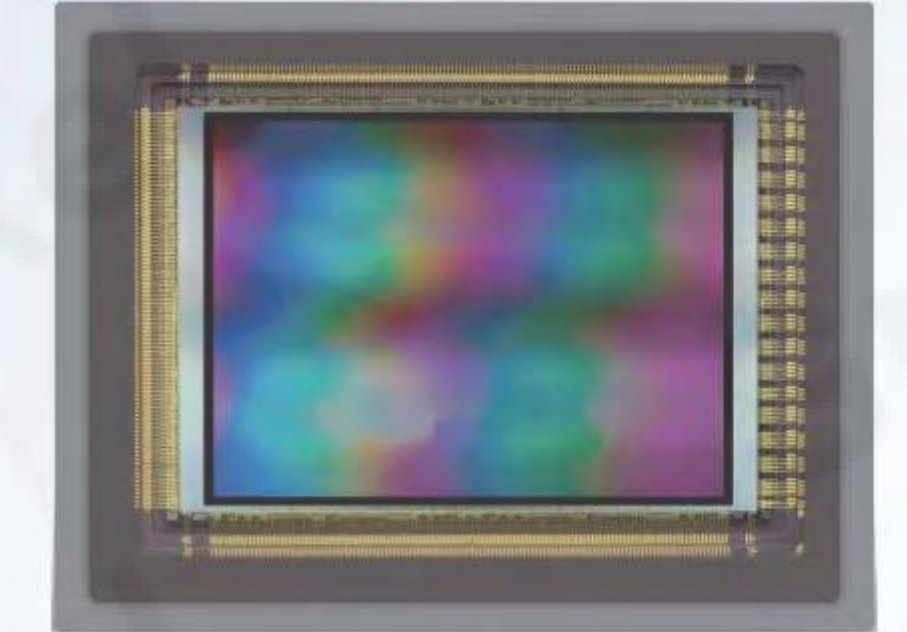

GCINE4349 is a 49 MP (35.2 x 25.8 mm) full frame image sensor with a 4.3 μm BSI pixels designed specifically for the demands and performance of high-end video imaging. With a maximum resolution of 8192 x 6000 pixels, several readout modes are supported to readout 8K or binned 4K video with maximum frame rates of up to 120 fps at 8K resolution and up to 240 fps at binned 4K resolutions, all with a pixel bit depth of up to 16 bit/pixel interfaced over 64 Sub LVDS channels (1.2 Gbps/channel).

GCINE4349 architecture also supports two additional HDR modes. Firstly, a proprietary Variable Slope High Dynamic Range method achieving an exceptionally high 110 dB of Dynamic Range. Secondly, a classic dual gain readout achieving up to 87 dB of Dynamic Range. An additional Digital Still Camera (DSC) mode can be enabled for low noise readout down to 1.7 e<sup>-</sup> and dedicated shutter control for DSC operation. GCINE4349 is packaged in a 431 pins LGA ceramic package and comes with a double side AR coated glass lid.

### Key Features and Benefits


- Stacked BSI
- High Sensitivity
- High Dynamic Range
- Low Noise
- Multi-Slope HDR
- Dual Gain HDR

### Application

- Cinematography
- Unmanned Aerial Vehicles (UAV)

Specifications			
<b>Nr of Active Pixels</b>	8192(H) x 6000(V)	<b>Optical Format</b>	35 mm (Full Frame)
<b>Pixel Size</b>	4.3 μm x 4.3 μm	<b>Photosensitive Area</b>	35.2 mm x 25.8 mm
<b>Shutter Type</b>	Rolling Shutter & DSC	<b>Peak QE</b>	85% (500 nm)
<b>Full Well Capacity</b>	152 ke <sup>-</sup>	<b>Angular Response</b>	35° (80%)
<b>Temporal Noise</b>	1.9 e <sup>-</sup>	<b>Max. SNR</b>	52 dB
<b>Dynamic Range</b>	86.4 dB (8K HDR mode)	<b>Max Frame Rate</b>	120 fps (8K), 240 fps (4K)
<b>Output Format</b>	64 ch Sub-LVDS	<b>Max. Data Rate</b>	76.8 Gbps
<b>Chroma</b>	RGB Color	<b>Power Consumption</b>	7.6 W (8K HDR)
<b>Supply Voltage</b>	3.3 V, 3.1 V, 1.8 V, 1.25 V, -2.2 V	<b>Package</b>	431 pins LGA (57.6 mm x 44.4 mm)

### Package Drawing

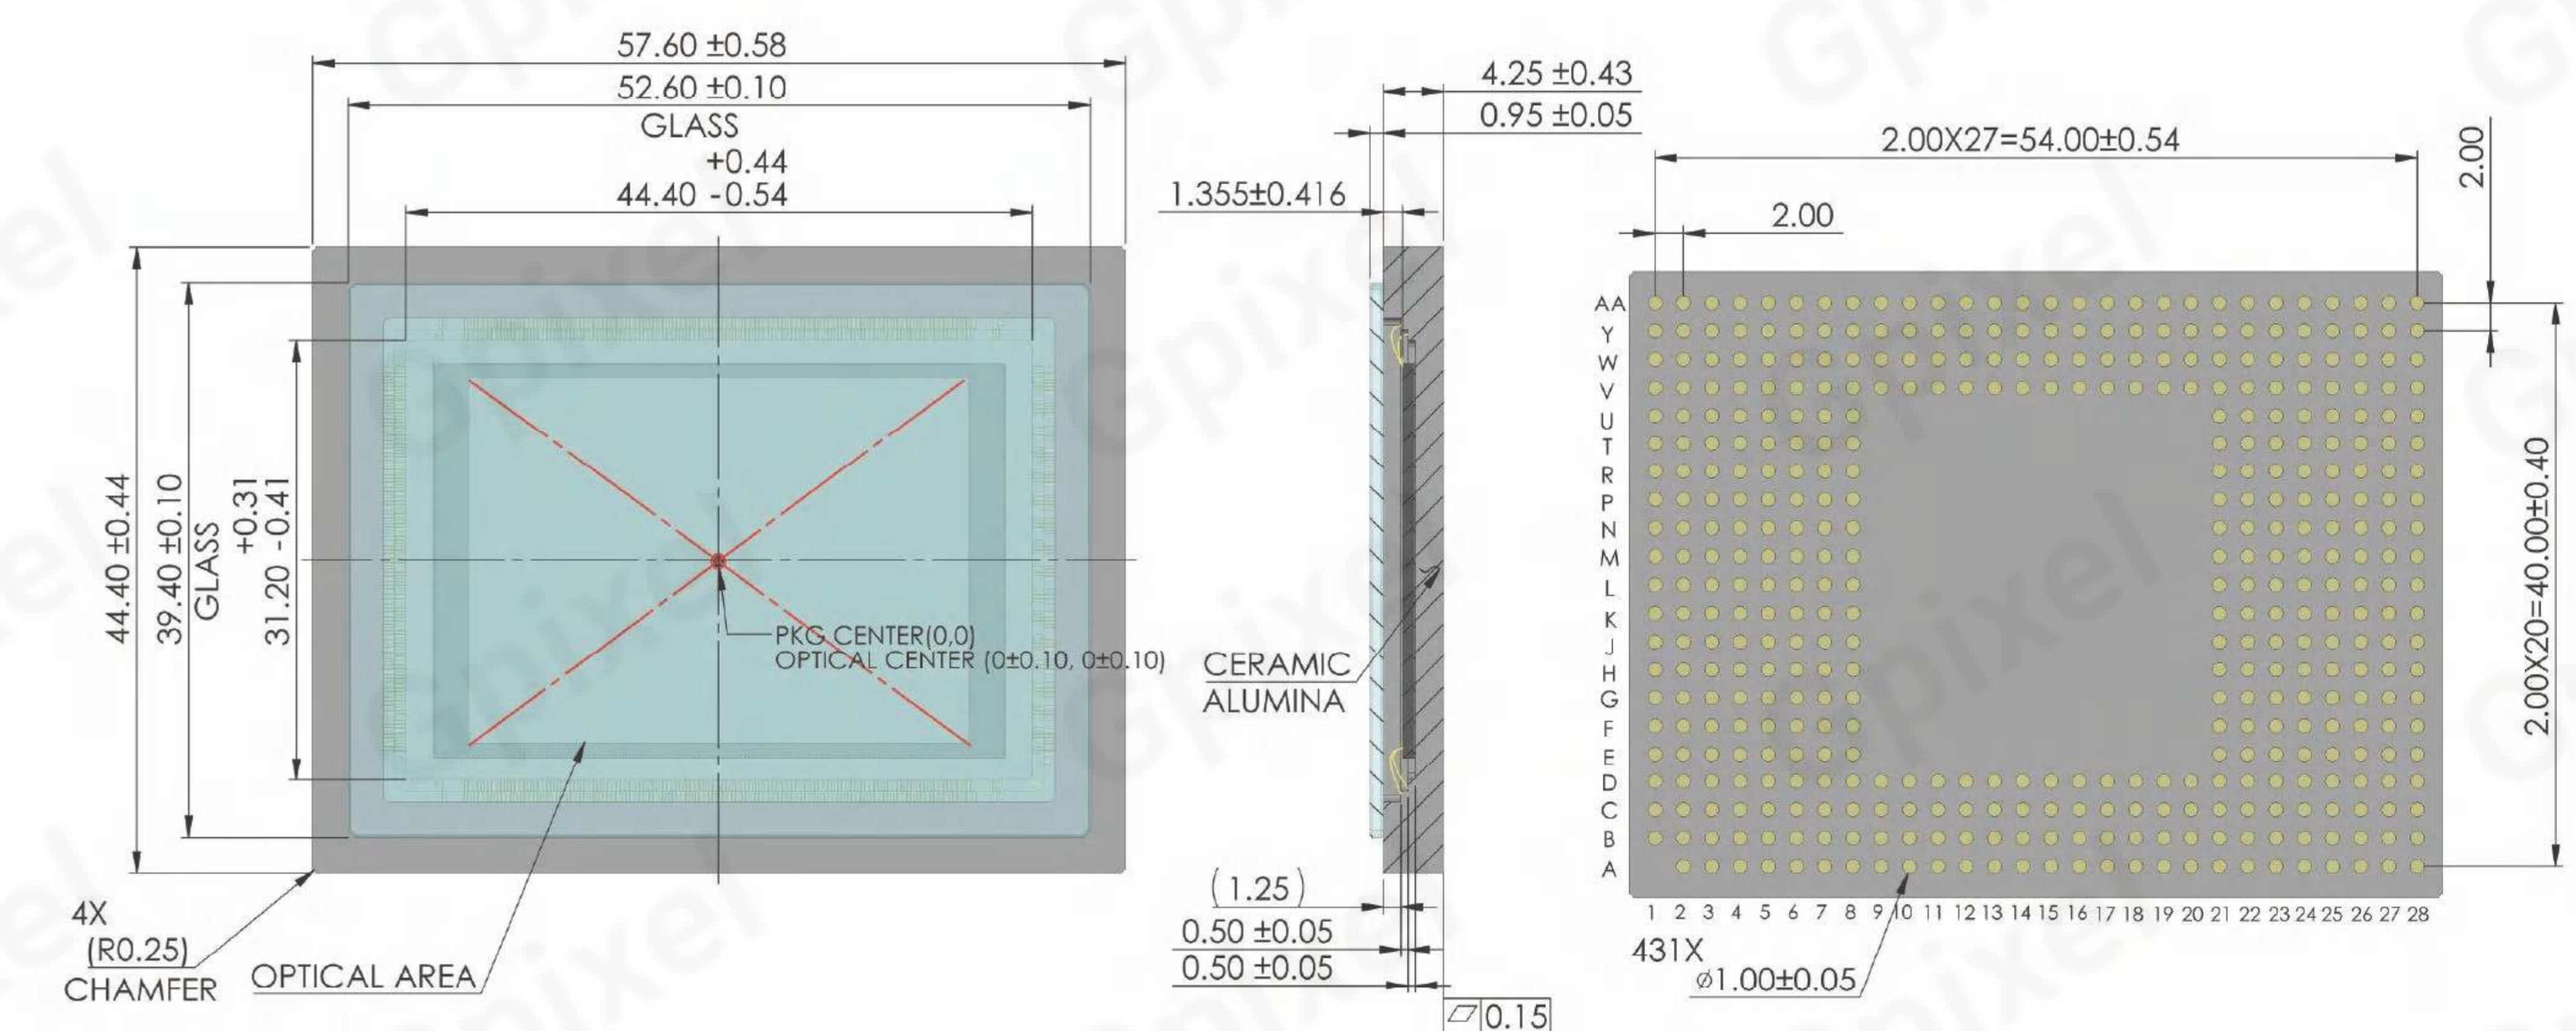

GMAX | GSPRINT | GSENSE | GLUX | GTOF | GCINE | **GL** | GXS | GIR

## Line Scan CMOS Image Sensor

The GL sensor family from Gpixel comprises a wide range of horizontal resolutions, ranging from 2k to 16k, with line rates of up to 200 kHz. These sensors feature pixel sizes of 3.5  $\mu\text{m}$ , 5  $\mu\text{m}$ , 7  $\mu\text{m}$ , and 14  $\mu\text{m}$ , providing a comprehensive selection to suit diverse line scan applications.

GLR1205BSI-S

GLR1202BSI-L

GLR1402BSI-M

GL1402

GLR1002BSI-S

GL3504

GL0402

GL7004

GL0816

GLT5009BSI

GLT5008BSI

GLT5016BSI

GL7008

GL3516

### Product Family Features

- Global Shutter
- TDI
- High Speed
- High Resolution

### Applications

- Lithium Battery Inspection
- Printing Inspection
- Track Inspection
- PCB Testing
- Screen Inspection
- Automatic Sorting
- Semiconductor Testing
- Displacement Metering



# GLR1205BSI-S

## 250 μm LINE SCAN CMOS IMAGE SENSOR



**GLR1205BSI-S** is a single-line linear image sensor with rectangular pixels and analog output designed for use in displacement sensors. The sensor's 512 pixels are each 12.5 μm (H) x 250 μm (V) and provide a full well capacity of 2.8 million electrons and a maximum signal-to-noise ratio of 71.1 dB. The large pixel also increases the photosensitive area and facilitates easy alignment of the laser spot. Backside thinning technology enables a peak quantum efficiency of 95%, and almost 50% at 650 nm. A charge transfer time of only 2.5 μs ensures excellent lag performance. The single analog output allows image processing using an MCU module, and the small CSP package enables the design of a compact displacement sensor.

The GLR1205BSI-S image sensor is designed for the accurate detection of surfaces and precise distance measurement under a variety of lighting conditions.

### Key Features and Benefits


- BSI Linear Sensor
- Rectangular Pixel
- High Sensitivity
- CSP Package
- Large FWC

### Application

- Automation & Inspection
- Logistic & Positioning


Specifications			
Nr of Active Pixels	512(H) x 1(V)	Optical Format	6.4 mm
Pixel Size	12.5 μm x 250 μm	Shutter Type	Global Shutter
Peak QE	95%	Temporal Noise	0.58 mV rms
Saturation Output Voltage	2.45 V	Max Line Rate	9.43 kHz
Dynamic Range	4224: 1	Input clock rate	5 MHz
Output Format	Analog Output	Max. Data Rate	5 MHz
Chroma	Mono	Power Consumption	90 mW
Supply Voltage	3.3 V	Package	17 pins CSP (7.39 mm x 1.15 mm)

### Package Drawing

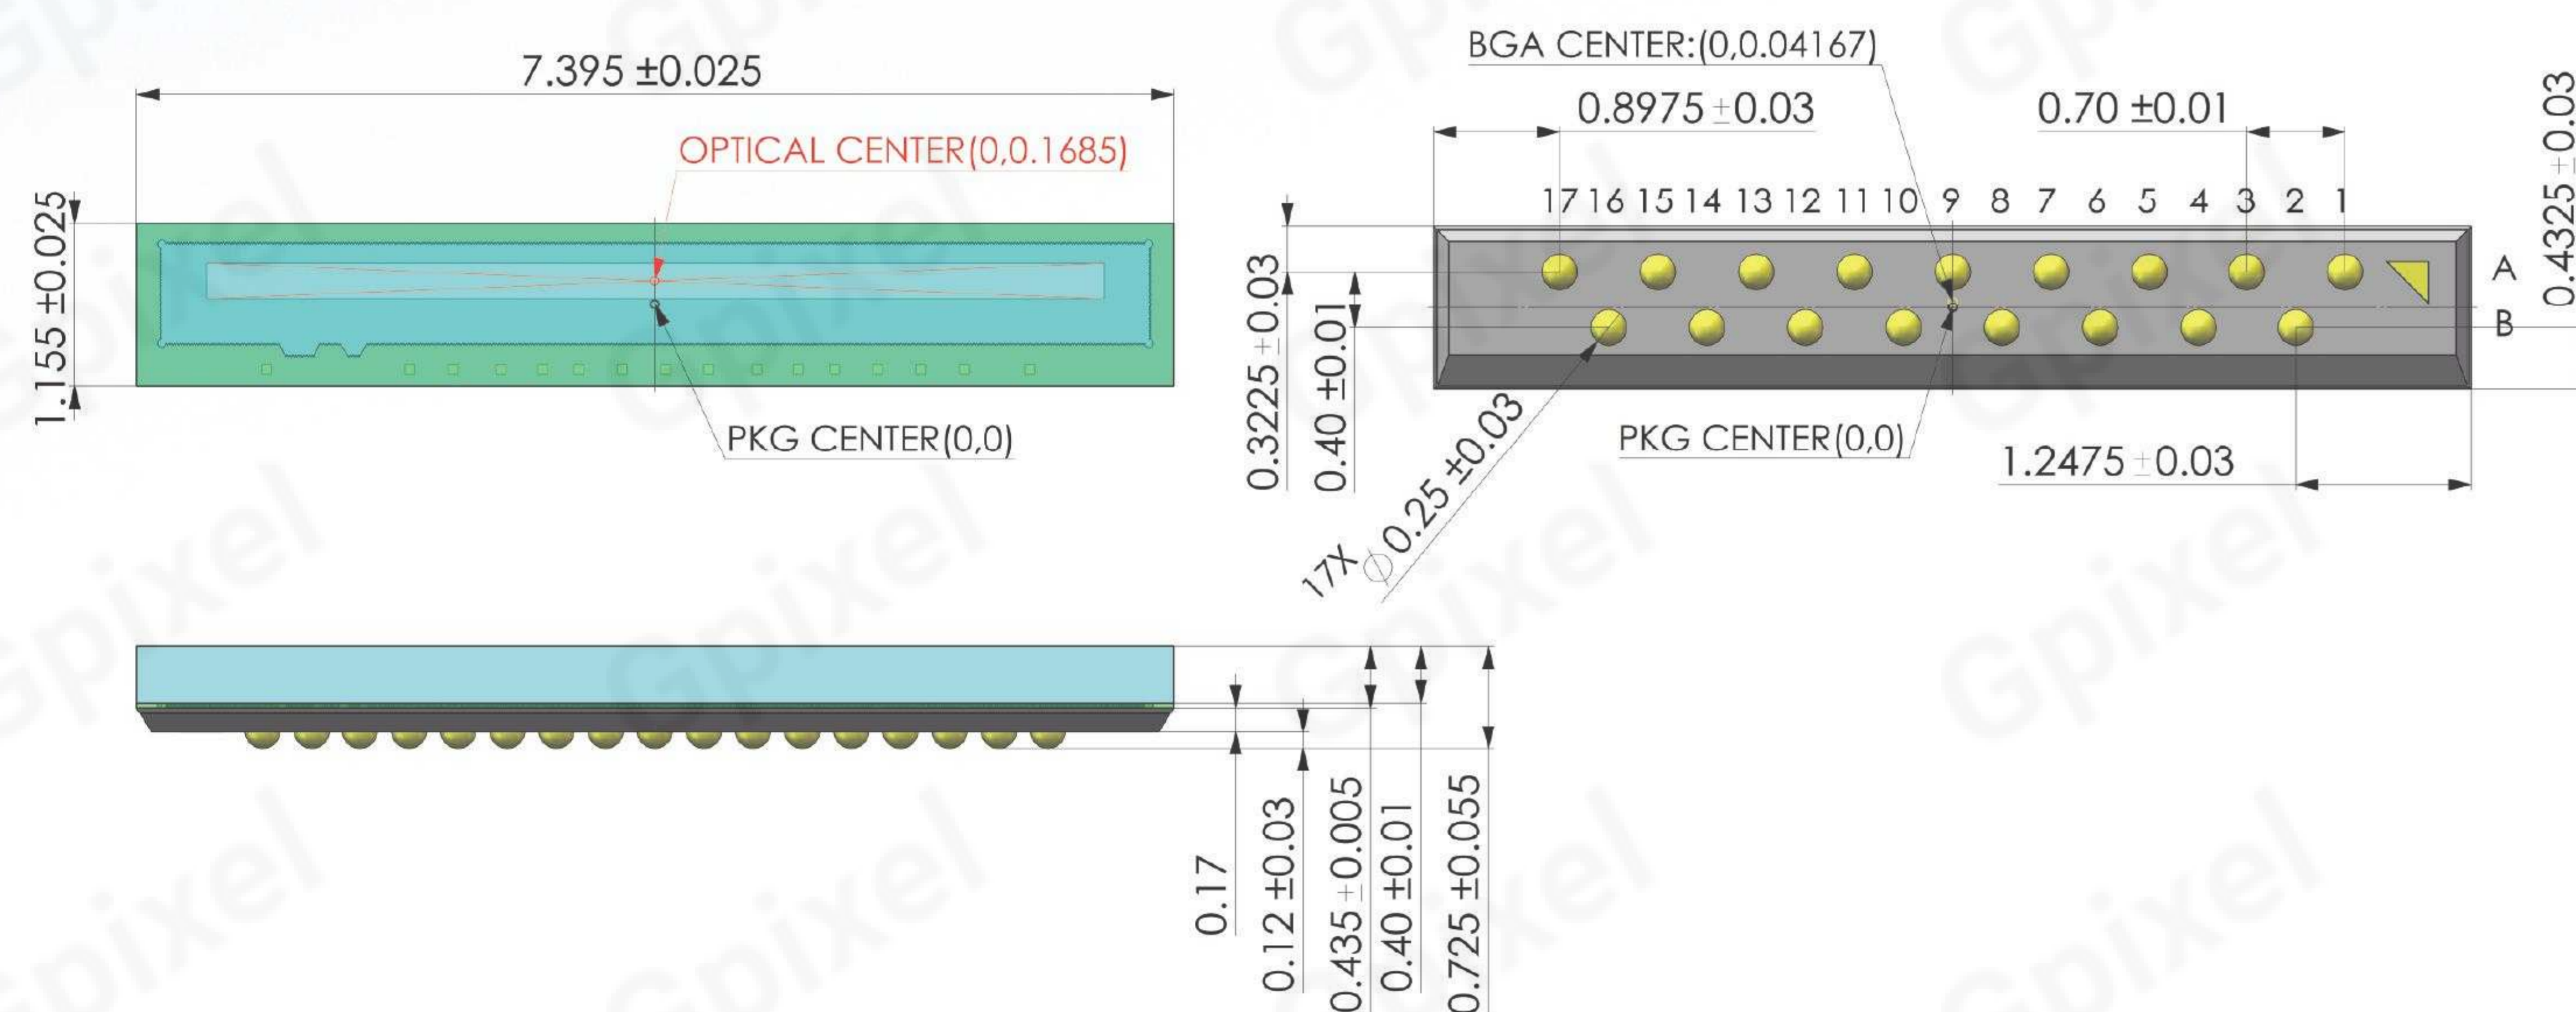

# GLR1202BSI-L

## 2K HIGH SPEED BSI LINE SCAN CMOS IMAGE SENSOR

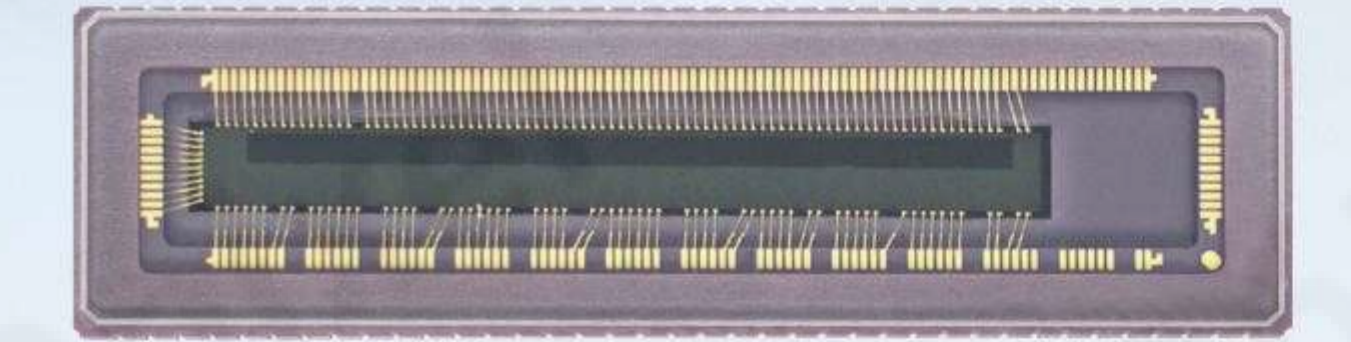

**GLR1202BSI-L** features a large rectangular pixel size of 12.5 μm (H) x 1000 μm (V) and a resolution of 2000 x 1 pixels. Manufactured using advanced BSI wafer processing, it achieves a quantum efficiency of nearly 90% at 650 nm. Sensor offers high FWC of 2 Me<sup>-</sup> with high dynamic range of 69 dB. User can also switch to High Gain mode to achieve lower noise based on application demand.

In addition, sensor supports on-chip 1 x 2 binning, doubling the sensitivity with higher line rate of 350 kHz.

**GLR1202BSI-L** is packaged in a CLCC housing with double-sided anti-reflection coated glass.

### Key Features and Benefits


- Pixel Size: 12.5 μm x 1000 μm
- High QE
- Fast Line Rate: 240 kHz
- 1x2 Binning

### Application

- Automation & Inspection
- Spectroscopy
- Metrology


Specifications			
Nr of Active Pixels	2000 (H) x 1 (V)	Optical Format	25 mm
Pixel Size	12.5 μm x 1000 μm	Shutter Type	Global Shutter
Peak QE	91 % (440 nm)	Temporal Noise	675 e <sup>-</sup> (LG), 215 e <sup>-</sup> (HG)
Full Well Capacity	2 Me <sup>-</sup> (LG), 0.18 Me <sup>-</sup> (HG)	Max Line Rate	240 kHz, 350 kHz (1x2 binning)
Dynamic Range	69 dB (LG), 58 dB (HG)	Max. Data Rate	6 Gbps
Output Format	5xSub-LVDS	ADC	12 bit
Chroma	Mono	Power Consumption	< 500 mW
Power Consumption	3.3 V (Analog), 1.8 V (IO), 1.5 V (Digital)	Package	76 pins CLCC (40 mm x 11 mm)

### Package Drawing

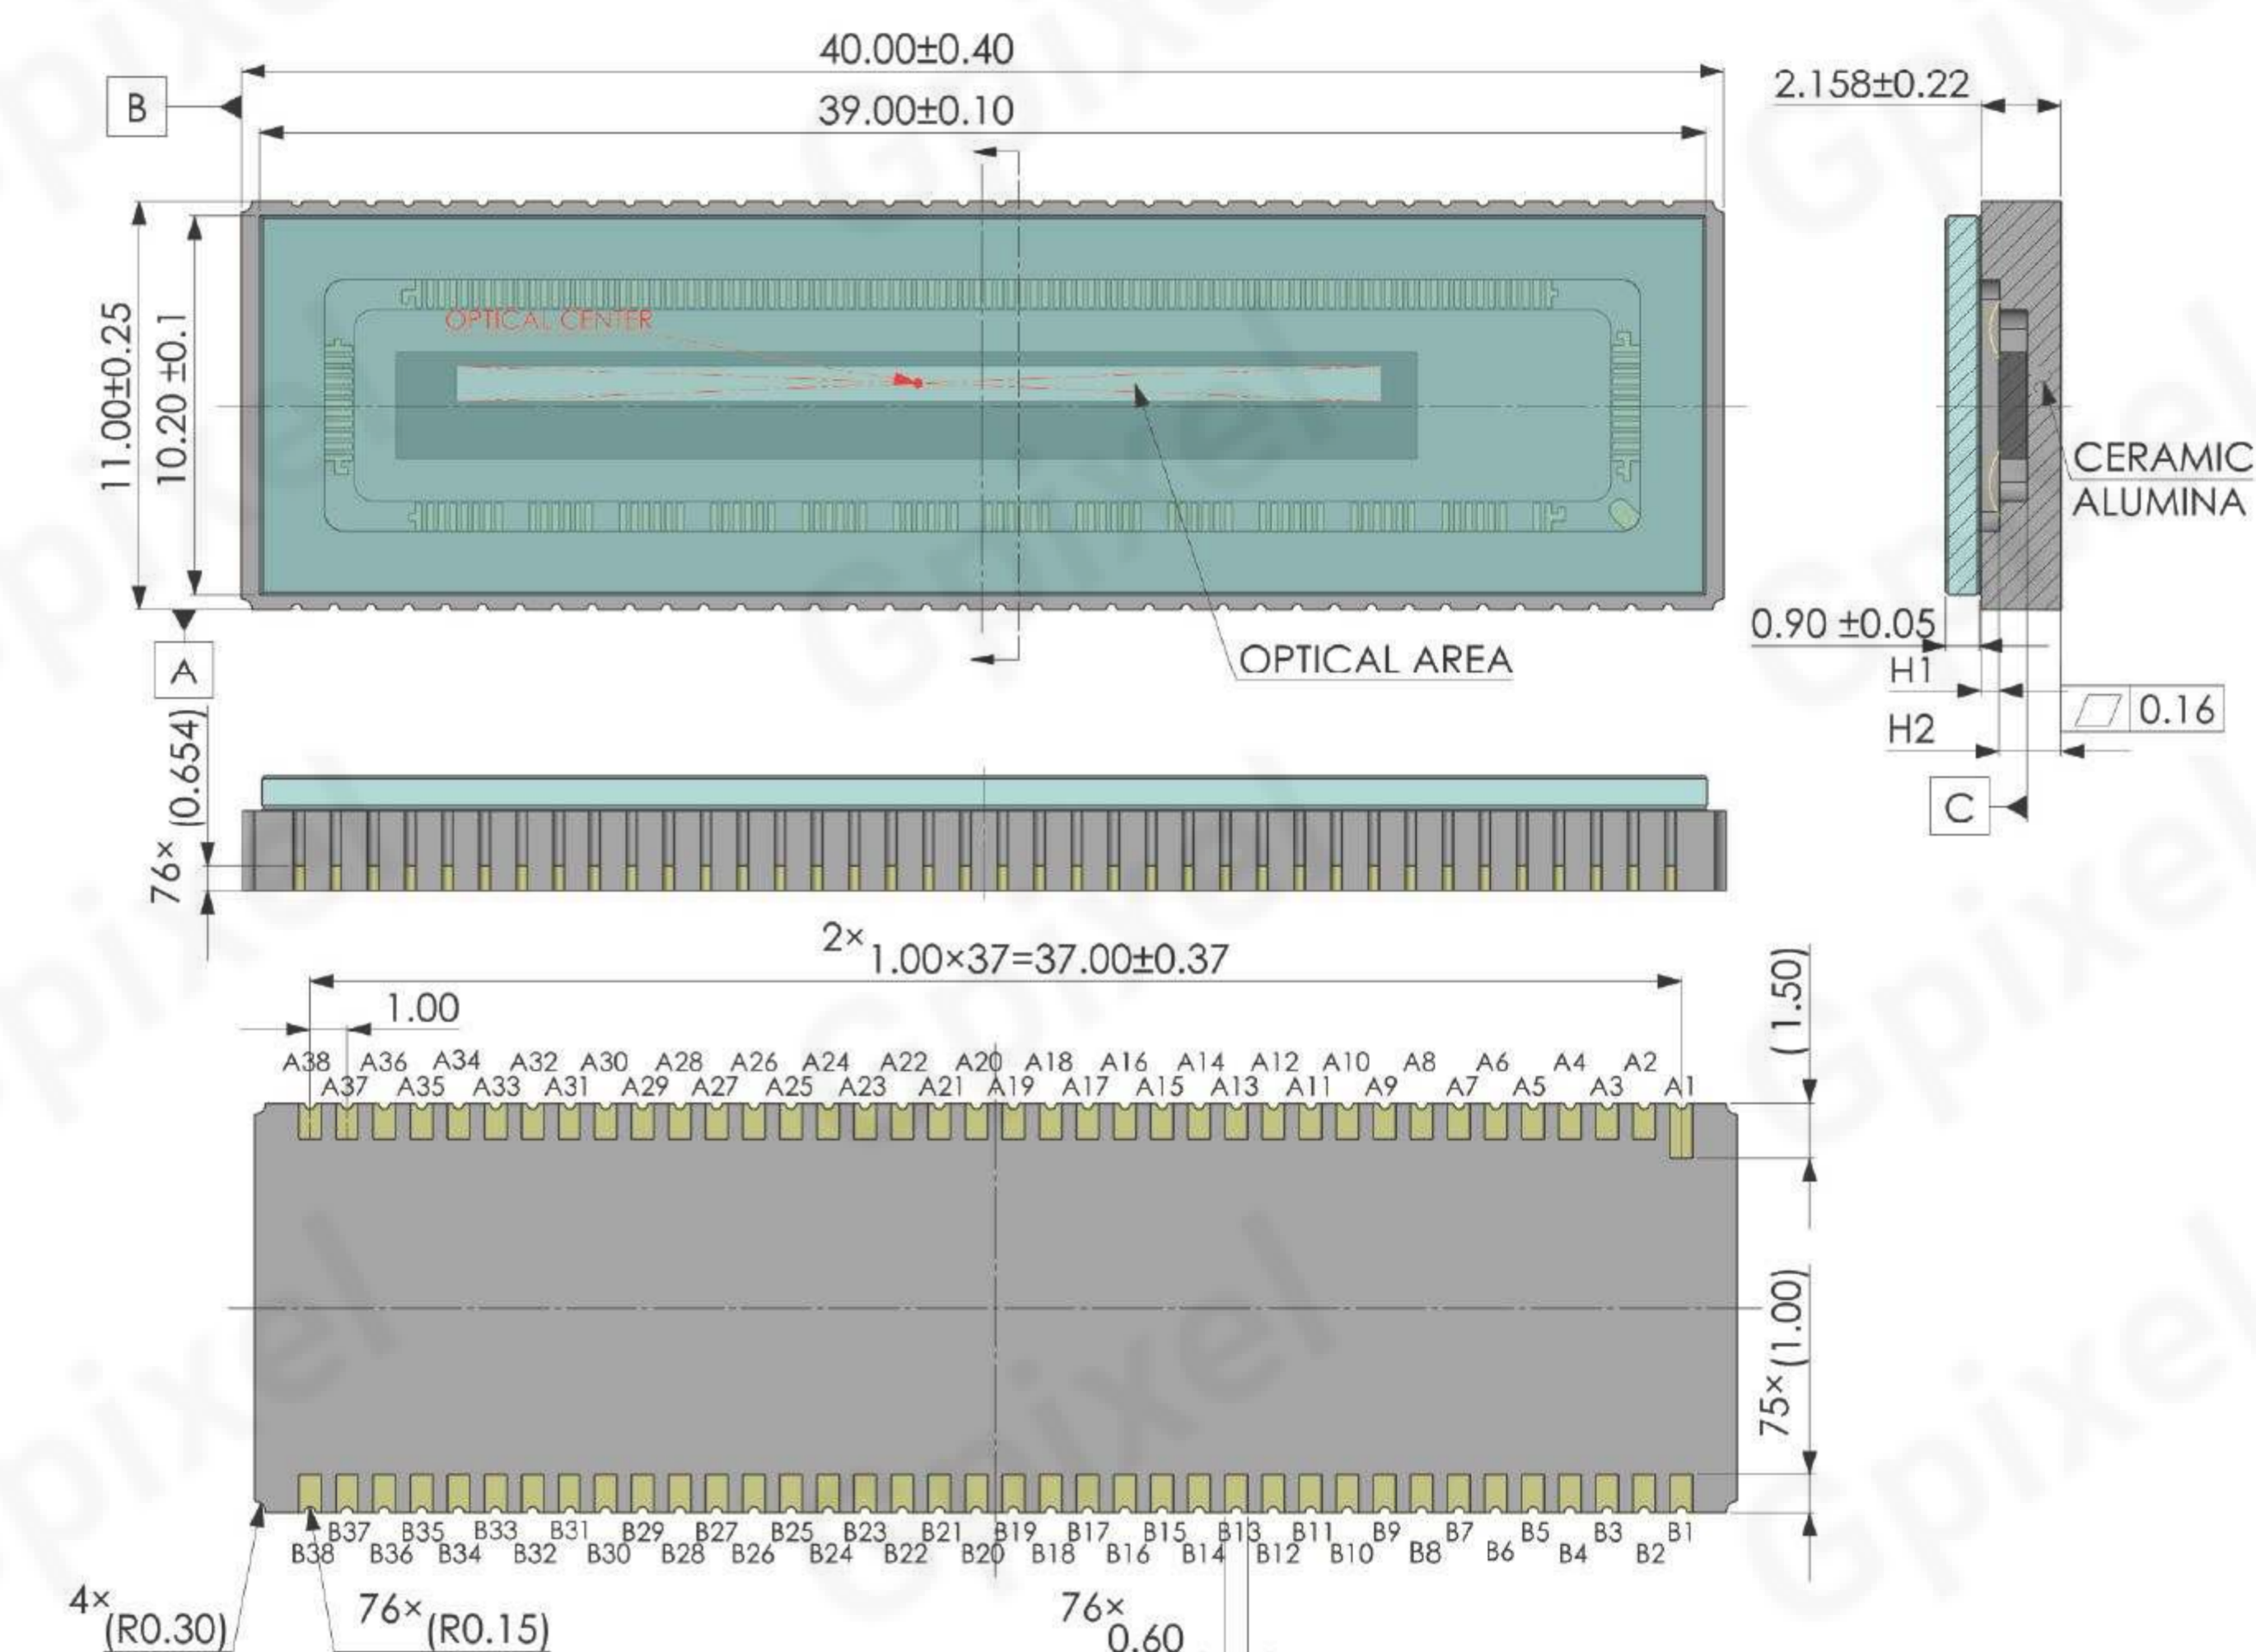

# GLR1402BSI-M

## 2K BSI LINE SCAN CMOS IMAGE SENSOR

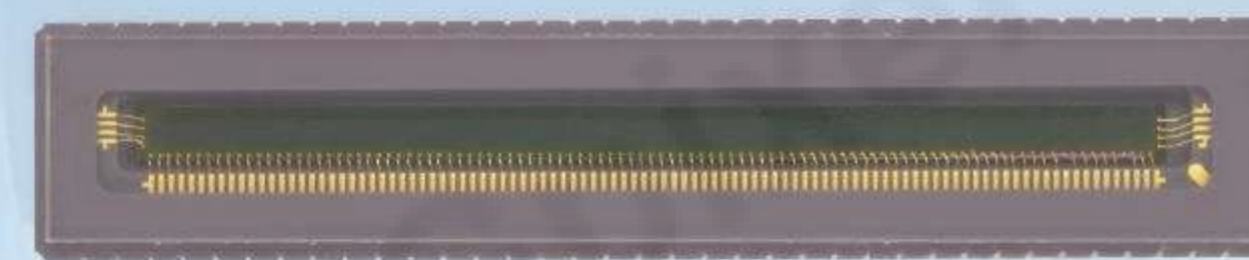

GLR1402BSI-M is a single-line linear sensor image sensor with rectangular pixels designed for spectroscopy, OCT, encoder and various other image reading applications.

GLR1402BSI-M has 2048 pixels in 1 row, with a pixel size of 14 μm x 350 μm, yielding an impressive max. 176 ke<sup>-</sup> full well capacity and boasting a mere 3.1 e<sup>-</sup> of noise.

Data is read out at 14 bits per pixel with 80 dB of dynamic range, or by combining two 12 bit pixel reads, high and low gain, to achieve a maximum dynamic range of 95.1 dB. GLR1402BSI-M supports both sLVDS and CMOS data outputs, customer can switch different data channels with 12 bit / 14 bit based on demand.

### Key Features and Benefits


- Back Side Illuminated (BSI) Pixels
- High Sensitivity
- High Speed: up to 29 kHz
- Dual Gain HDR
- UV Version QE 70.4% (280 nm)
- 12/14 bit ADC

### Application

- Spectroscopy


Specifications			
Nr of Active Pixels	2048(H) x 1(V)	Optical Format	28.672 mm
Pixel Size	14 μm x 350 μm	Shutter Type	Global Shutter
Peak QE	90.7% (420 nm)	Temporal Noise	3.1 e <sup>-</sup> (HDR HG), 44.7 e <sup>-</sup> (STD HG)
Full Well Capacity	176 ke <sup>-</sup>	Max. SNR	52 dB
Dynamic Range	95.1 dB	Max Line Rate	29 kHz
Output Format	4 ch Sub-LVDS, CMOS parallel output	Channel Multiplexing	Sub-LVDS 4/2/1
ADC	12/14 bit	Max. Data Rate	2.4 Gbps (Sub-LVDS), 600 Mbps (CMOS)
Chroma	Mono	Power Consumption	< 350 mW
Power Consumption	3.6 V (Analog), 1.8 V-3.3 V (IO), 1.5 V (Digital)	Package	CLCC 72 pins with quartz glass lid (38.0 mm x 7.4 mm)

### Package Drawing

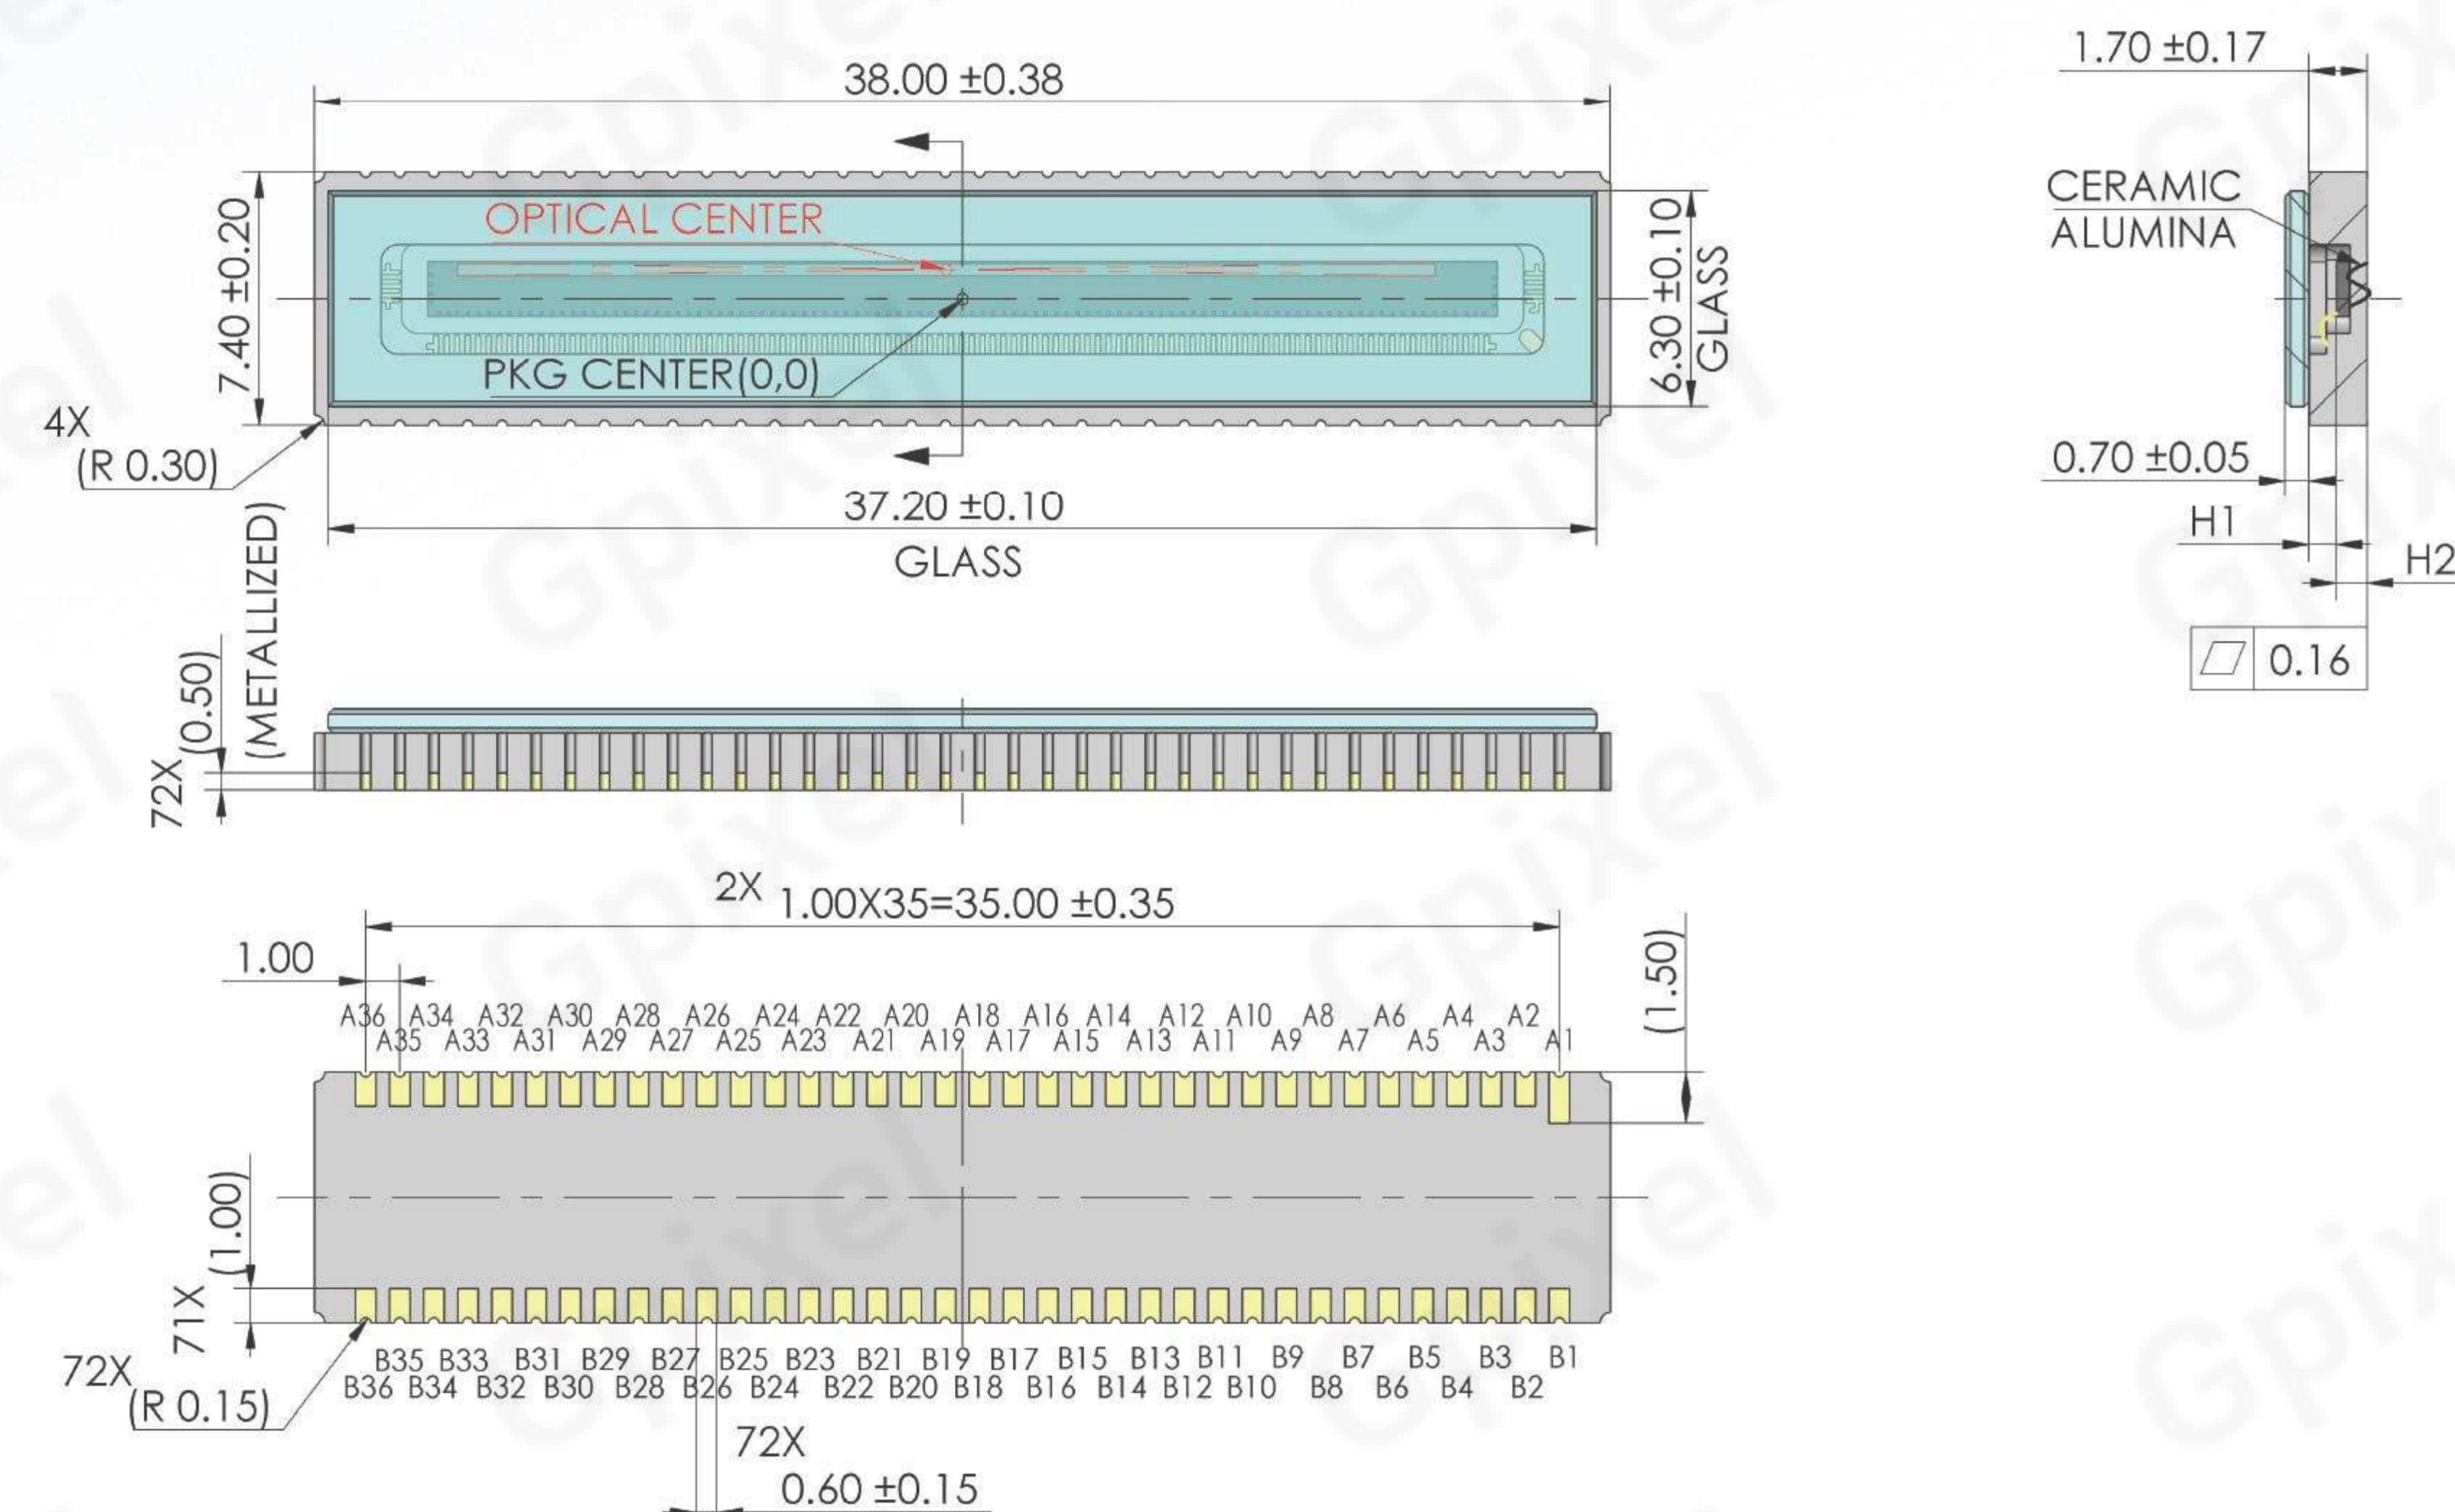

# GL1402

## 2K LINE SCAN CMOS IMAGE SENSOR

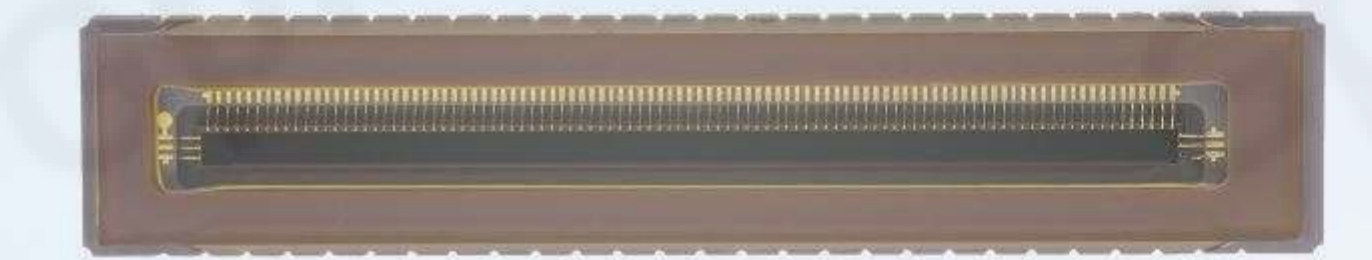

GL1402 is available in color and mono variants. GL1402 color features red, green, and blue rows with 14 μm gaps between each row to minimize color crosstalk. Readout speed is 27 kHz. GL1402 mono features a three row monochrome option with a readout speed of 27 kHz, or a one row monochrome option with a readout speed of 81 kHz.

GL1402 has a 28.7 ke<sup>-</sup> full well capacity and a dynamic range of 70 dB. The sensor has a 12 bit ADC and 4 sLVDS channels, with the option to run slower at 2 or 1 sLVDS channel.

GL1402 power consumption is less than 420 mW at maximum readout speed. The sensor is assembled into a 54 pins CLCC package with outer dimensions 38 x 7.4 mm.

### Key Features and Benefits


- Cost Efficient
- High Frame Rate
- Low Power Consumption
- High Dynamic Range

### Application


- Grain Sorting
- Tomography (OCT)

Specifications			
Nr of Active Pixels	2048(H) x 1(V), 2048(H) x 3(V)	Optical Format	28.896 mm
Pixel Size	14 μm x 14 μm	Shutter Type	Global Shutter
Peak QE	69.3% (560 nm)	Temporal Noise	9.1 e <sup>-</sup>
Full Well Capacity	28.7 ke <sup>-</sup>	Angular Response	20° (85% Response)
Dynamic Range	69.9 dB	Max Line Rate	81 kHz ((single line)
Output Format	4 ch Sub-LVDS	Channel Multiplexing	4/2/1
ADC	12 bit	Max. Data Rate	2.08 Gbps
Chroma	Mono, RGB color	Power Consumption	< 0.42 W
Supply Voltage	3.6 V (analog), 1.8 V-3.3 V (IO), 1.5 V (digital)	Package	54 pins CLCC (38.0 mm x 7.4 mm)

### Package Drawing

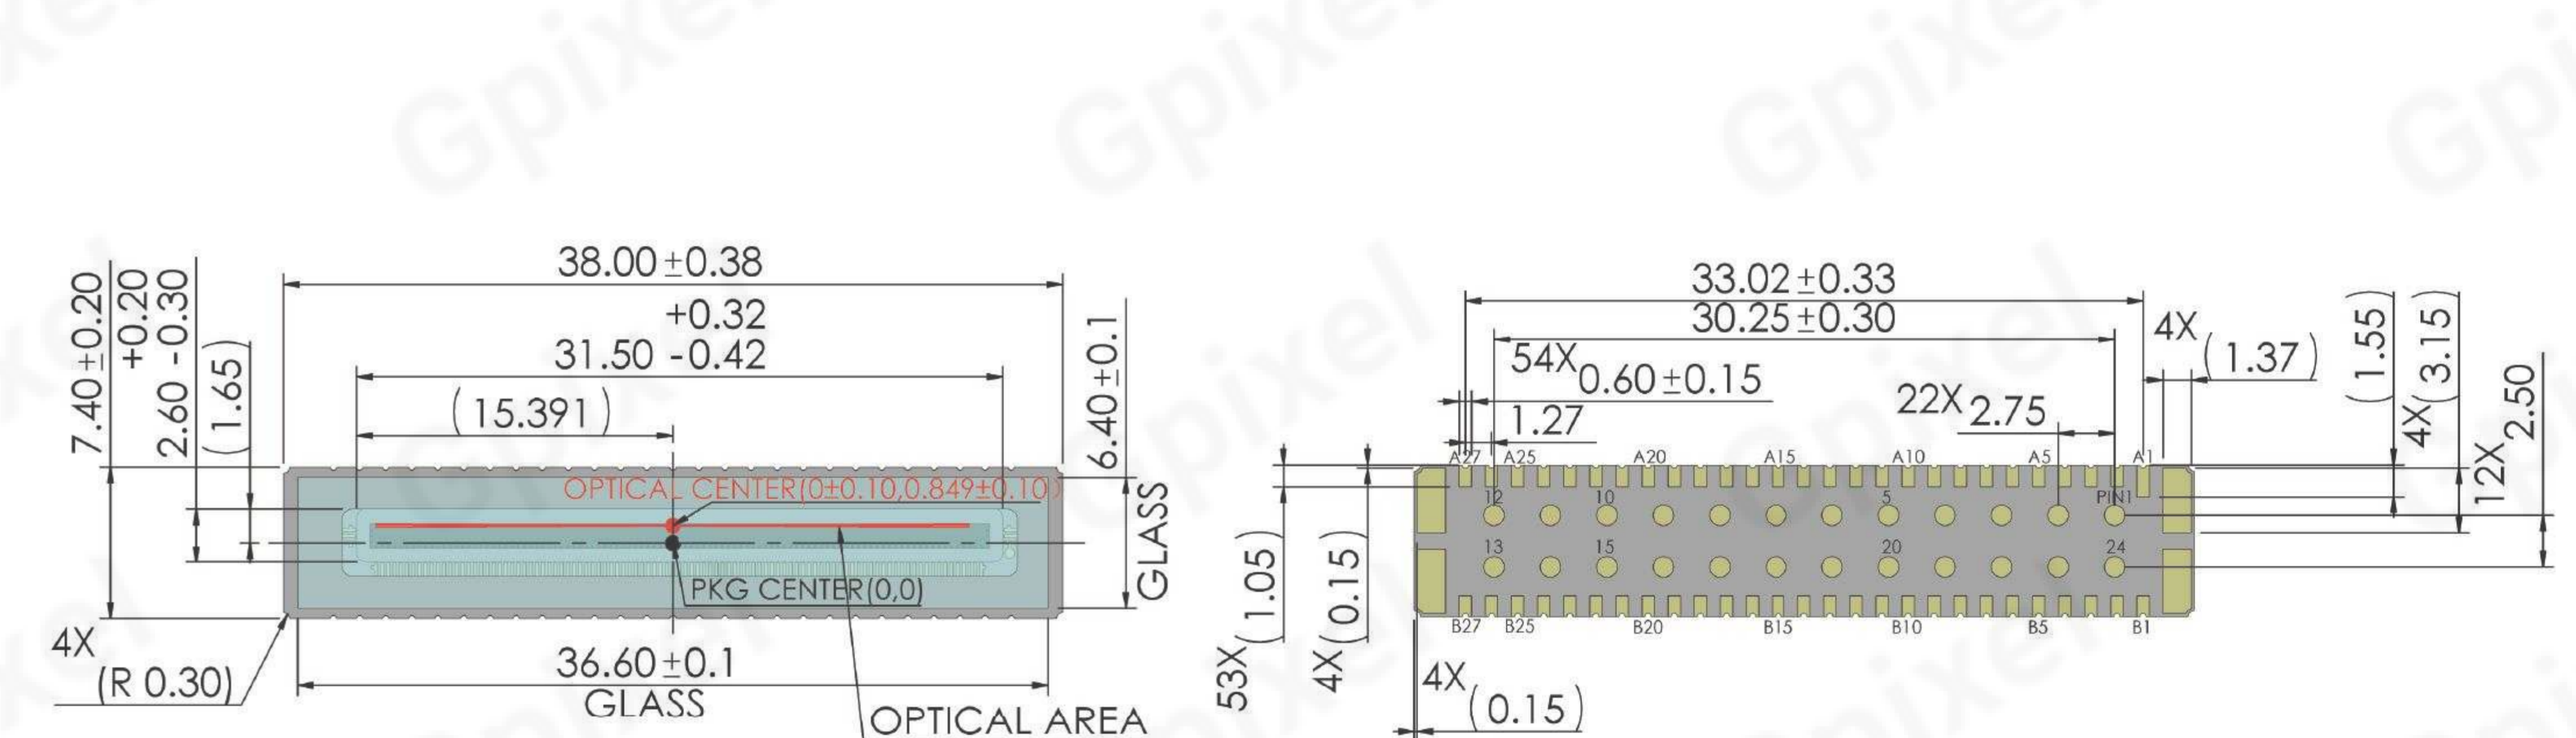

# GLR1002BSI-S

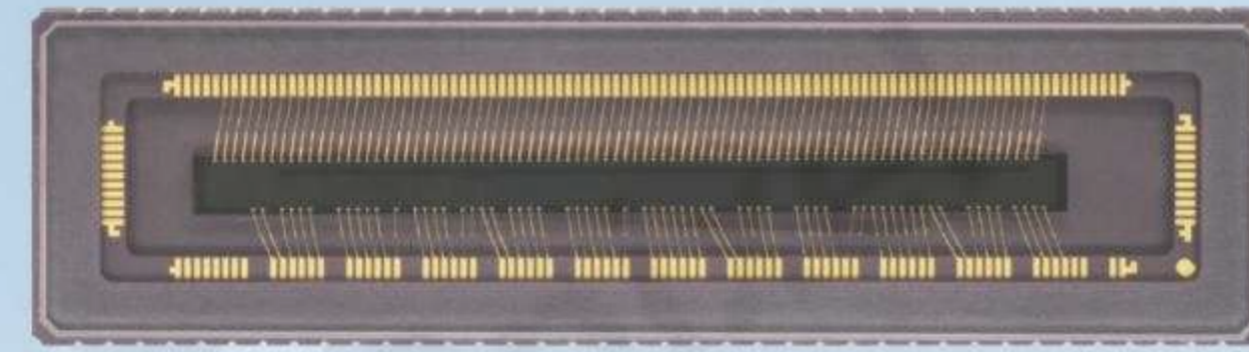

## 2K HIGH SPEED BSI LINE SCAN CMOS IMAGE SENSOR

**GLR1002BSI-S** is a next-generation 2K back-side-illuminated (BSI) CMOS line-scan sensor designed to elevate performance in OCT and spectroscopy applications, combining high-speed readout up to 250 kHz with a rectangular 10 × 200 μm pixel optimized for precise optical alignment. Its advanced BSI global-shutter architecture delivers 58% QE at 850 nm, a 155 ke<sup>-</sup> full-well capacity, low read noise, and true 12 /14 bit output, enabling wide dynamic range and high-contrast fringe reconstruction. High line rates are supported through 1.2 GHz Sub-LVDS outputs with < 450 mW power consumption, providing an efficient balance of speed and system integration. Engineered for both high-throughput imaging and demanding diagnostic workflows, the GLR1002BSI-S is housed in a robust ceramic CLCC package with a double-sided AR-coated glass lid and a compact 40 mm × 11 mm footprint, ensuring stable mechanical integration and excellent alignment in OCT optical paths.

### Key Features and Benefits


- Pixel Size: 10 μm x 200 μm
- High NIR QE
- Fast Line Rate: 250 kHz
- 12 bit / 14 bit ADC

### Application


- Optical Coherence Tomography (OCT)
- In-Vivo Medical Endoscopy
- Non-Destructive Industrial Inspection
- Spectroscopy

Specifications			
<b>Nr of Active Pixels</b>	2411(H) x 1(V)	<b>Optical Format</b>	24.11 mm
<b>Pixel Size</b>	10 μm x 200 μm	<b>Shutter Type</b>	Global Shutter
<b>Peak QE</b>	91 % (440 nm), 58 % (850 nm)	<b>Temporal Noise</b>	33.2 e <sup>-</sup> (12 bit), 20 e <sup>-</sup> (14 bit)
<b>Full Well Capacity</b>	155 ke <sup>-</sup>	<b>Max Line Rate</b>	250/130 kHz (12 bit), 100 kHz (14 bit)
<b>Dynamic Range</b>	73.4 dB (12 bit), 77.6 dB (14 bit)	<b>Max. Data Rate</b>	8.4 Gbps
<b>Output Format</b>	7x Sub-LVDS	<b>ADC</b>	12/14 bit
<b>Chroma</b>	Mono	<b>Power Consumption</b>	< 450 mW
<b>Power Consumption</b>	3.6 V (Analog), 1.8 V-3.3 V (IO), 1.5 V (Digital)	<b>Package</b>	76 x lead CLCC (40 mm x 11 mm)

### Package Drawing

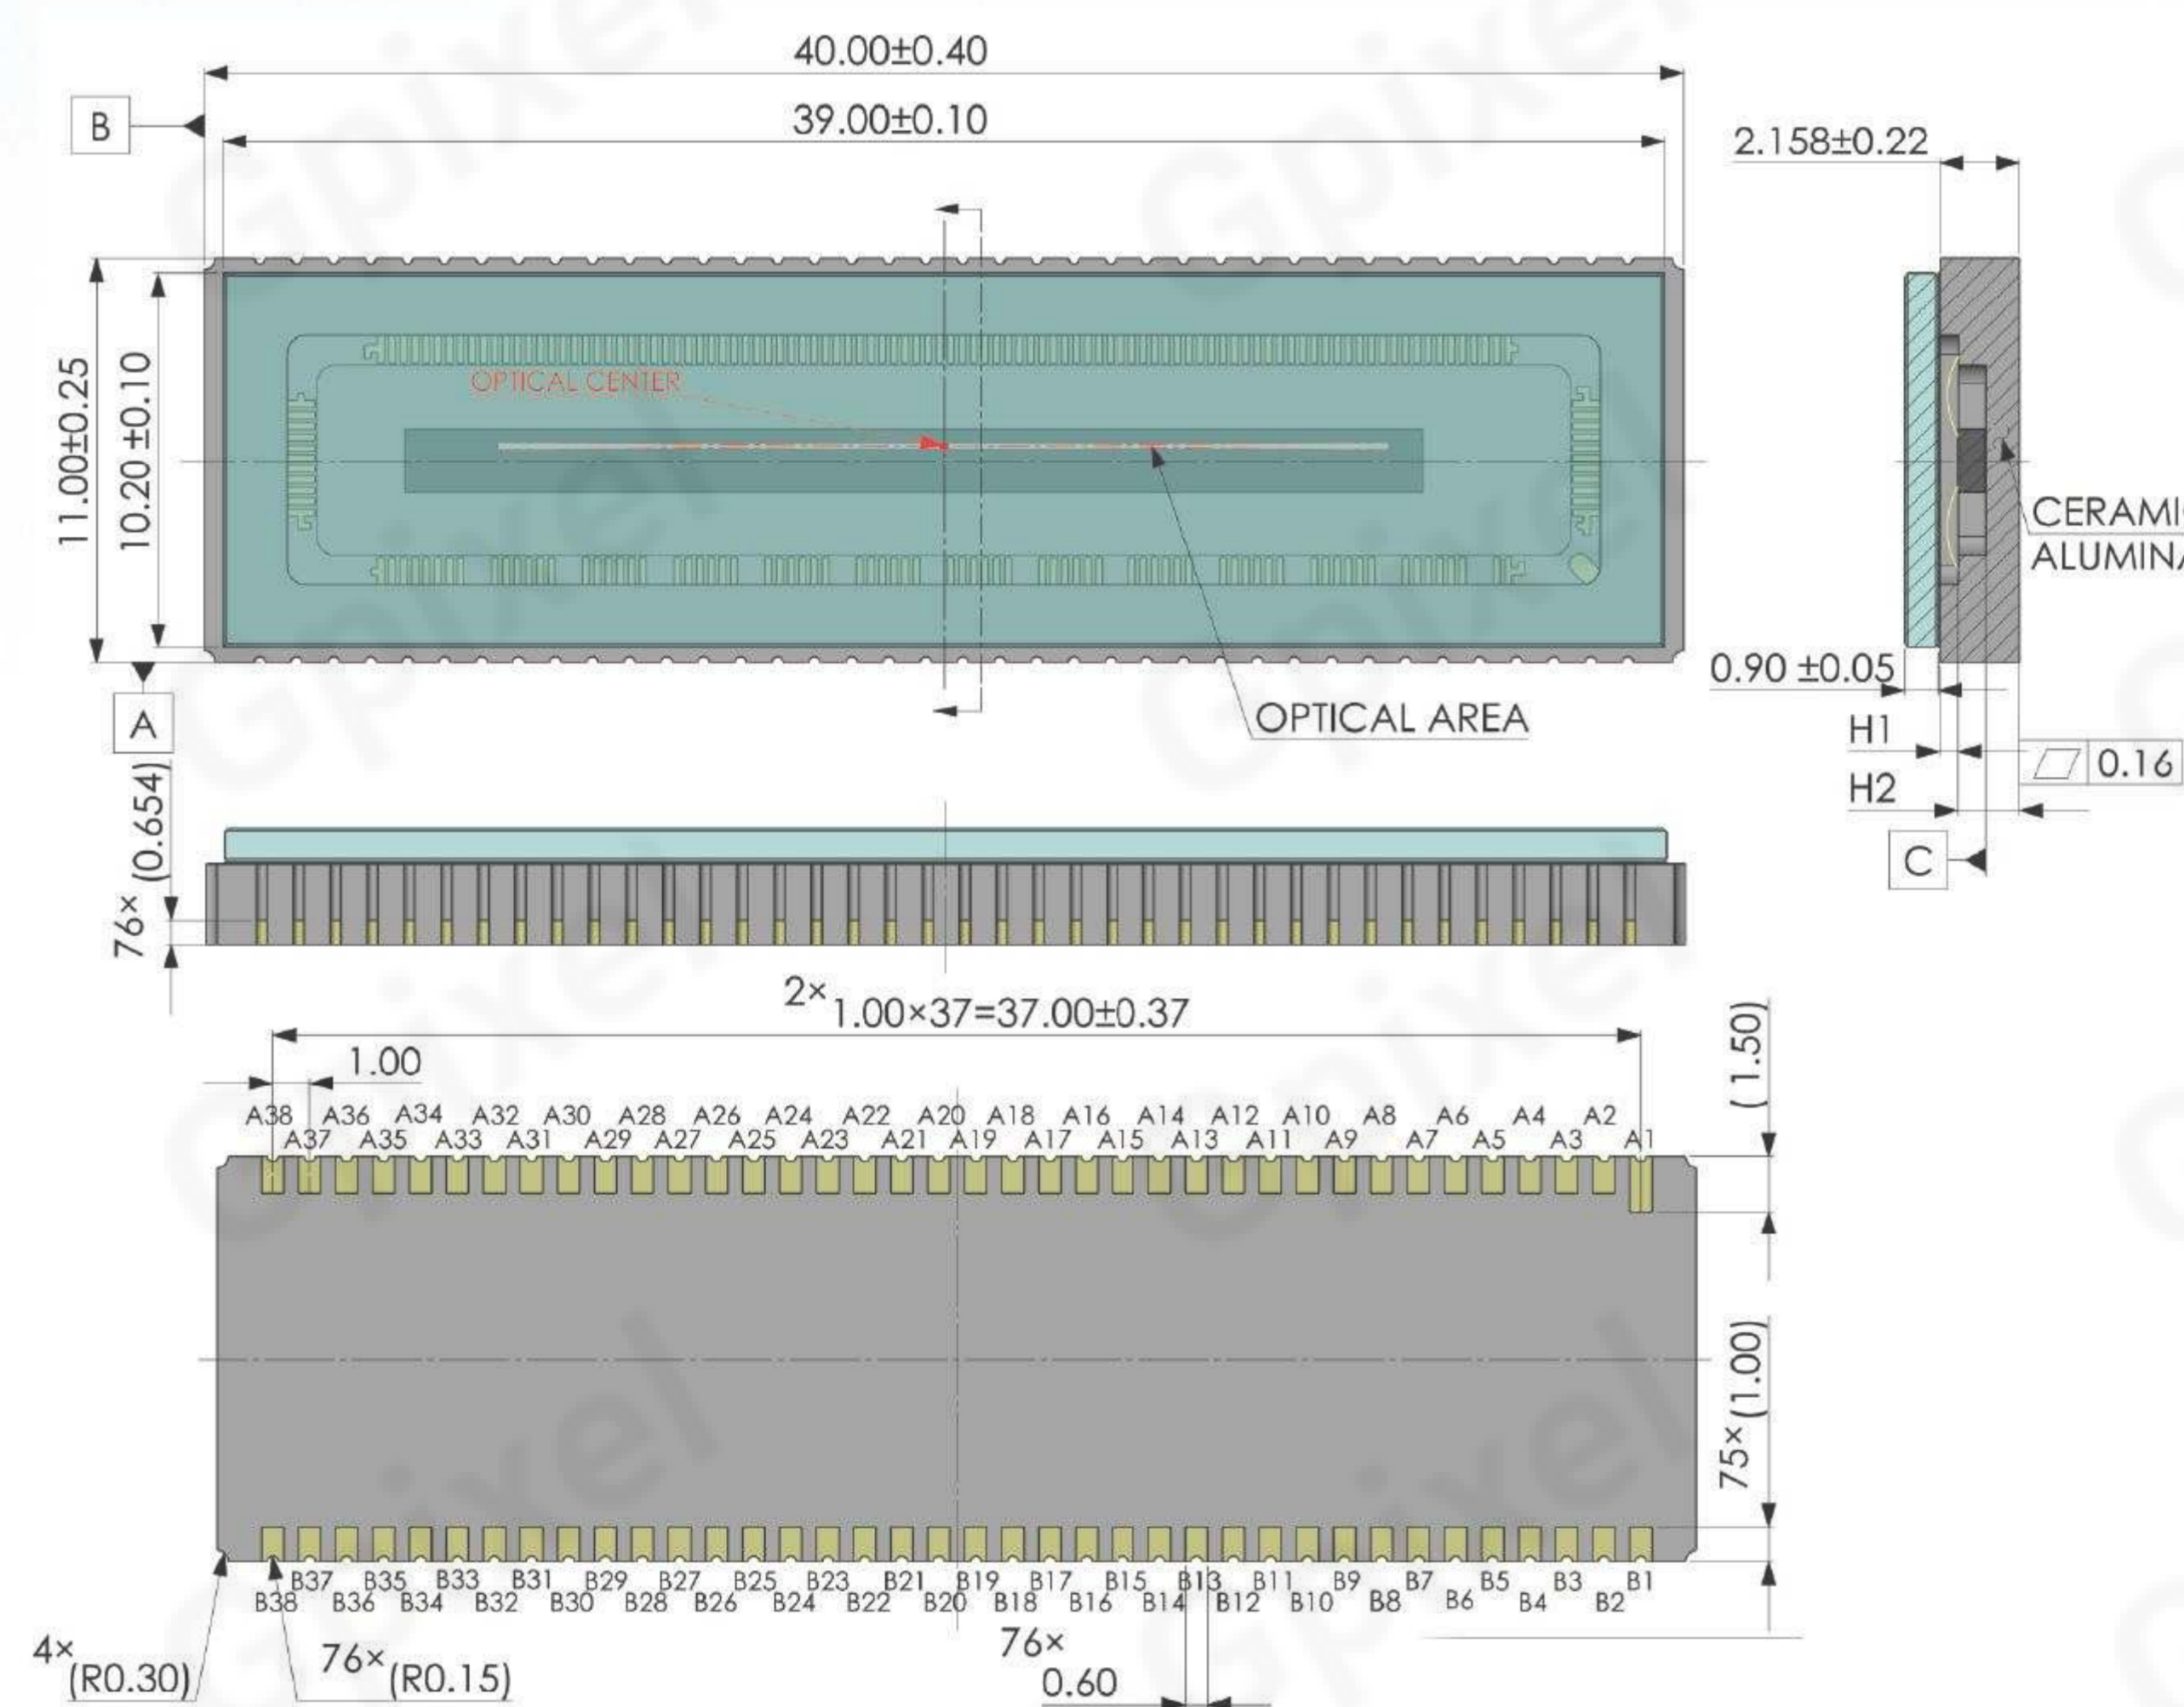

# GL3504

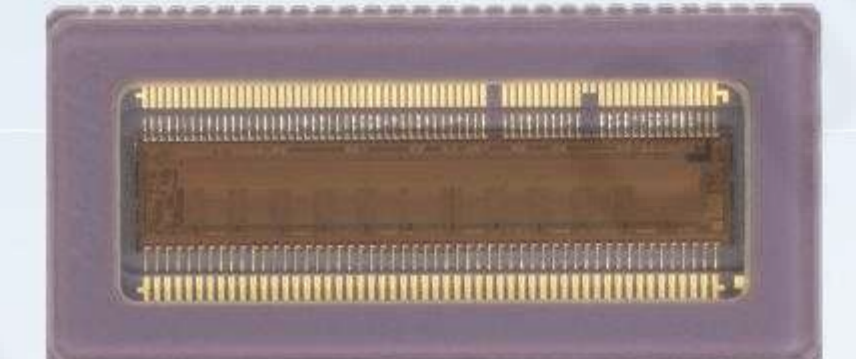

## 2K/4K LINE SCAN CMOS IMAGE SENSOR

**GL3504** is a line scan image sensor suitable for small format camera integration with C mount lens, the sensor contains two lines with 3.5 μm pixel and four lines with 7 μm pixel. GL3504 could run up to 172 kHz with 7 μm pixel line and 84 kHz with 3.5 μm pixel line at 12 bit output with single line readout.

**GL3504** uses on-chip PLL and all required timing is generated by the on-chip sequencer, reducing the amount of external components needed. Output channel multiplexing enables flexibility in FPGA selection. GL3504 enables a cost effective camera solution for demanding inspection applications.

**GL3504** is assembled with a compact 58 pins CLCC package for fast heat dissipation and high robustness. Both mono and color variances are offered. For color variance, 7 μm lines are with RGB true color coating and 3.5 μm lines are with Bayer pattern.

### Key Features and Benefits


- High Speed
- Low Consumption
- High Dynamic Range

### Application

- Automation & Inspection


Specifications			
<b>Nr of Active Pixels</b>	4096(H) x 2(V) (3.5 μm) · 2048(H) x 4(V) (7 μm)	<b>Optical Format</b>	14.336 mm
<b>Pixel Size</b>	3.5 μm x 3.5 μm, 7 μm x 7 μm	<b>Shutter Type</b>	Global Shutter
<b>Peak QE</b>	71.9% (570 nm)	<b>Temporal Noise</b>	4.9 e <sup>-</sup> (3.5 μm, 12 bit)
<b>Full Well Capacity</b>	9.4 ke <sup>-</sup> (3.5 μm, 12 bit)	<b>Angular Response</b>	20° (87% Response)
<b>Dynamic Range</b>	65.8 dB (3.5 μm, 12 bit)	<b>Max Line Rate</b>	172.7 kHz (7 μm, 12 bit, single line)
<b>Output Format</b>	6 ch Sub-LVDS	<b>Channel Multiplexing</b>	6/3/2/1
<b>ADC</b>	8/12 bit	<b>Max. Data Rate</b>	5.472 Gbps
<b>Chroma</b>	Mono, RGB Color	<b>Power Consumption</b>	< 1.0 W
<b>Supply Voltage</b>	3.3 V (analog), 2.5 V-3.3 V (IO), 2.1 V (digital)	<b>Package</b>	CLCC 58 pins (22.3 mm x 10.6 mm)

### Package Drawing

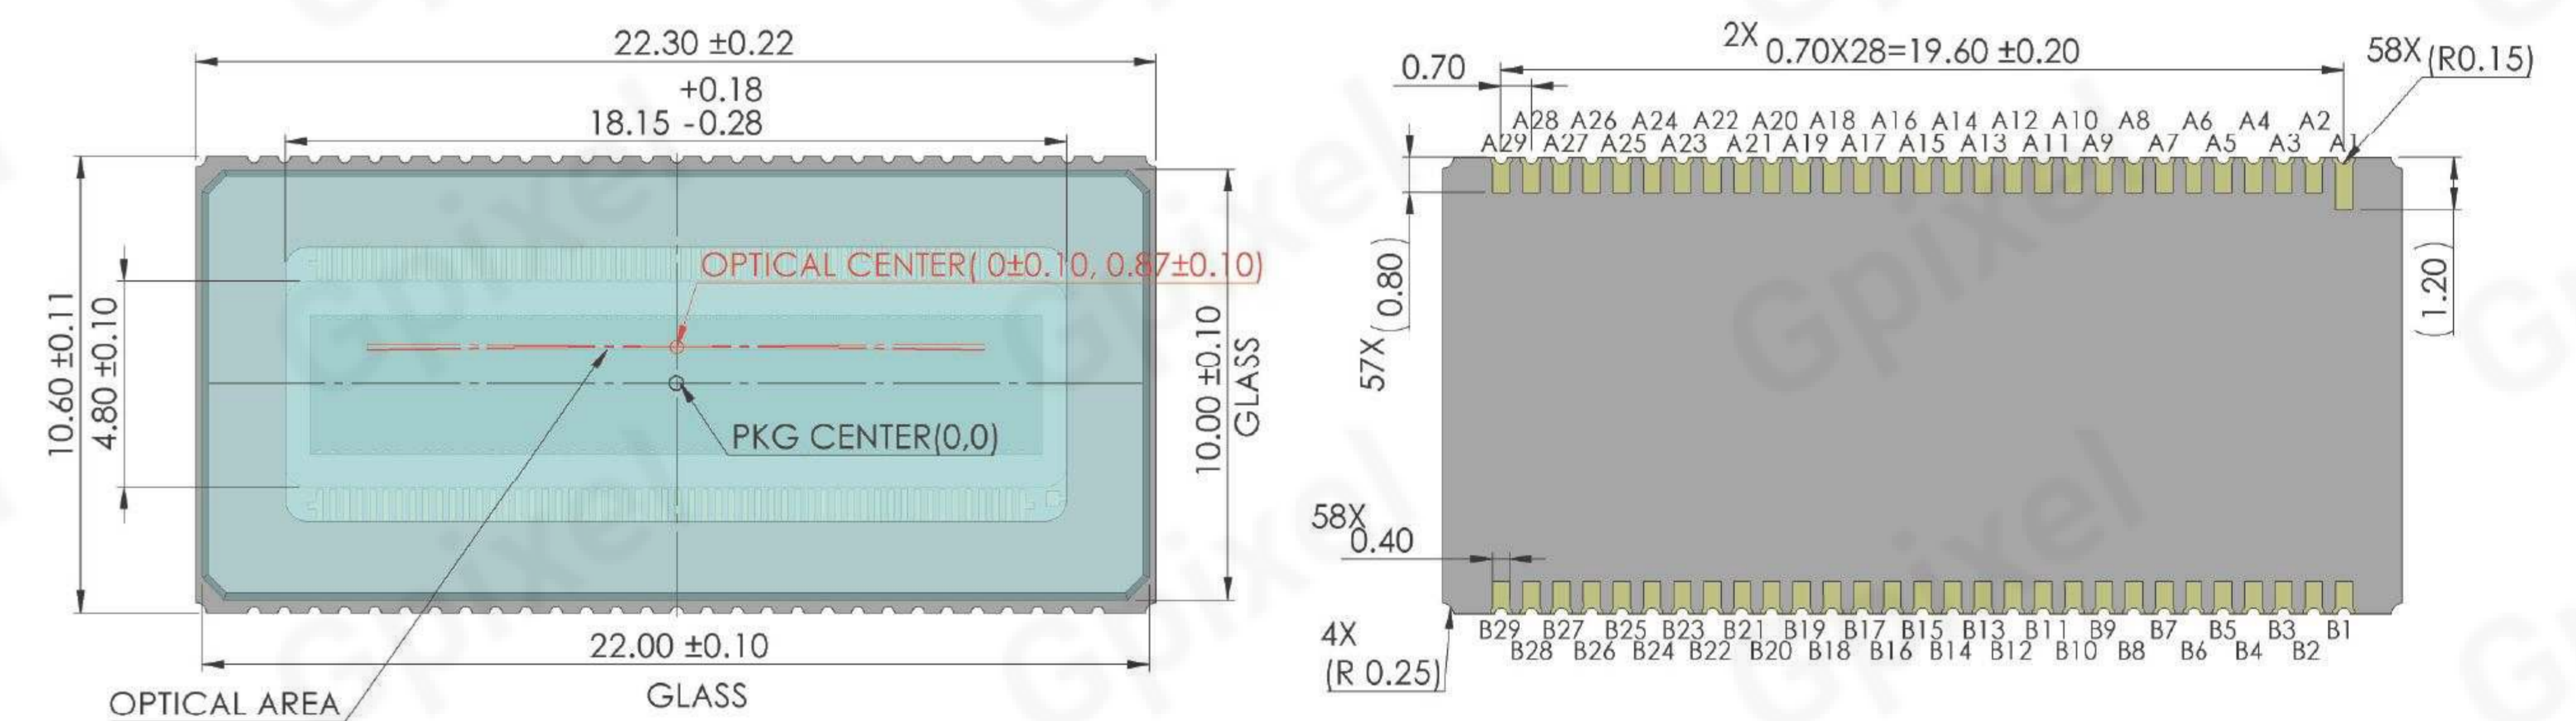

# GL0402

## 4K LINE SCAN CMOS IMAGE SENSOR

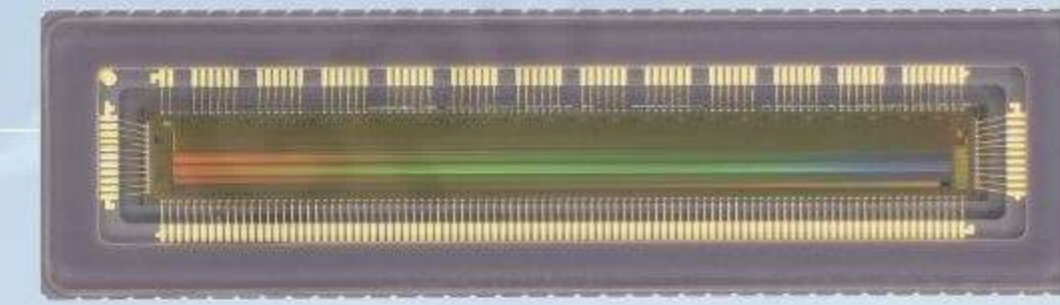

**GL0402** is a 4096 x 2 resolution, 7 μm square pixel, global shutter linear image sensor that supports maximum 200 kHz line rate in single line mode and 100 kHz line rate in dual line mode. GL0402 offers low read noise of less than 5.2 e<sup>-</sup> and 10 ke<sup>-</sup> FWC, leads to 65.6 dB intra-scene dynamic range.

**GL0402** uses external clock and all required timing are generated by on chip sequencer, reducing the amount of external component needed; output channel multiplexing function enables flexibility on FPGA choice, suitable for cost-effective camera solution for demanding on line inspection applications. GL0402 is assembled with compact 76 pins CLCC package for fast heat dissipation and high robustness.

### Key Features and Benefits


- High Speed
- High Dynamic Range
- Low Noise

### Application

- Automation & Inspection


Specifications			
<b>Nr of Active Pixels</b>	4096(H) x 2(V)	<b>Optical Format</b>	28.67 mm
<b>Pixel Size</b>	7 μm x 7 μm	<b>Shutter Type</b>	Global Shutter
<b>Peak QE</b>	75.57% (570 nm)	<b>Temporal Noise</b>	5.2 e <sup>-</sup> (single line,HG)
<b>Full Well Capacity</b>	25 ke <sup>-</sup> (LG),10 ke <sup>-</sup> (HG)	<b>Angular Response</b>	20°(85% Response)
<b>Dynamic Range</b>	65.6 dB (HG)	<b>Max Line Rate</b>	100 kHz (dual line),200 kHz (single line)
<b>Output Format</b>	12 ch Sub-LVDS	<b>Channel Multiplexing</b>	12/6
<b>ADC</b>	12 bit	<b>Max. Data Rate</b>	10.944 Gbps
<b>Chroma</b>	Mono, RGB Color	<b>Power Consumption</b>	<2.25 W
<b>Supply Voltage</b>	3.3 V (analog),1.8 V-3.3 V (IO),2 V (digital)	<b>Package</b>	CLCC 76 pins (40.0 mm x 11.0 mm)

### Package Drawing

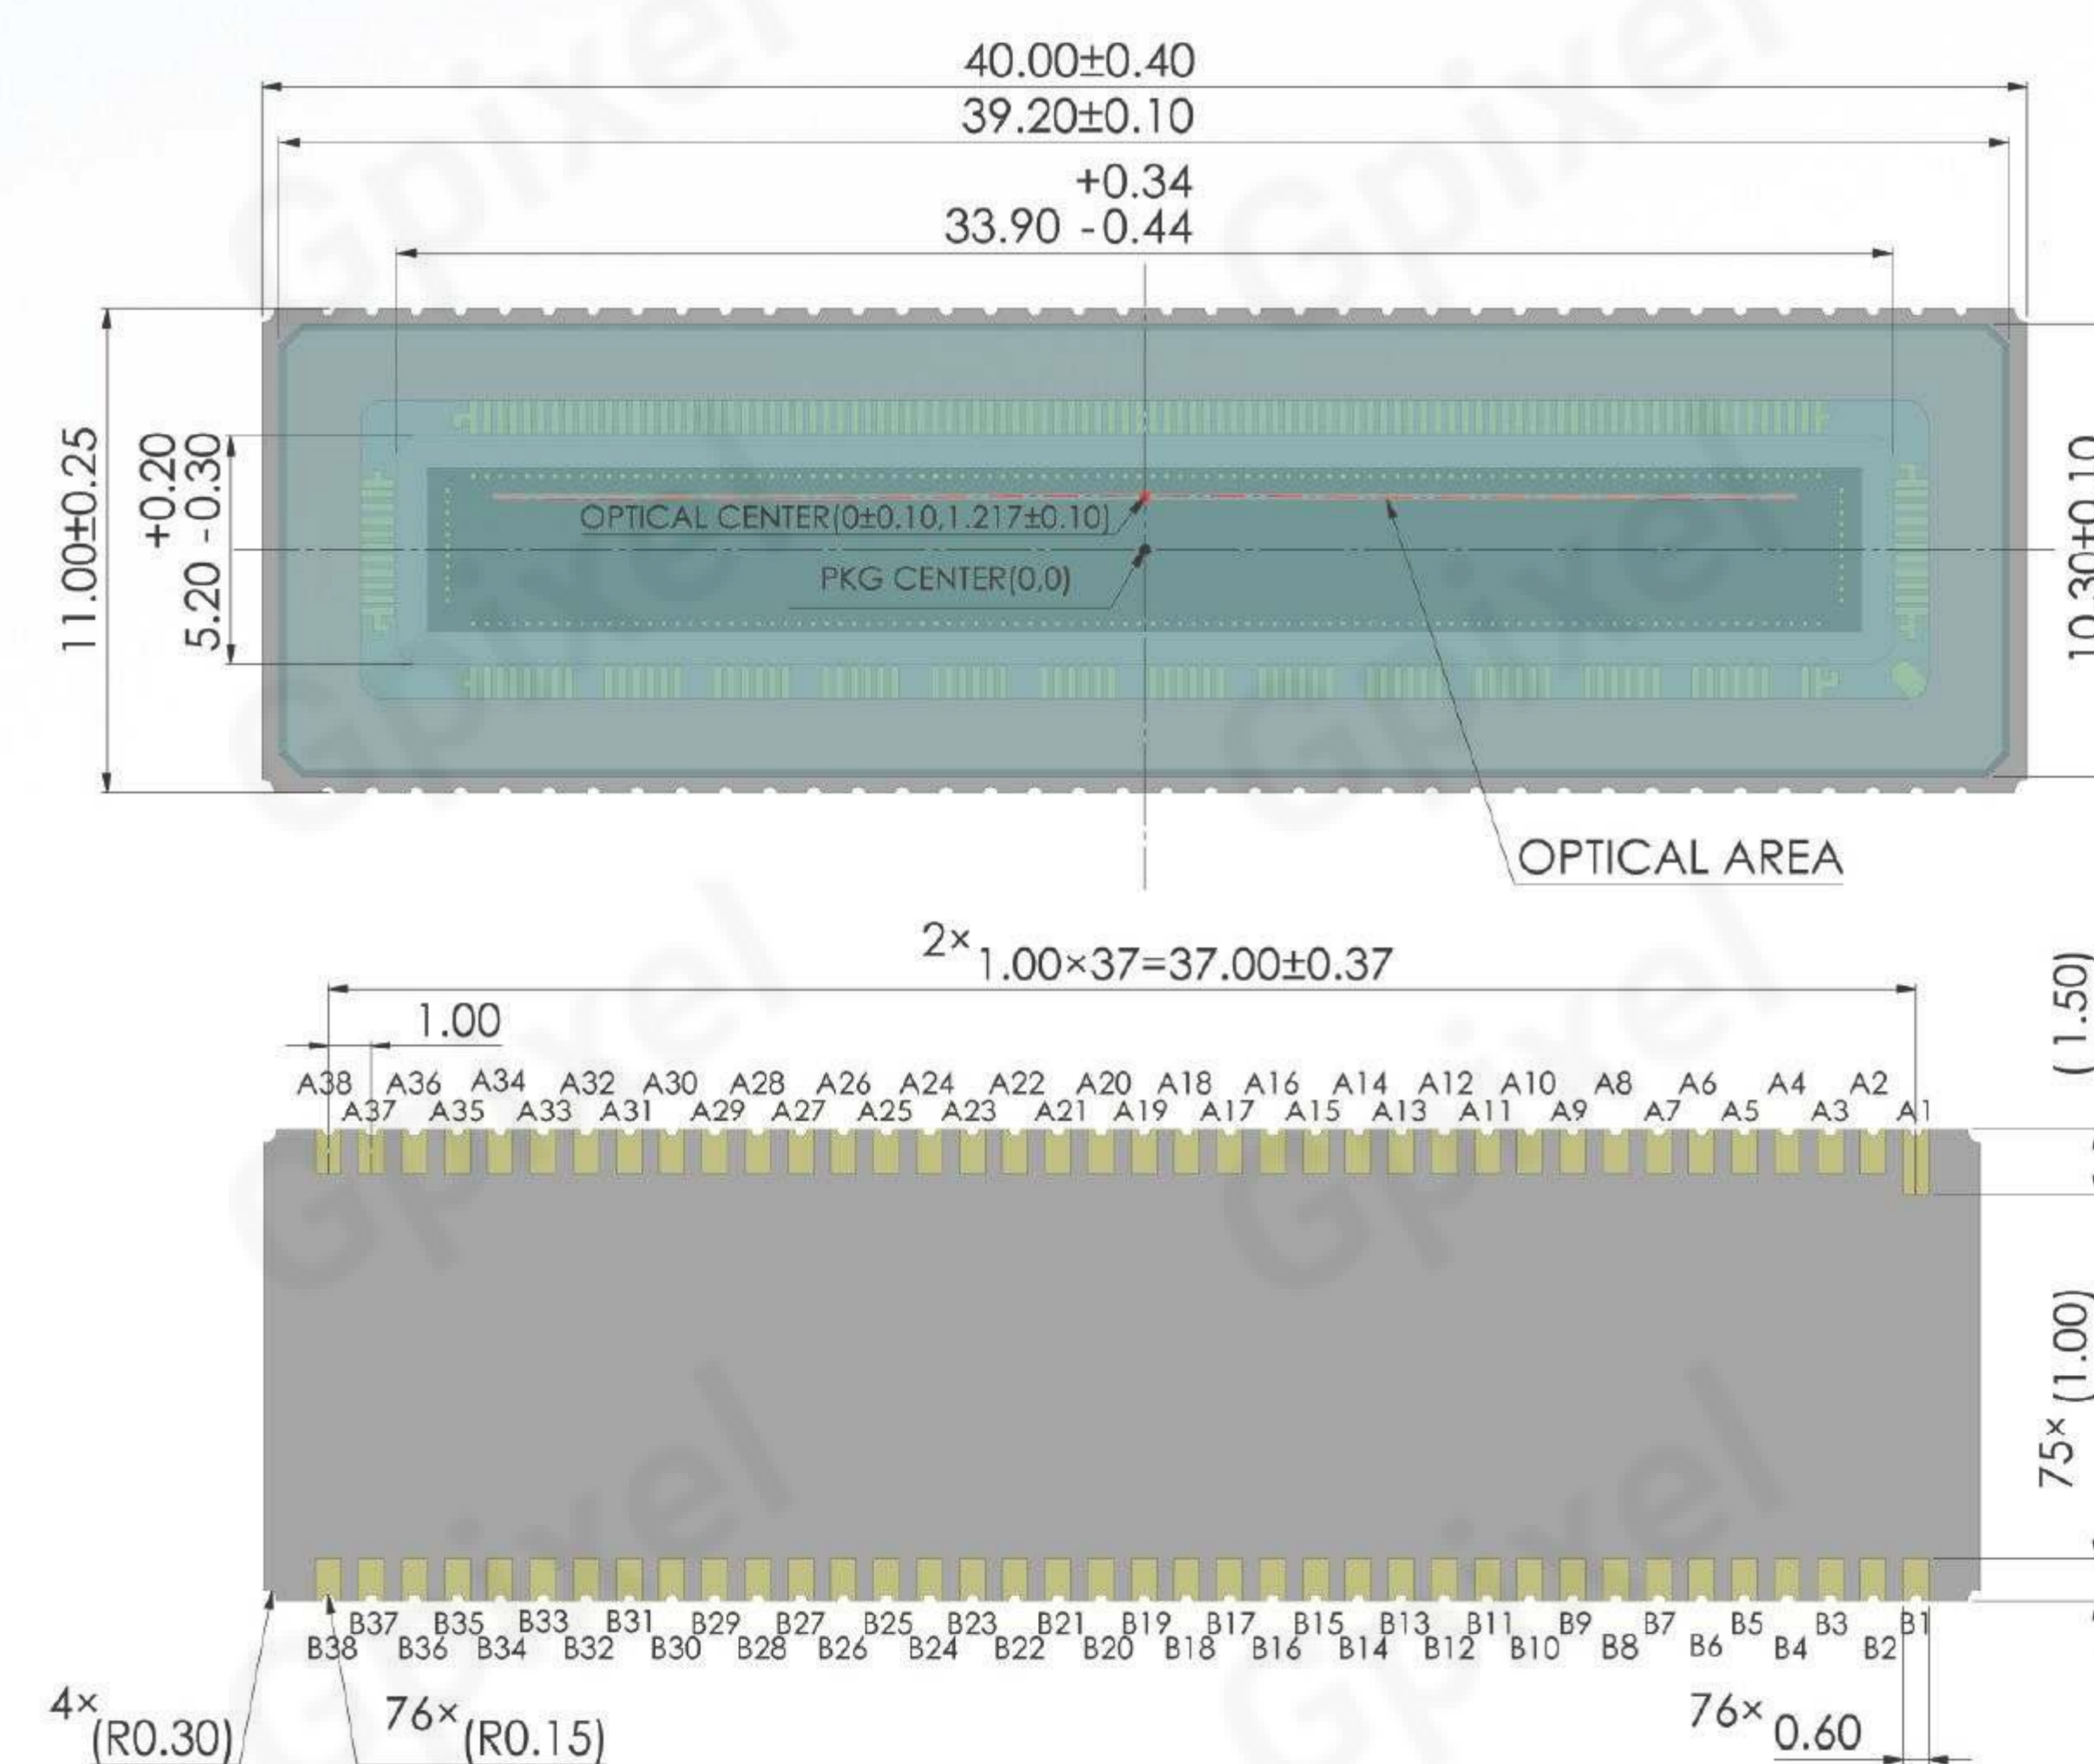

# GL7004

## 4K LINE SCAN CMOS IMAGE SENSOR

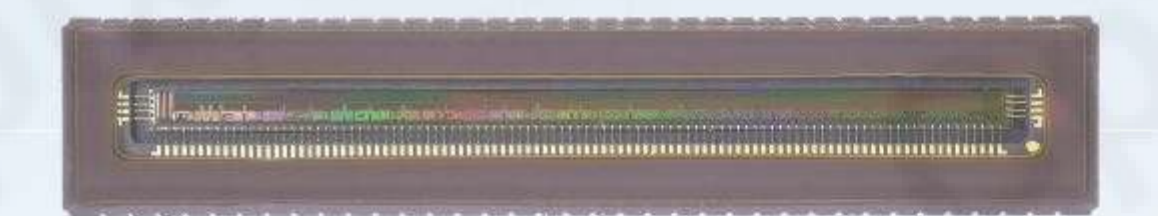

**GL7004** is a 4096 (H) x 4 (V) resolution global shutter linear array CMOS image sensor, featuring 7 μm high-sensitivity pixels. Offered in two basic flavors: a multi color 4 row R+G+B+Mono and 4 row mono variants, the sensor allows each row to have a unique exposure time, with line rates up to 250 kHz in single line mode and 76.9 kHz in quad line mode. The sensor's high line rate is a perfect fit for high-throughput various industrial inspection applications including sorting various inspection applications like solar panel, printing and railway monitoring at a cost-effective price offering.

The GL7004 is available in a compact LCC ceramic package, requiring only 3 external power supplies and consuming only 1.05W, making it easier for customers to design and integrate their systems.

### Key Features and Benefits


- Individual Exposure Control for Each Color Line
- Low Power Consumption
- External Trigger
- Cost Efficient
- High Frame Rate

### Application

- Automation & Inspection
- Logistic & Positioning


Specifications			
<b>Nr of Active Pixels</b>	4096(H) x 4(V)	<b>Optical Format</b>	28.67 mm
<b>Pixel Size</b>	7 μm x 7 μm	<b>Shutter Type</b>	Global Shutter
<b>Peak QE</b>	74.5% (560 nm)	<b>Temporal Noise</b>	4.3 e <sup>-</sup> (10 bit, analog gain 4x)
<b>Full Well Capacity</b>	10.5 ke <sup>-</sup> (10 bit, analog gain 1x)	<b>Dynamic Range</b>	61.5 dB
<b>Output Format</b>	12 ch Sub-LVDS	<b>Max Line Rate</b>	250 kHz (single line)
<b>ADC</b>	10 bit	<b>Max. Data Rate</b>	14.4 Gbps
<b>Chroma</b>	Mono, RGB color	<b>Power Consumption</b>	1.05 W
<b>Supply Voltage</b>	3.6 V (analog),1.8 V-3.3 V (IO),1.5 V (digital)	<b>Package</b>	72 pins CLCC (38.0 mm x 7.4 mm)

### Package Drawing

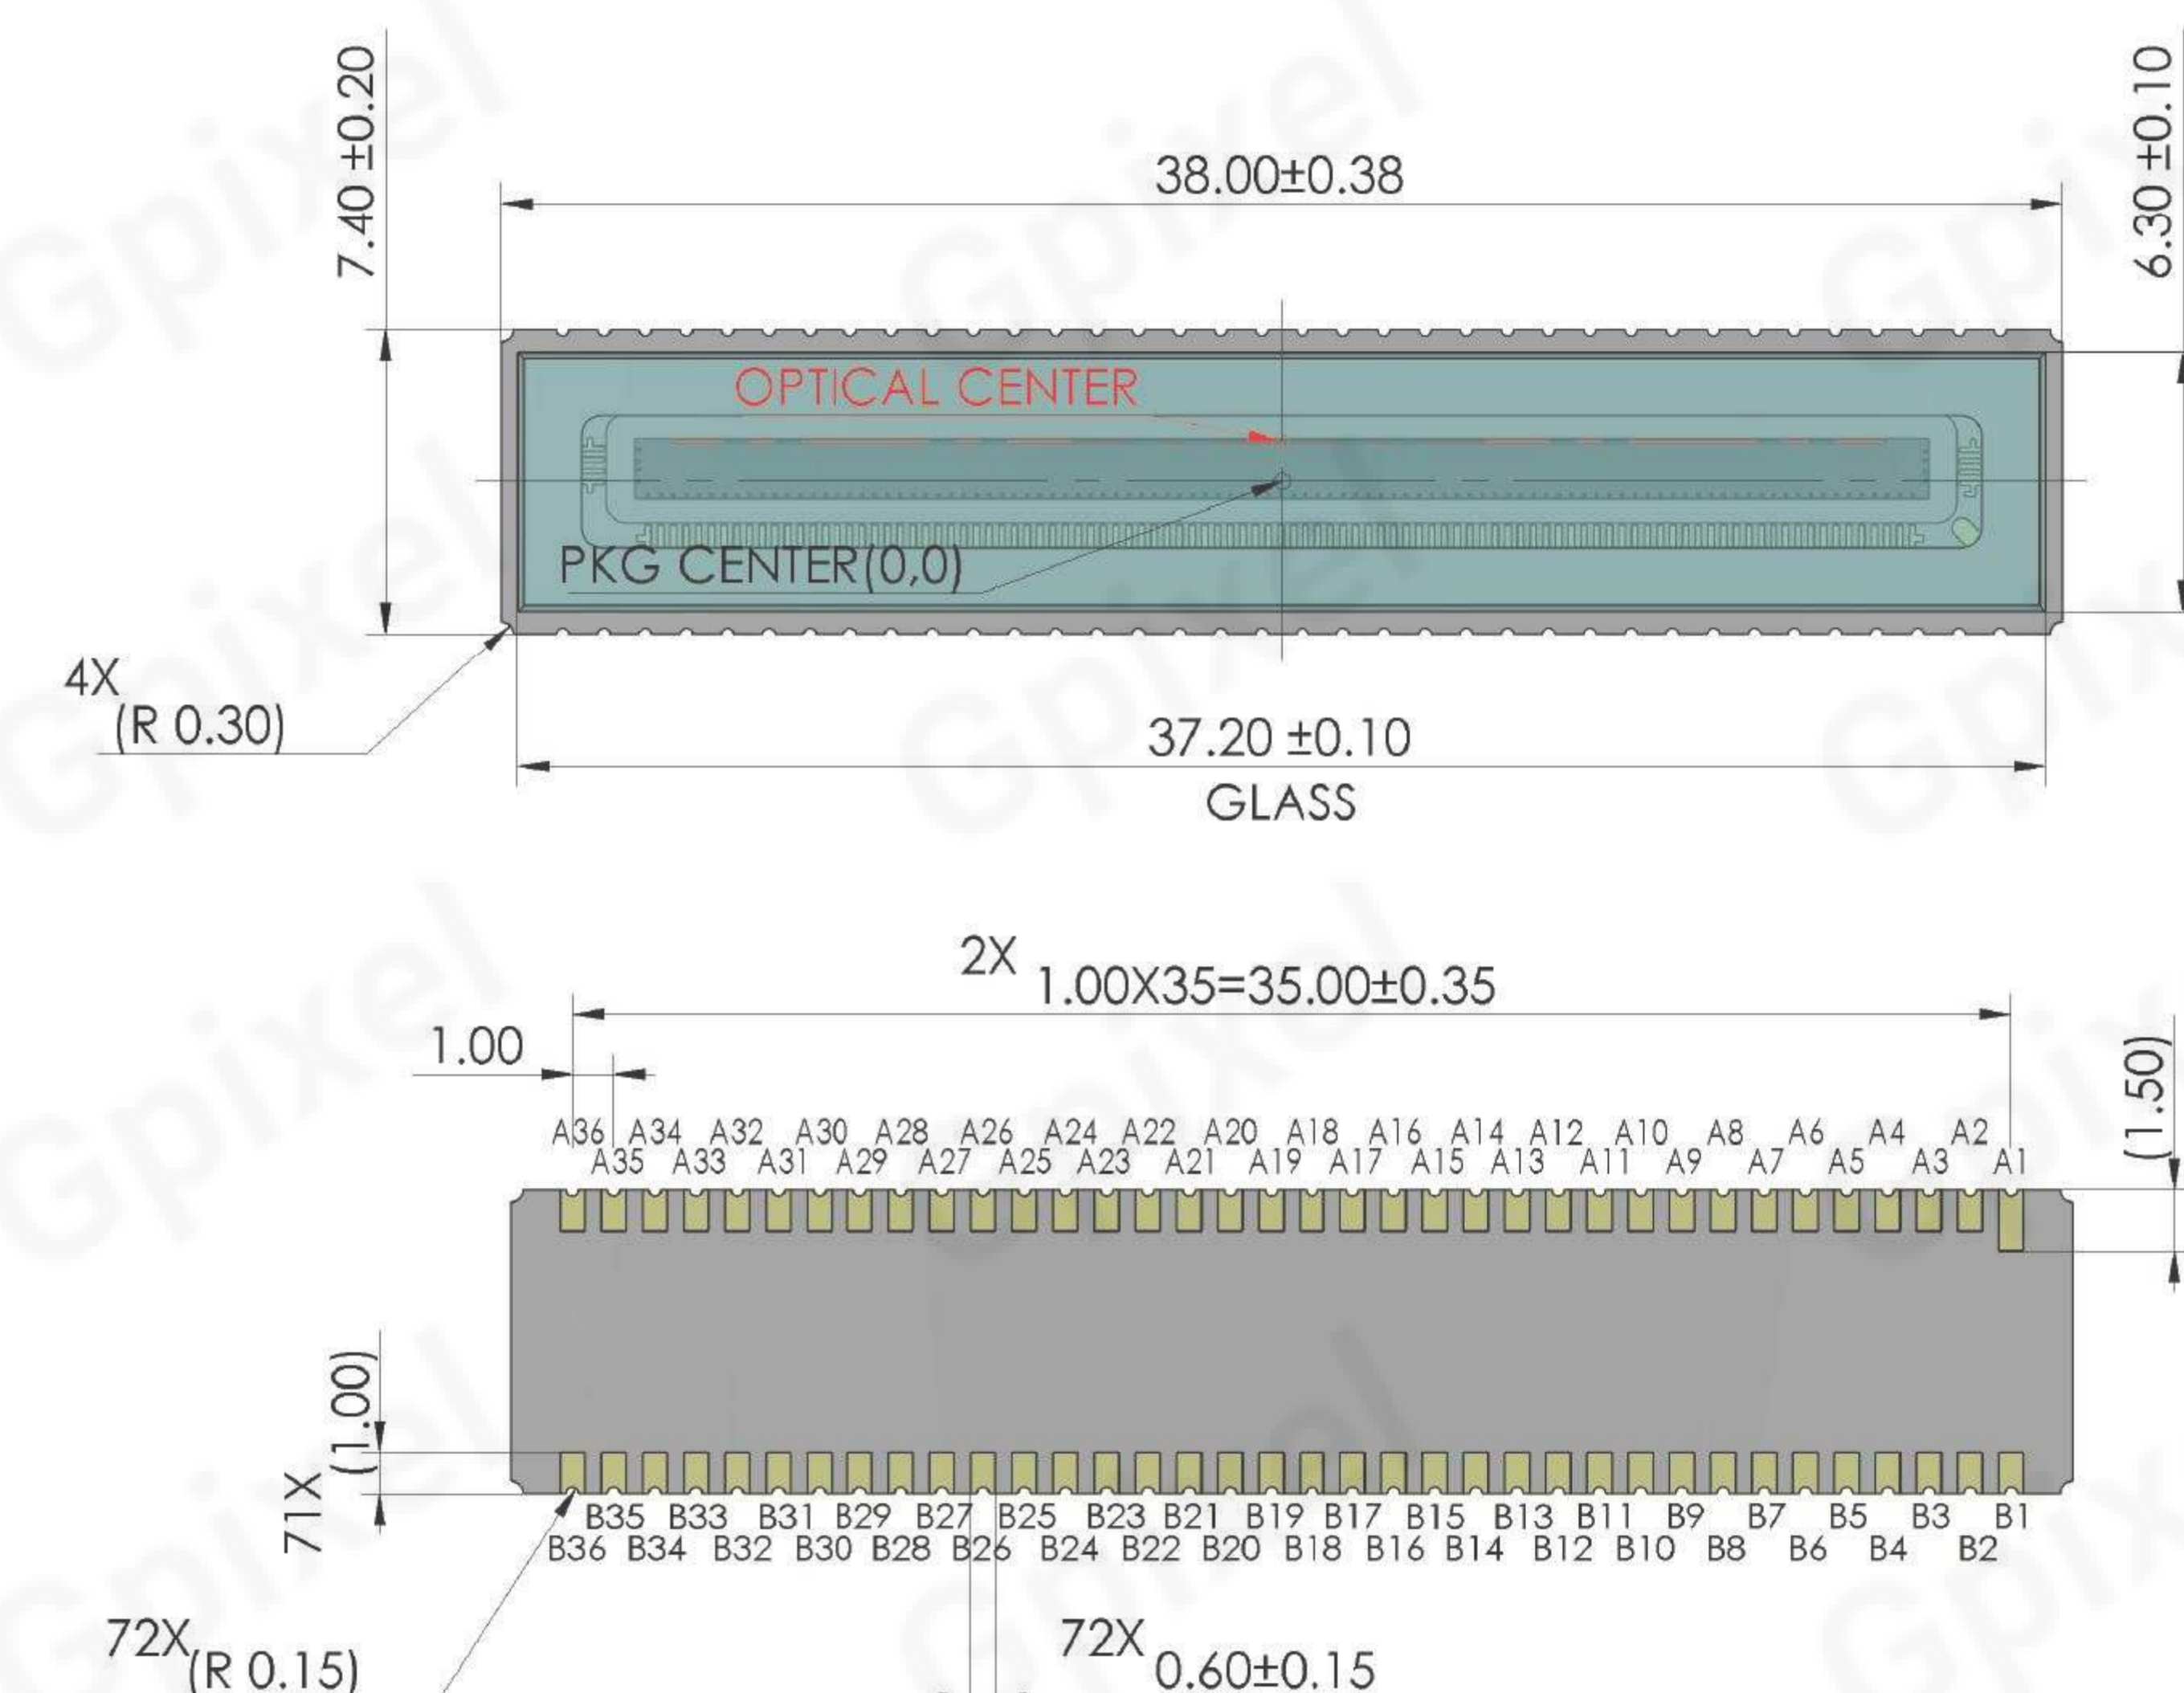

# GL0816

## 8322x16 LINE SCAN CMOS IMAGE SENSOR

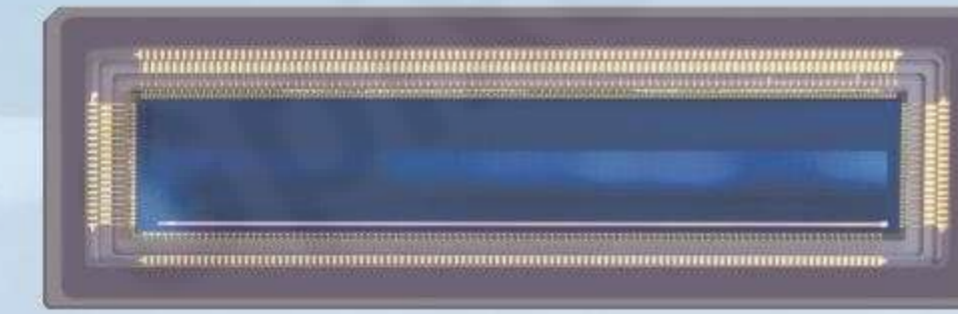

Designed for high speed industrial inspection, GL0816 is a line scan CMOS image sensor which consists of 16 lines of 8322 pixels with 5 μm pixel size and 5 μm inter-line space. It supports dual line, 4-line readout and max 8-line with 2-stage on-chip TDI. The maximum line rate of GL0816 is 200 kHz (11 bit, dual-line mode) and 100 kHz (10 bit, 4-line mode). GL0816 is manufactured with Mono or RGBW 4-band CFA which is customized with extremely low color crosstalk to enable accurate image reproduction.

### Key Features and Benefits


- High Speed
- High Resolution
- TDI

### Application

- Automation & Inspection


Specifications			
<b>Nr of Active Pixels</b>	8322(H) x 16(V)	<b>Optical Format</b>	41.61 mm
<b>Pixel Size</b>	5 μm x 5 μm	<b>Shutter Type</b>	Global Shutter
<b>Peak QE</b>	>70% (600 nm)	<b>Temporal Noise</b>	13 e <sup>-</sup> (11 bit,dual line)
<b>Full Well Capacity</b>	17 ke <sup>-</sup> (11 bit,dual line),15 ke <sup>-</sup> (10 bit,quad line)	<b>Angular Response</b>	>15°(85% Response)
<b>Dynamic Range</b>	62 dB (11 bit,dual line)	<b>Max Line Rate</b>	200 kHz (11 bit,dual line),100kHz (10 bit,quad line)
<b>Output Format</b>	66 ch Sub-LVDS	<b>ADC</b>	10/11 bit
<b>Chroma</b>	Mono, RGB Color	<b>Power Consumption</b>	<4 W
<b>Supply Voltage</b>	3.3 V (analog),2.2 V (ADC),2 V (digital/LVDS)	<b>Package</b>	258 pins μPGA (55.8 mm x 18.1 mm)

### Package Drawing

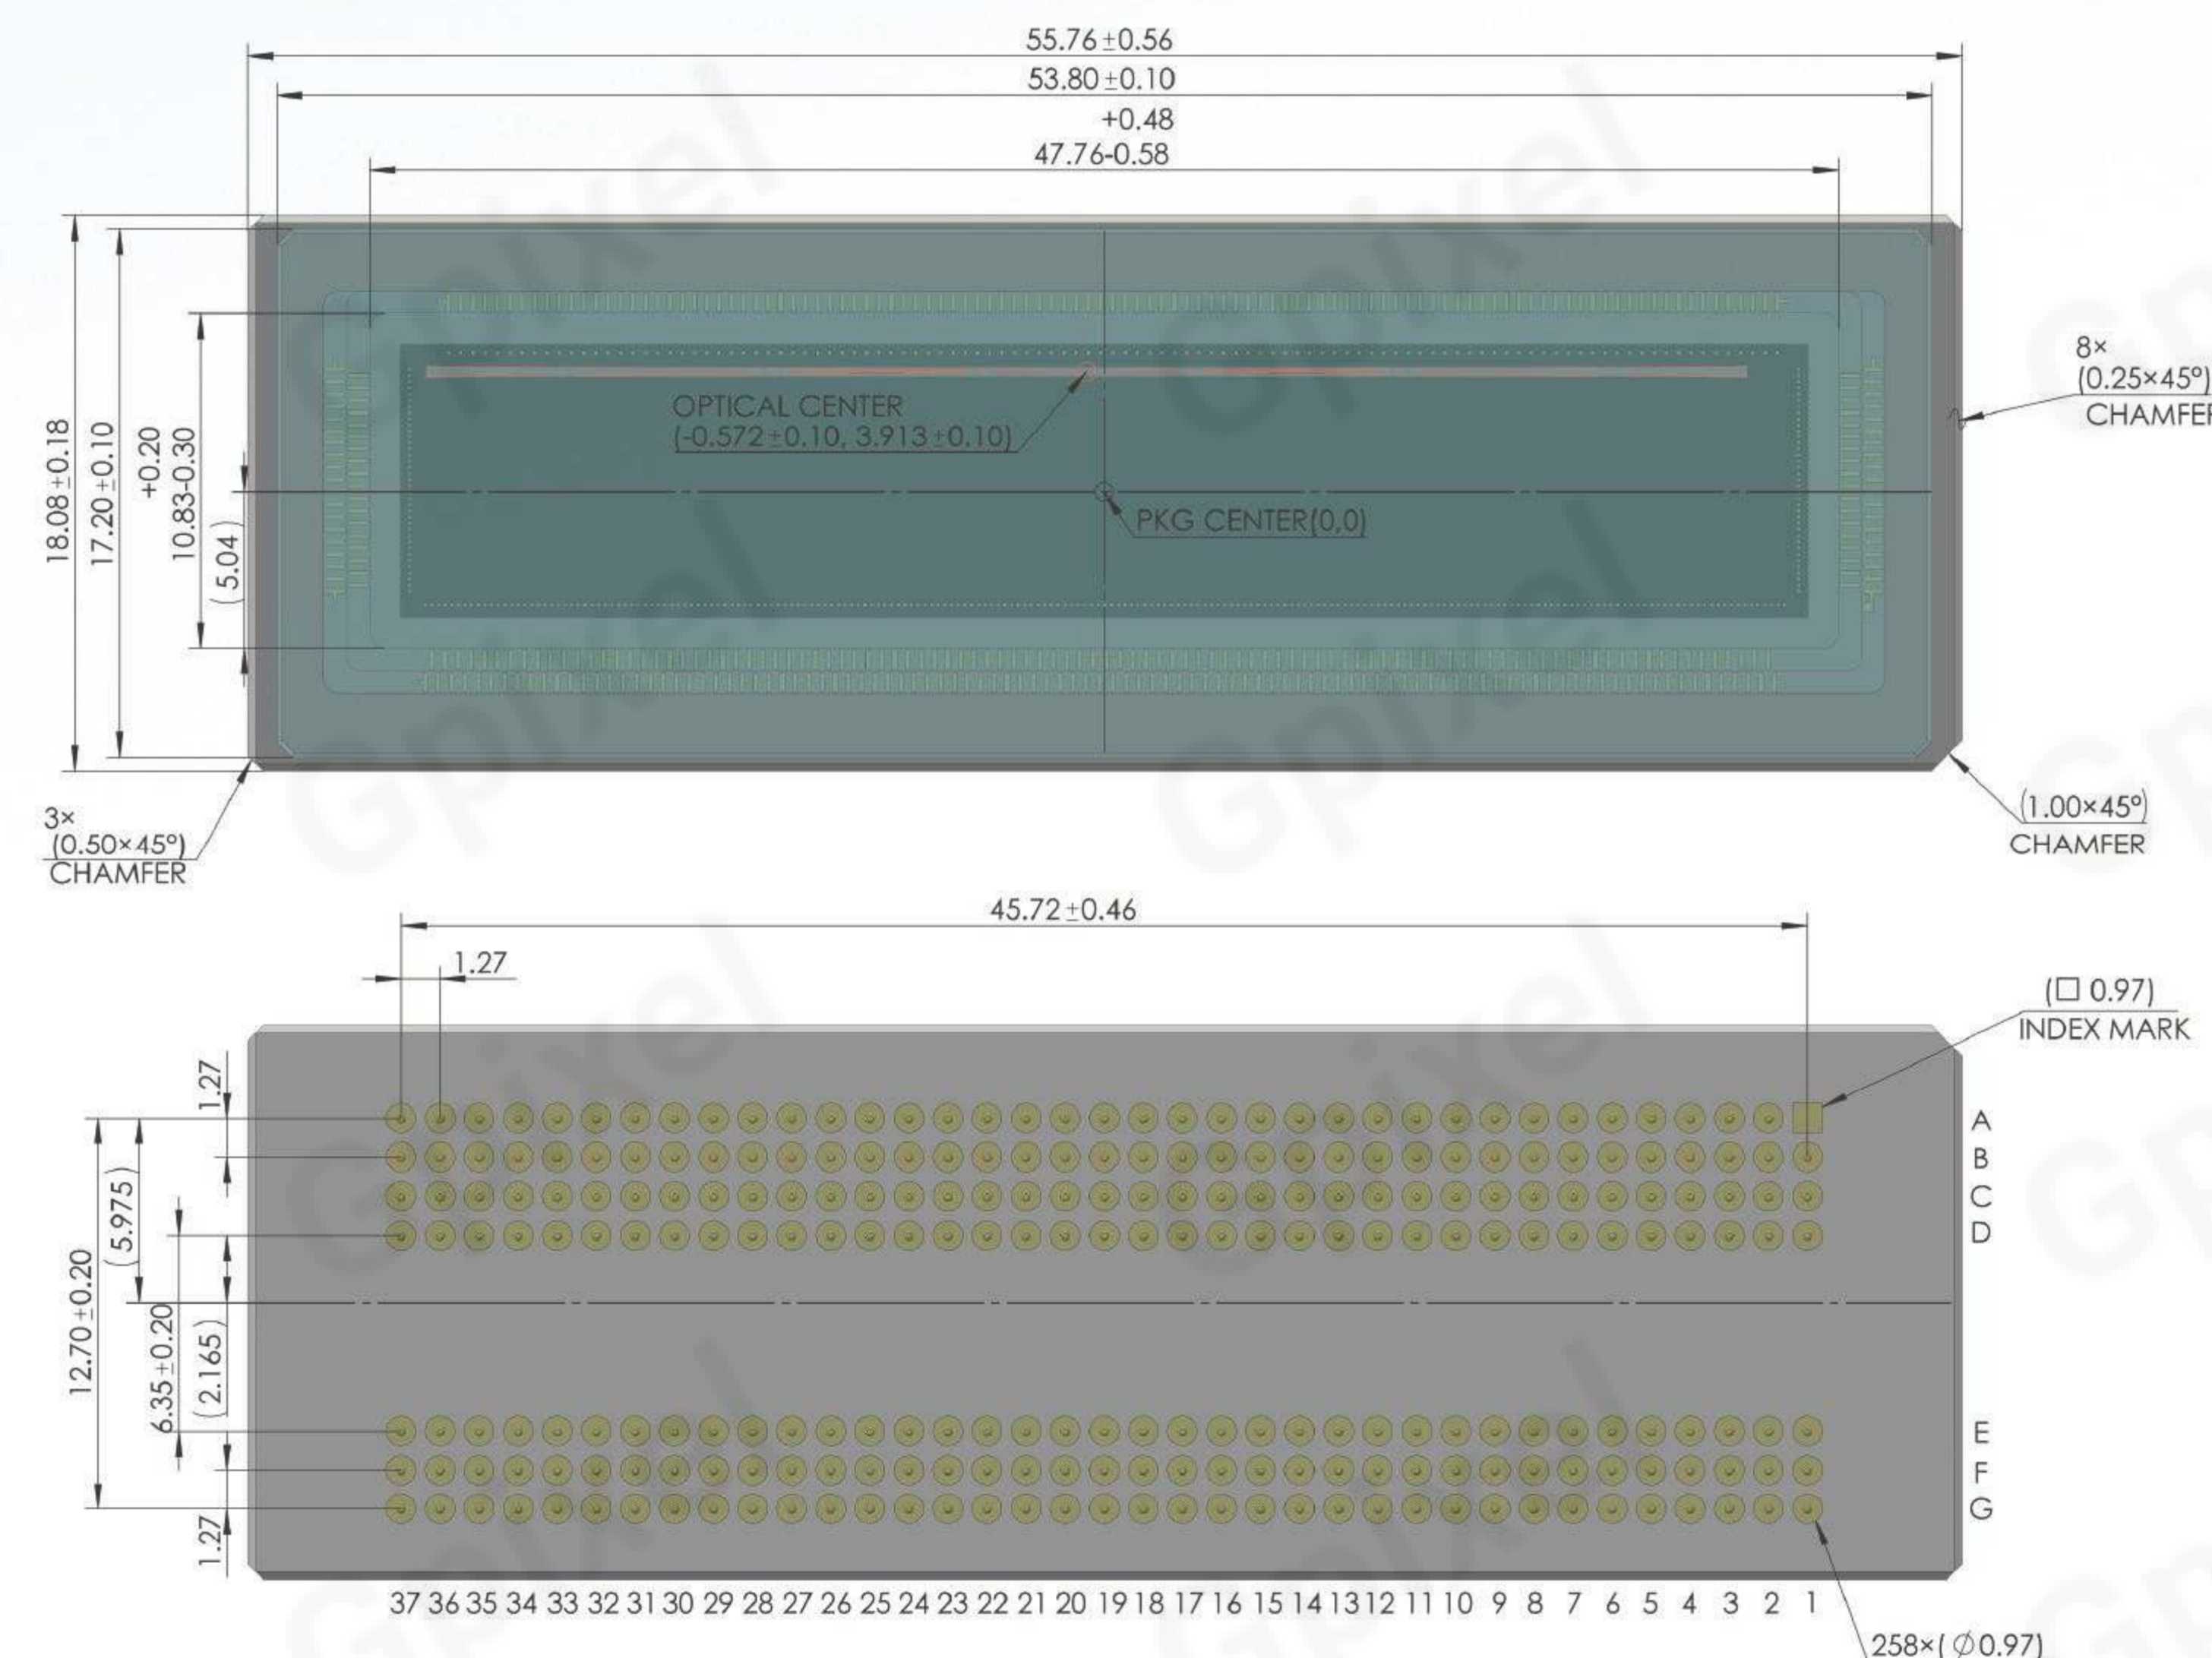

# GLT5009BSI

## 9K BSI TDI CMOS IMAGE SENSOR

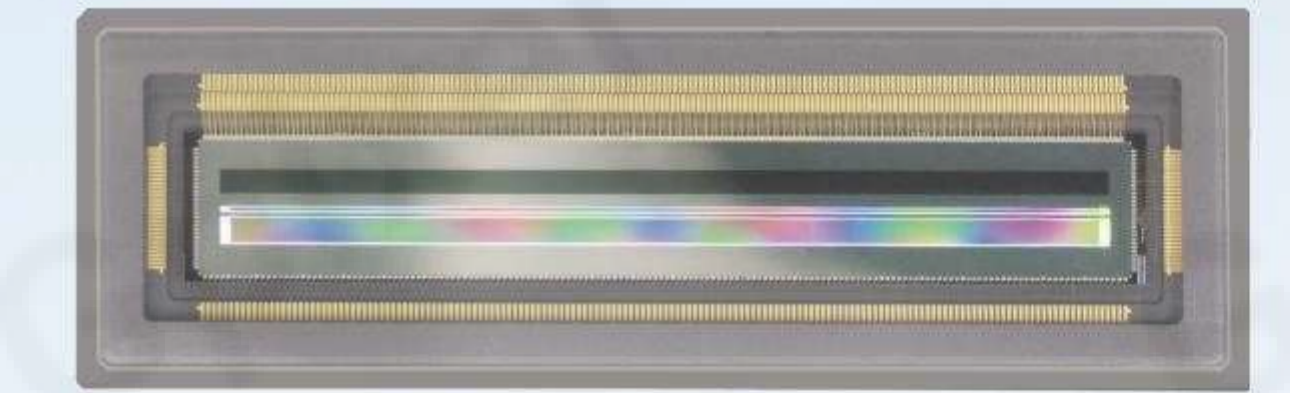

**GLT5009BSI** is a Backside illuminated (BSI), Time delay integration (TDI), charge domain CMOS image sensor with 5 μm pixels and 9k resolutions. The sensor has two photosensitive bands, 256 stages and 32 stages respectively, enabling a high dynamic range (HDR) imaging mode.

**GLT5009BSI** is designed to meet the needs of high speed and low light applications by maximizing sensitivity from the ultraviolet to the near infrared with state-of-art BSI scientific CMOS technology and up to 256 true TDI stages. It supports line rates up to 608 kHz using 10-bit single band mode and 300 kHz using 12 bit single band mode. The sensor also supports 10 bit dual band HDR mode, employing both 256 stages and 32 stages for HDR image construction.

The sensor integrates several features to ease camera integration including an internal sequencer, channel multiplexing, and selectable 2 scan directions. GLT5009BSI is assembled in a 269 pins μPGA ceramic package.

**GLT5009BSI** comes in 2 spectrum variants: a standard variant with a broad spectral response and a dedicated DUV version.

### Key Features and Benefits


- True Charge Domain Time Delay Integration
- High Speed: up to 608 kHz
- Back Side Illuminated (BSI) Pixels
- HDR Read Out
- High Sensitivity
- QE (266 nm) ≥ 50%

### Application

- Automation & Inspection
- Life Sciences
- Microscopy
- Semiconductor Inspection


Specifications			
<b>Nr of Active Pixels</b>	P1:9072(H) pixels x 256(V) stages P2:9072(H) pixels x 32(V) stages	<b>Optical Format</b>	45.36 mm
<b>Pixel Size</b>	5 μm x 5 μm	<b>Full Well Capacity</b>	16.3 ke <sup>-</sup> (10 bit,single band) 19.2 ke <sup>-</sup> (12 bit,single band)
<b>Temporal Noise</b>	10.6 e <sup>-</sup> (10 bit,single band) 7.0 e <sup>-</sup> (12 bit,single band)	<b>Dynamic Range</b>	63.7 dB (10 bit,single band) 68.7 dB (12 bit,single band)
<b>Dark Current</b>	~4 ke <sup>-</sup> /s/pixel (30°C)	<b>Peak QE</b>	82.4% (550 nm)
<b>ADC</b>	10/12 bit	<b>Max Line Rate</b>	608 kHz (10 bit,single band) 300 kHz (12 bit,single band)
<b>Output Format</b>	84 ch Sub-LVDS	<b>Charge transfer efficiency (CTE)</b>	≥ 0.99993
<b>Channel Multiplexing</b>	84/42/21/12/6/3	<b>Max. Data Rate</b>	74.304 Gbps
<b>Chroma</b>	Mono	<b>Power Consumption</b>	<5.8 W (300 kHz line rate)
<b>Supply Voltage</b>	5 V (analog),1.8 V (ADC),1.8 V (digital)	<b>Package</b>	μPGA 269 pins (61.5 mm x 20.0 mm)

### Package Drawing

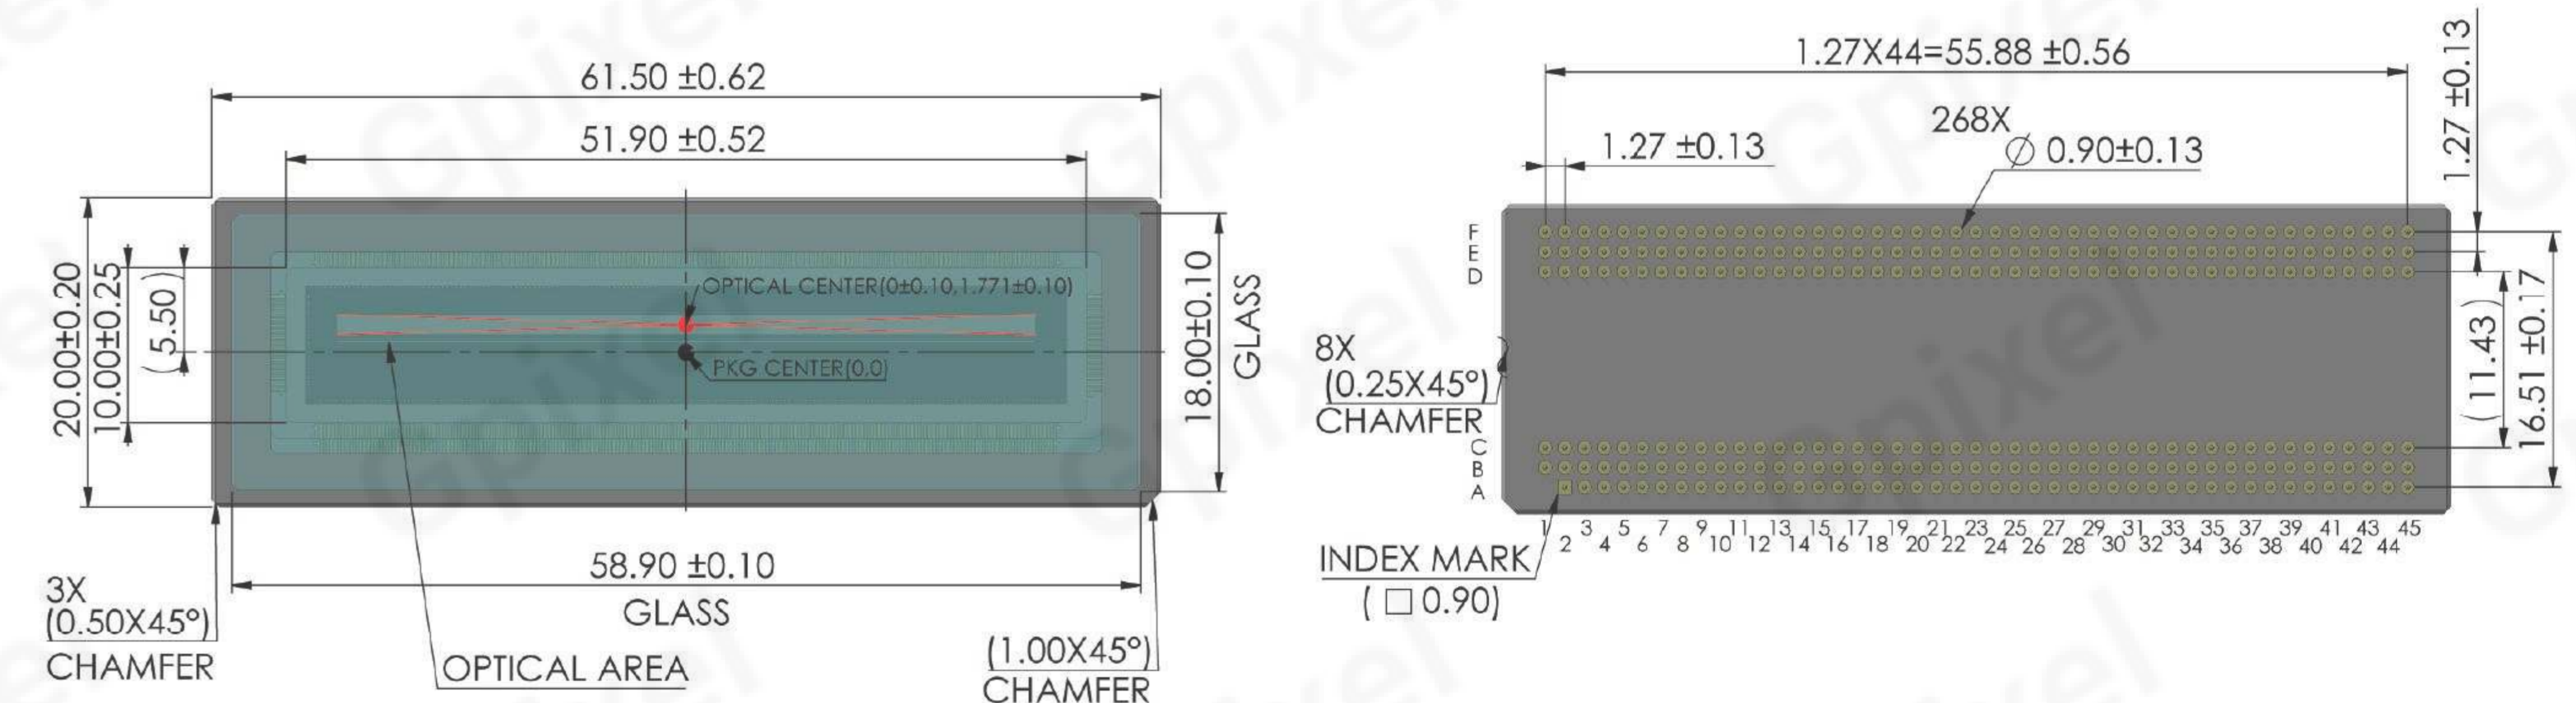

# GLT5008BSI

## 8K BSI TDI LINE SCAN IMAGE SENSOR

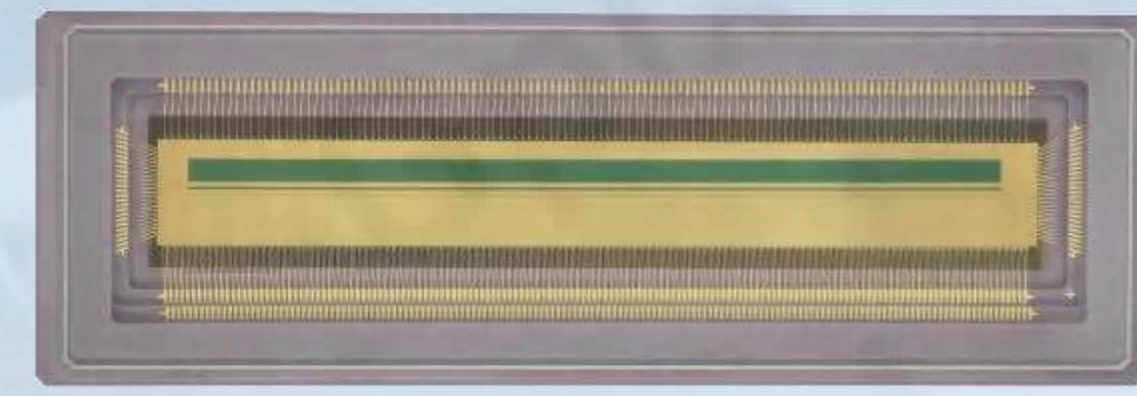

**GLT5008BSI** is a Backside illuminated (BSI), Time delay integration (TDI), charge domain CMOS image sensor with 5 μm pixels and 8208 effective resolutions. The sensor has two photosensitive bands, 256 stages and 32 stages respectively enabling a high dynamic range (HDR) imaging mode, which is designed to meet the needs of high speed and low light applications by maximizing sensitivity with state-of-art BSI scientific CMOS technology.

**GLT5008BSI** Sensor integrates an on-chip sequencer, supports channel multiplexing and selectable 2 scan directions (Forward and Reverse). It is assembled in a 231 pins μPGA ceramic package for reliability and good heat dissipation.

### Key Features and Benefits


- True Charge Domain Time Delay Integration
- High Sensitivity with QE of 65.8% (266 nm) and 94.2% (460 nm)
- HDR Read Out
- Back Side Illuminated (BSI) Pixels
- High Speed: up to 1 MHz
- On-chip Binning

### Application

- Automation & Inspection
- Life Sciences
- Microscopy
- Microluminescence Imaging


Specifications			
<b>Nr of Active Pixels</b>	P1: 8208(H) pixels x 256(V) stages P2: 8208(H) pixels x 32(V) stages	<b>Optical Format</b>	41.04 mm
<b>Pixel Size</b>	5 μm x 5 μm	<b>Full Well Capacity</b>	16.8 ke <sup>-</sup> (P1,10 bit,single band) 17.8 ke <sup>-</sup> (P1,12 bit,single band)
<b>Temporal Noise</b>	12.1 e <sup>-</sup> (P1,10 bit,single band) 7.4 e <sup>-</sup> (P1,12 bit,single band)	<b>Dynamic Range</b>	62.8 dB (P1,10 bit,single band) 67.6 dB (P1,12 bit,single band)
<b>Dark Current</b>	1 ke <sup>-</sup> /pixel/s (P1 10/12 bit,single band,15 °C)	<b>Peak QE</b>	65.8% (266 nm),94.2% (460 nm)
<b>ADC</b>	10/12 bit	<b>Optional TDI Levels</b>	P1: 256/252/224/192/128/64/32/4 P2: 32/30/28/24/16/8/4/2
<b>Max Line Rate</b>	1M Hz (10 bit),500k Hz (12 bit)	<b>Anti-blooming</b>	x50
<b>Output Format</b>	72 ch Sub-LVDS	<b>Charge Transfer Efficiency (CTE)</b>	≥ 0.99993
<b>Channel Multiplexing</b>	72/54/48/36/24/18/12/6 (10 bit)	<b>Max. Data Rate</b>	86.4 Gbps (10 bit)
<b>Chroma</b>	Mono	<b>Power Consumption</b>	≤ 4.1 W (P1,10 bit,1 MHz line rate) ≤ 3.2 W (P1,12 bit,500 kHz line rate)
<b>Supply Voltage</b>	3.3 V (analog),1.6 V (ADC),1.6 V (digital)	<b>Package</b>	μPGA 231 pins· 56.90 mm x 19.00 mm

### Package Drawing

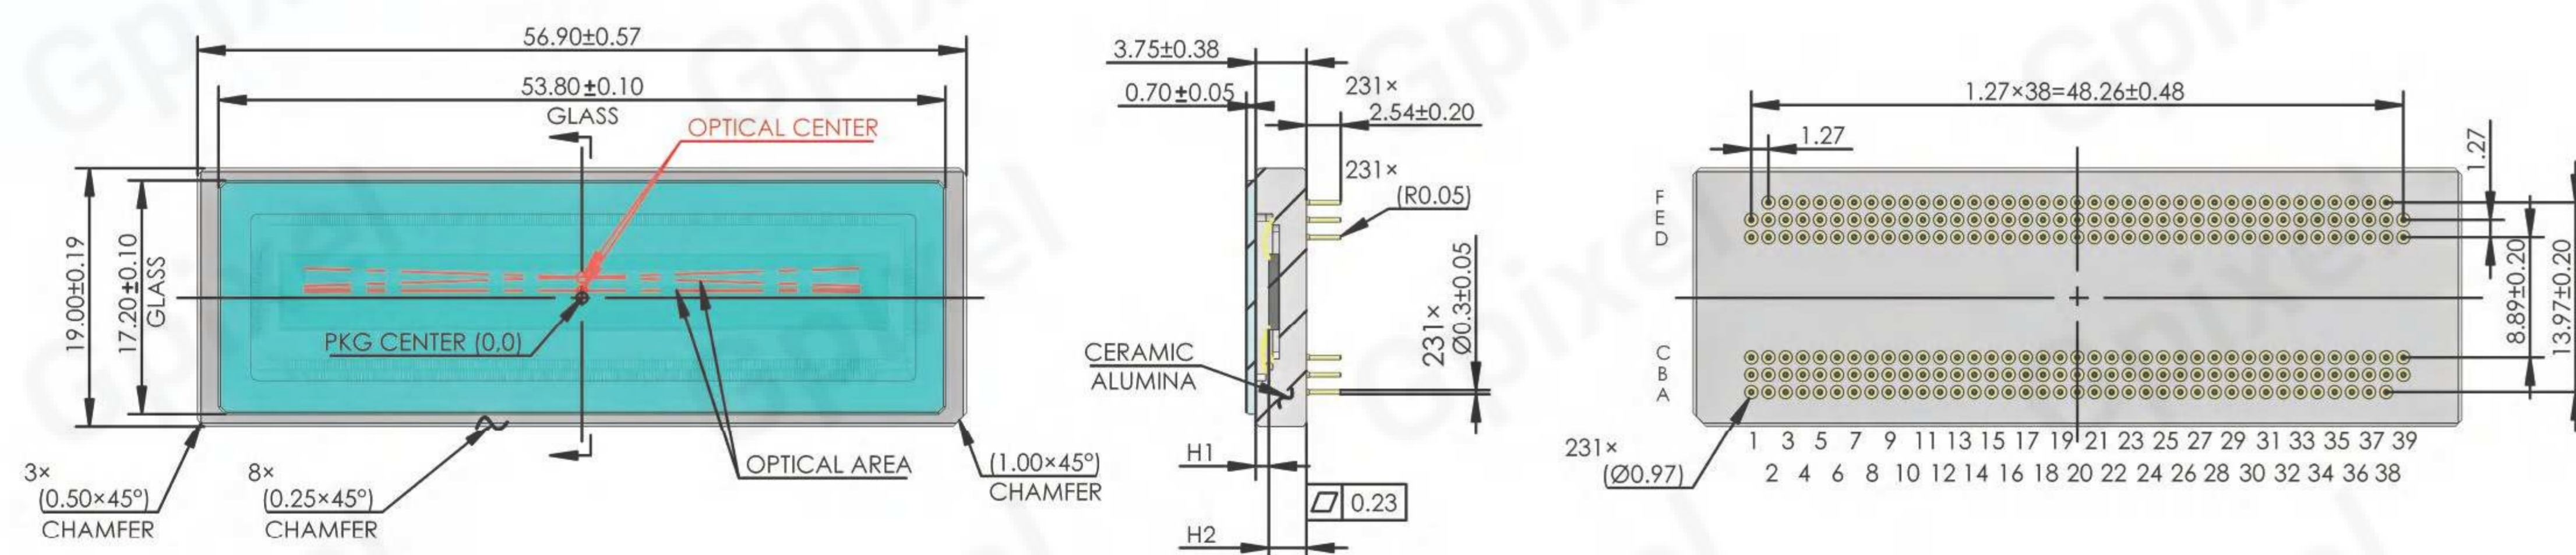

# GLT5016BSI

## 16k BSI TDI LINE SCAN IMAGE SENSOR

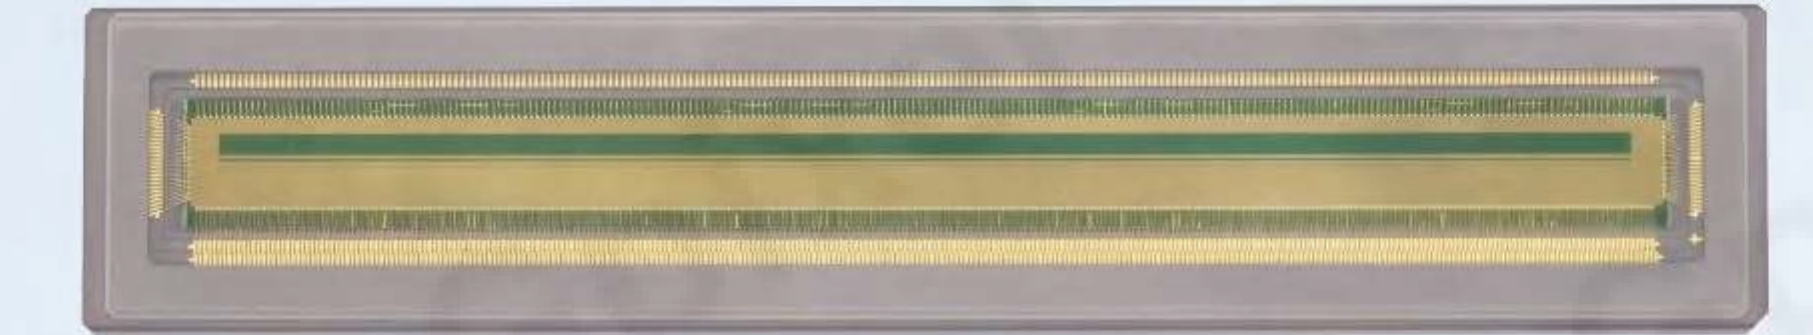

**GLT5016BSI** is a Backside illuminated (BSI), Time delay integration (TDI), charge domain CMOS image sensor with 5 μm pixels and 16416 effective resolutions. The sensor has two photosensitive bands, 256 stages and 32 stages respectively enabling a high dynamic range (HDR) imaging mode, which is designed to meet the needs of high speed and low light applications by maximizing sensitivity with state-of-art BSI scientific CMOS technology.

**GLT5016BSI** Sensor integrates an on-chip sequencer, supports channel multiplexing and selectable 2 scan directions (Forward and Reverse). It is assembled in a 415 pins μPGA ceramic package for reliability and good heat dissipation.

**GLT5016BSI** comes in 2 spectrum variants: an UV-optimized with high QE below 300 nm and a visible and NIR range optimized version.

### Key features and Benefits


- True charge domain Time Delay Integration
- High Sensitivity with QE of 70.7% (266 nm) (UV Version) and up to 92.4 % (440 nm) (VIS version)
- High Speed: up to 500 kHz
- Back Side Illuminated (BSI) pixels
- HDR read out
- On-chip binning

### Application

- Automation & Inspection


Specifications			
<b>Nr of Active Pixels</b>	P1: 16416(H) pixels x 256(V) stages P2: 16416(H) pixels x 32(V) stages	<b>Optical Format</b>	82.08 mm
<b>Pixel Size</b>	5 μm x 5 μm	<b>Full Well Capacity</b>	16.3 ke <sup>-</sup> (P1,10 bit,single band) 15.2 ke <sup>-</sup> (P1,12 bit,single band)
<b>Temporal Noise</b>	7.5 e <sup>-</sup> (P1,12 bit,single band) 15.3 e <sup>-</sup> (P1,10 bit,single band)	<b>Dynamic Range</b>	60.5 dB (P1,10 bit,single band) 66.1 dB (P1,12 bit,single band)
<b>Dark Current</b>	0.97 ke <sup>-</sup> /pixel/s (P1 10/12 bit,single band,15°C)	<b>ADC</b>	12 bit
<b>Peak QE</b>	UV 70.7% (266 nm) ,87.8% (420 nm) VIS 92.4% (436 nm) ,87.0% (590 nm)	<b>Optional TDI Levels</b>	P1: 256/252/224/192/128/64/32/4 P2: 32/30/28/24/16/8/4/2
<b>Max Line Rate</b>	500 kHz	<b>Anti-blooming</b>	x50
<b>Output Format</b>	108 ch Sub-LVDS	<b>Charge Transfer Efficiency (CTE)</b>	≥ 0.99996
<b>Channel Multiplexing</b>	108/96/72/48/36/24/12	<b>Max. Data Rate</b>	103.68 Gbps
<b>Chroma</b>	Mono	<b>Power Consumption</b>	≤ 6.3 W (P1,10 bit,500 kHz line rate) ≤ 6.6 W (P1,12 bit,500 kHz line rate)
<b>Supply Voltage</b>	3.3 V (analog),1.65 V (ADC),1.6 V (digital)	<b>Package</b>	μPGA 415 pins (98.08 mm x 19.00 mm)

### Package Drawing

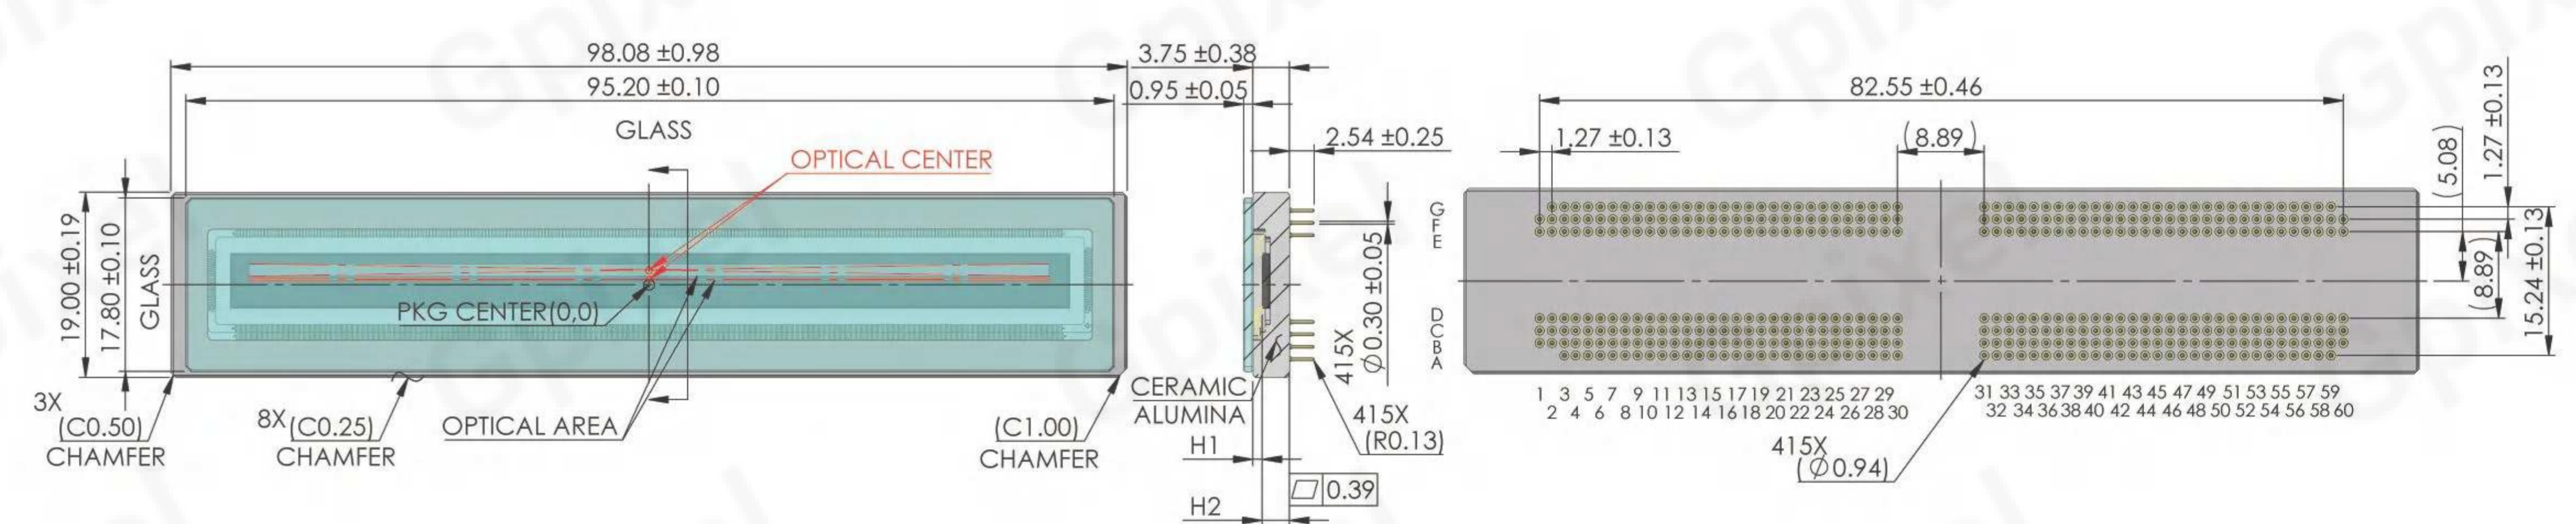

# GL7008

## 8K LINE SCAN CMOS IMAGE SENSOR

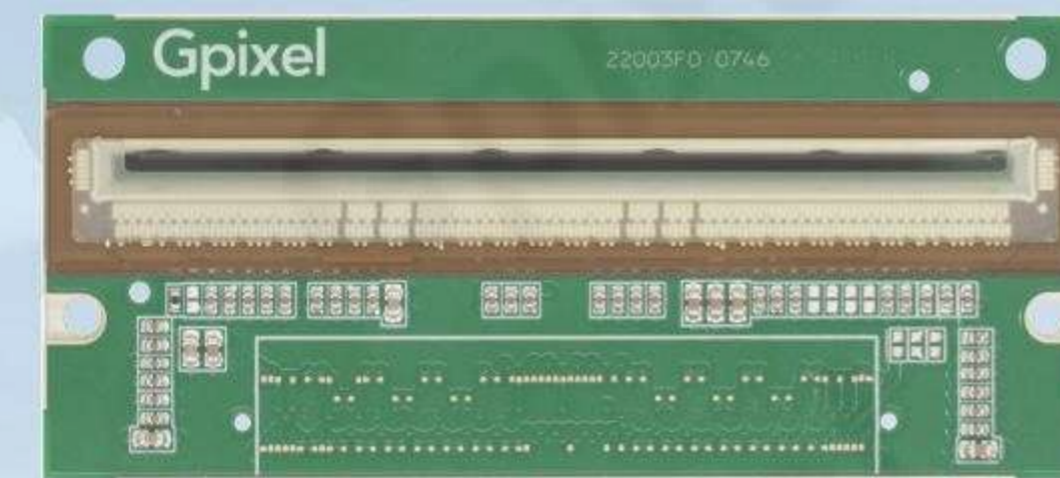

**GL7008** is a global shutter line scan image sensor with 7 μm square pixel and 8192 horizontal pixels resolutions. The sensor's 12 bit ADC transmits data over 25 pairs of Sub-LVDS at line rate up to 200 kHz. GL7008 is offered in both color and monochrome versions. The monochrome sensor supports single/dual/triple/quad line modes with optimal sensitivity. The color sensor supports 3-line true color and 4-line RGBW multispectral output. The exposure time of each line can be individually adjusted by an external trigger. The line spacing of the sensor is equivalent to the pixel size to satisfy the requirements of line frequency matching. At full speed, the power consumption of GL7008 is around 4.4 W. The sensor adopts a COB package with Invar heat sink for optimal heat dissipation during high-speed scanning.

### Key Features and Benefits


- Individual Exposure Control for Each Color Line
- On Chip PLL
- External Trigger
- On Chip Sequencer
- Channel Multiplexing

### Application

- Automation & Inspection
- Logistic & Positioning

Specifications			
Nr of Active Pixels	8192(H) x 4(V)	Optical Format	57.344 mm
Pixel Size	7 μm x 7 μm	Shutter Type	Global Shutter
Peak QE	73.2% (530 nm)	Temporal Noise	6.8 e <sup>-</sup>
Full Well Capacity	10 ke <sup>-</sup>	Angular Response	20° (85% Response)
Dynamic Range	63.3 dB	Max Line Rate	200 kHz (single line), 100 kHz (dual line)
Output Format	25 ch Sub-LVDS	Channel Multiplexing	25/13/7/4
ADC	12 bit	Max. Data Rate	24 Gbps
Chroma	Mono, RGB Color	Power Consumption	4.4 W
Supply Voltage	3.3 V (analog), 1.8 V-3.3 V (IO), 1.8 V (digital)	Package	168 Pins COB (71.8 mm x 33.0 mm)


### Package Drawing

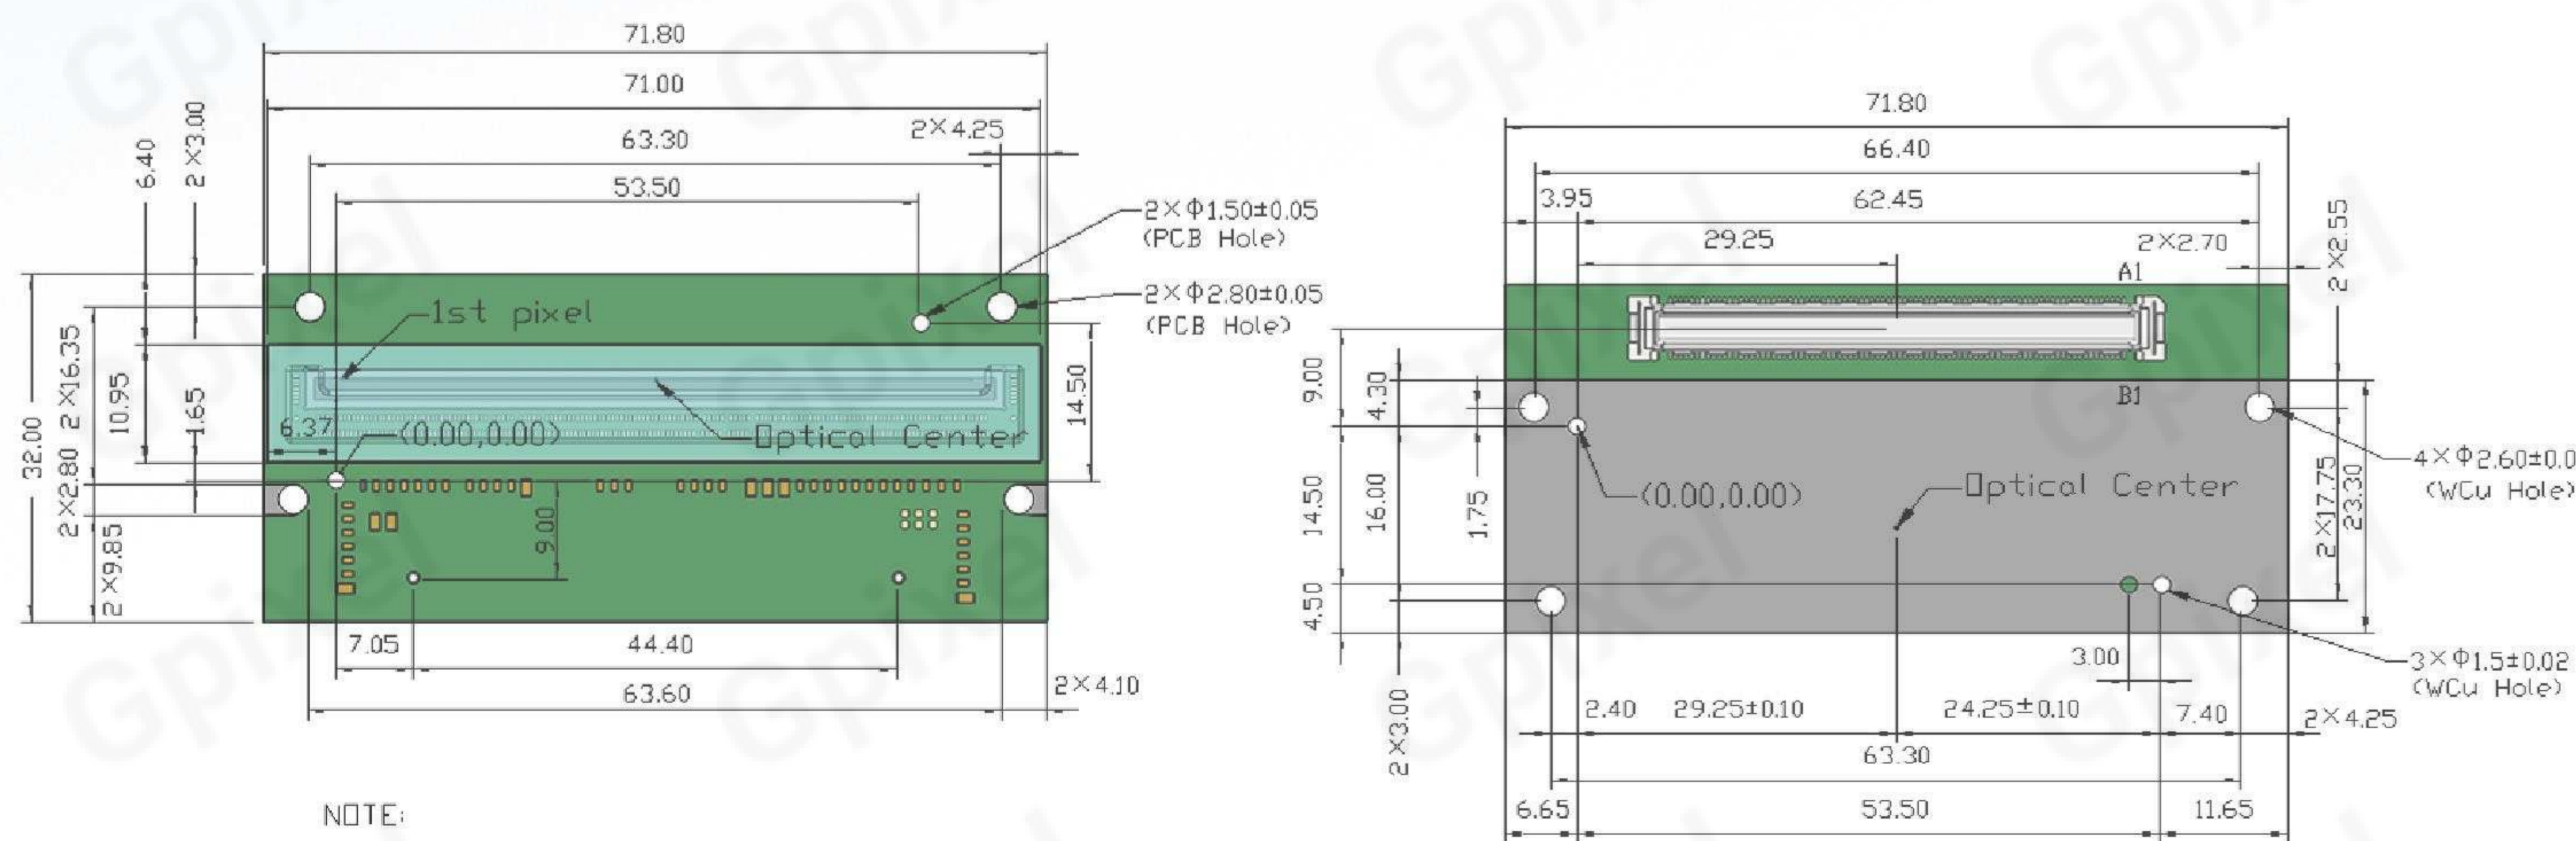

NOTE:  
 1. GL7008 COLOR 4 lines, Optical Center1(29.25±0.10,9.333±0)  
 GL7008 MONO 2 lines, Optical Center2(29.25±0.10,9.305±0)  
 2. All tolerances +/-0.1mm unless otherwise noticed

# GL3516

## 16K LINE SCAN CMOS IMAGE SENSOR

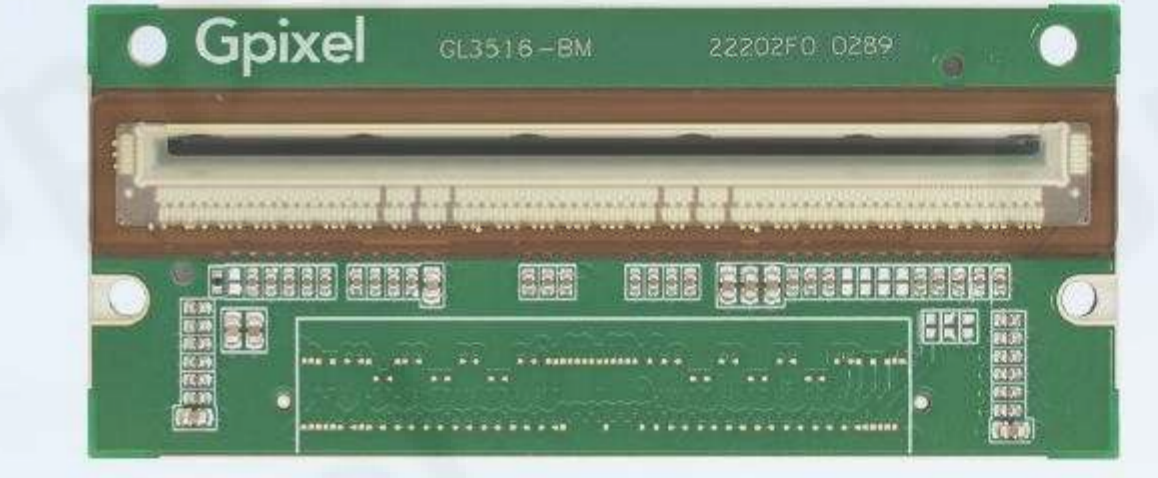

**GL3516** is a 16384 x 2 resolution, 3.5 μm square pixel, line scan CMOS image sensor that supports maximum 120 kHz line rate in single line mode and 60 kHz line rate in dual line mode. **GL3516** is pin and footprint compatible with Gpixel's existing GL7008 8K line scan sensor its features makes is an ideal solution for industrial inspection applications benefitting from high-speed scanning and 16K resolution, including high end inspection production inspections for lithium battery testing, flat panel displays, PCBs, labels, and railway inspection. **GL3516** is offered in both color and monochrome versions. The monochrome sensor support single and dual line modes. The color sensor support dual line mode. GL3516 is assembled in a COB package with Invar heat sink for optimal heat dissipation and with connector for easy integration.


### Key Features and Benefits

- High Speed
- Low Power Consumption
- High Resolution
- Easy Integration

### Application

- Automation & Inspection

Specifications			
Nr of Active Pixels	16384(H) x 2(V)	Optical Format	57.344 mm
Pixel Size	3.5 μm x 3.5 μm	Shutter Type	Global Shutter
Peak QE	56.7% (560 nm)	Temporal Noise	10.6 e <sup>-</sup>
Full Well Capacity	8.4 ke <sup>-</sup>	Angular Response	20° (85% Response)
Dynamic Range	58.0 dB	Max Line Rate	120 kHz (single line)
Output Format	25 ch Sub-LVDS	Channel Multiplexing	25/13/7/4
ADC	10 bit	Max. Data Rate	24 Gbps
Chroma	Mono, RGB Color	Power Consumption	3.2 W
Supply Voltage	3.3 V (analog), 1.8 V (digital), 1.8 V-3.3 V (IO)	Package	168 Pins COB (71.8 mm x 33.0 mm)

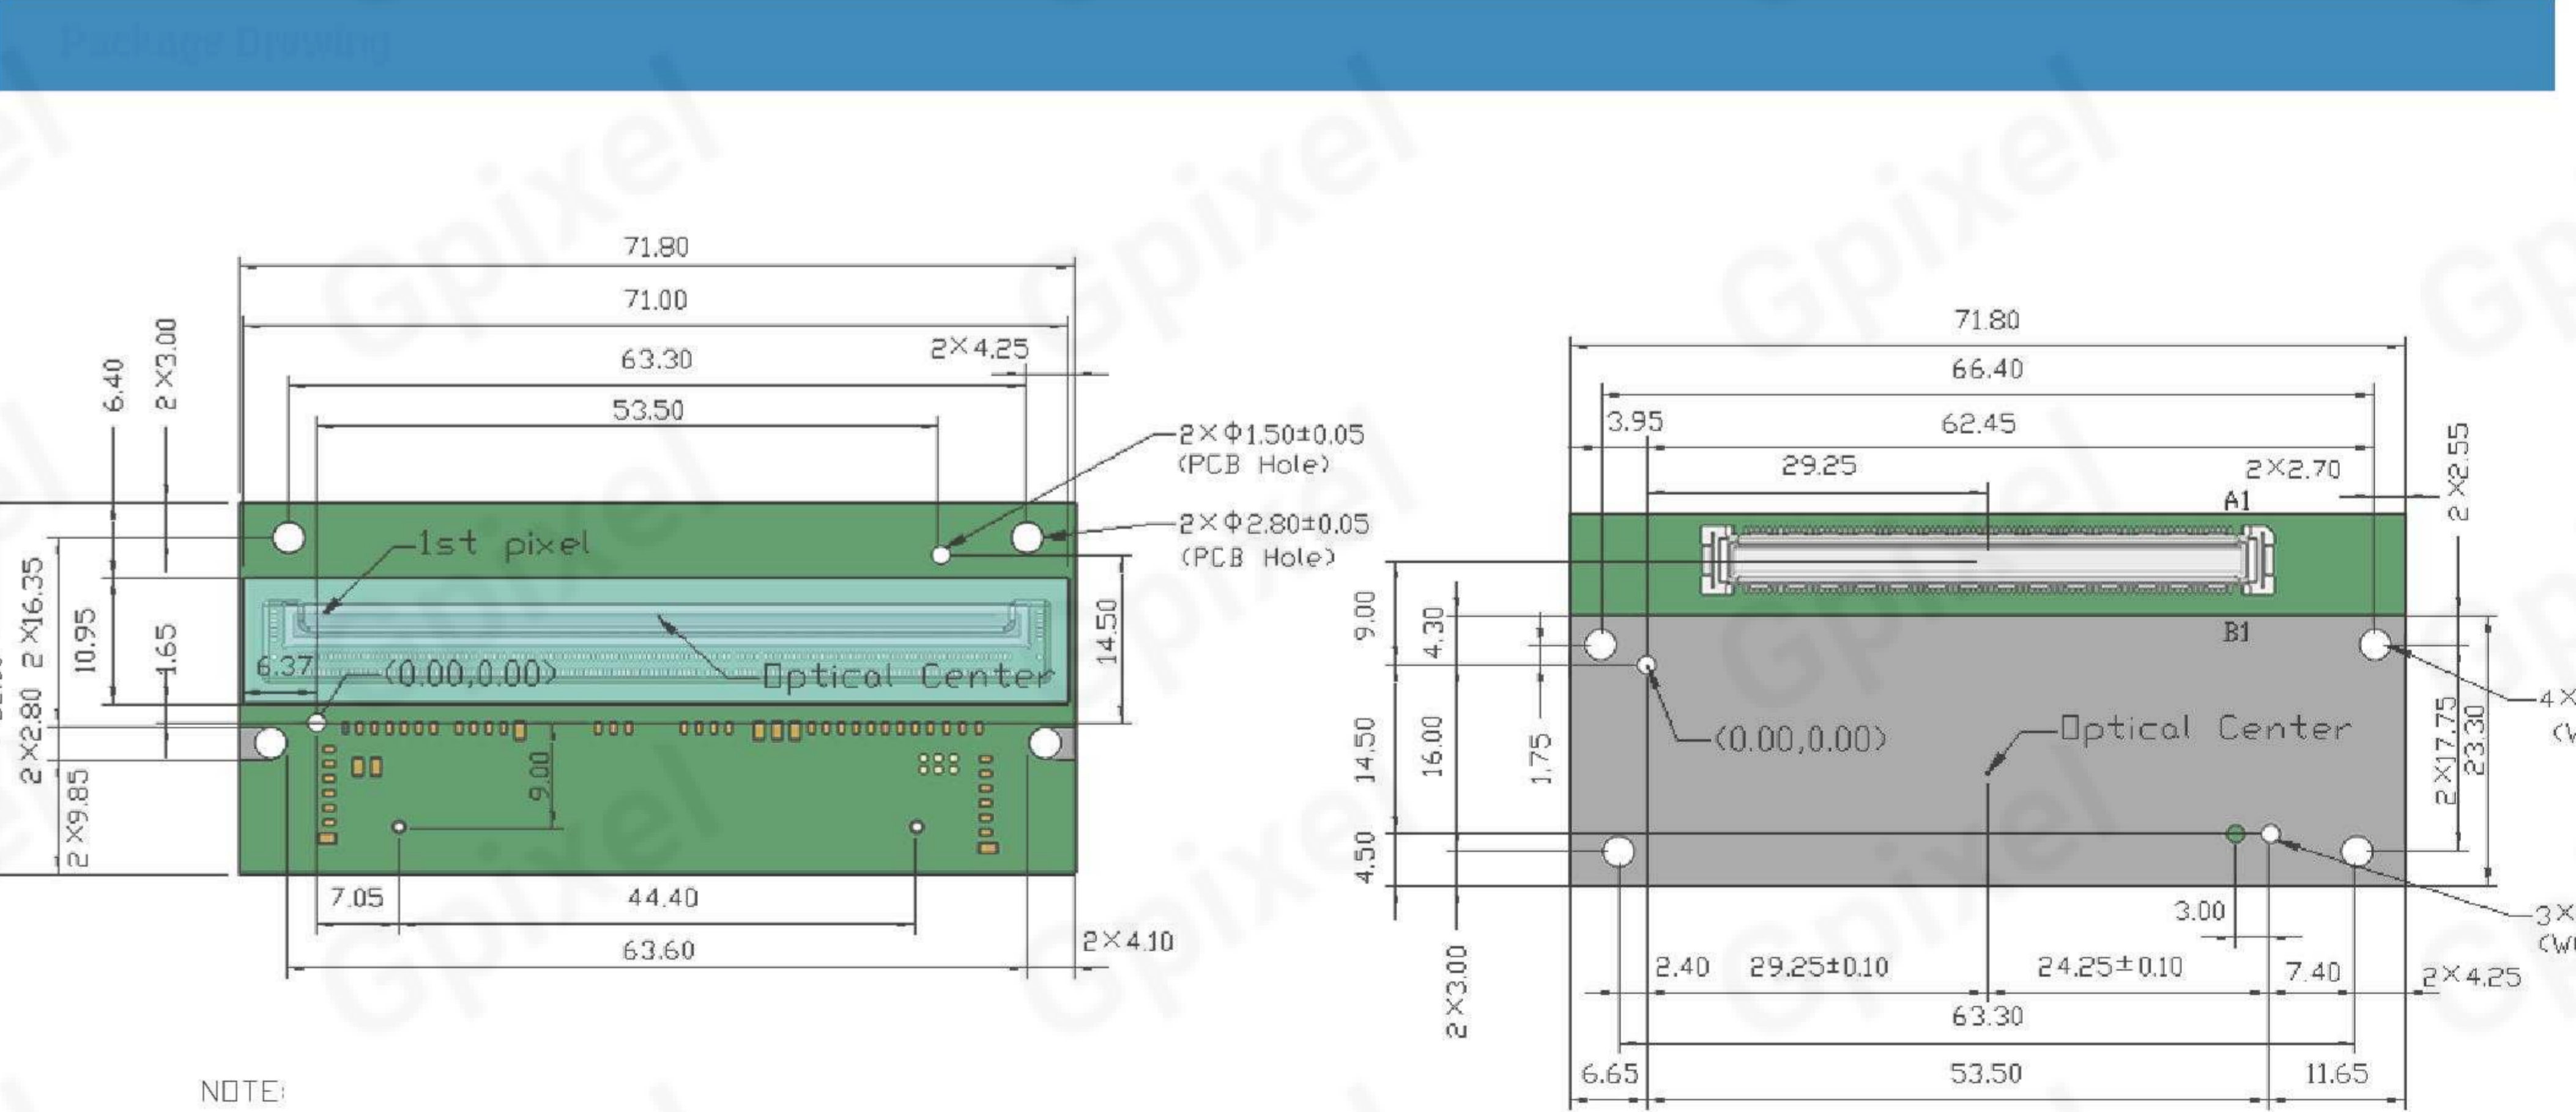

NOTE:  
 1. GL3516 COLOR 2 lines, Optical Center1(29.25±0.10,9.246±0.10)  
 GL3516 MONO 2 lines, Optical Center2(29.25±0.10,9.204±0.10)  
 2. All tolerances +/-0.1mm unless otherwise noticed

## Area Scan CMOS Image Sensor

The GXS series is a family of CMOS image sensors and modules specifically designed for medical endoscopy devices. Utilizing advanced wafer-level chip packaging technology, these sensors offer extreme compactness, a critical feature for the space-constrained environments of endoscopic applications. This innovative design allows for the development of smaller, more maneuverable endoscopes, ultimately enhancing diagnostic and therapeutic procedures.

GXS1508/GXSM1508

### Product Family Features


- High sensitivity
- Compact CSP package
- BSI
- Integrated WLO lens

### Applications

- Disposable endoscope



# GXS1508/GXSM1508

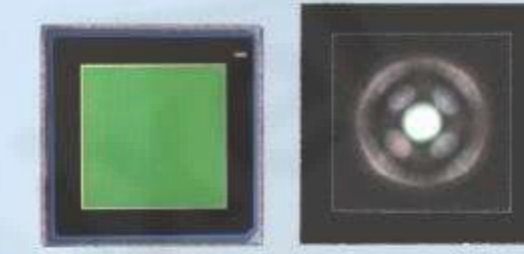

## Small-sized CMOS image sensor/optical module

**GXS1508** is a 0.16 (400 x 400) Megapixel backsideillumination image sensor designed with 1.5 μm charge domain rolling shutter pixels. It can achieve 7 ke<sup>-</sup> FWC and 6 e<sup>-</sup> rms read noise.

**GXS1508** is smaller than 1mm, consumes less than 20 mW and can capture images and video up to 30 frames per second.

**GXSM1508** is wafer level optics (WLO) integratedmodule based on GXS1508 sensor, The WLO consist of 3-surface lens with F number of 5.0, the diagonal FOV is 120°.

Its unique features make it an ideal solution for medical endoscopy's disposable devices.


### Key Features and Benefits

- BSI
- High Sensitivity
- Compact CSP Packaging
- WLO

### Application

- Disposable endoscope

Specifications			
Nr of Active Pixels	400 (H) x 400 (V)	Optical Format	1/19"
Pixel size	1.5 μm x 1.5 μm	Photosensitive Area	0.6 mm x 0.6 mm
Shutter type	Rolling shutter	Peak QE	54.7% (515 nm)
Full Well Capacity	7 ke <sup>-</sup>	Temporal Noise	6.1 e <sup>-</sup>
Dynamic Range	61.2 dB	Angular Response	25.6° ± 3°
Output Format	Analog	Dark Current	TBD
Max Frame Rate	30 fps	Power Consumption	17 mW
DSNU	TBD	Supply Voltage	3.3 V
Chroma	RGB Color	Package	4 pins CSP (0.961 mm x 0.961 mm x 0.55 mm)
WLO Specification			
Field of View (FOV)	Horizontal 83°, Diagonal 120°	F Number	5.0
Focal Length	0.36 mm	Optical Layout	3-surface lens
TV Distortion	12.2 %	DOF	4-50 mm
IR Filter	665 nm ± 10 nm		
Package Drawing			

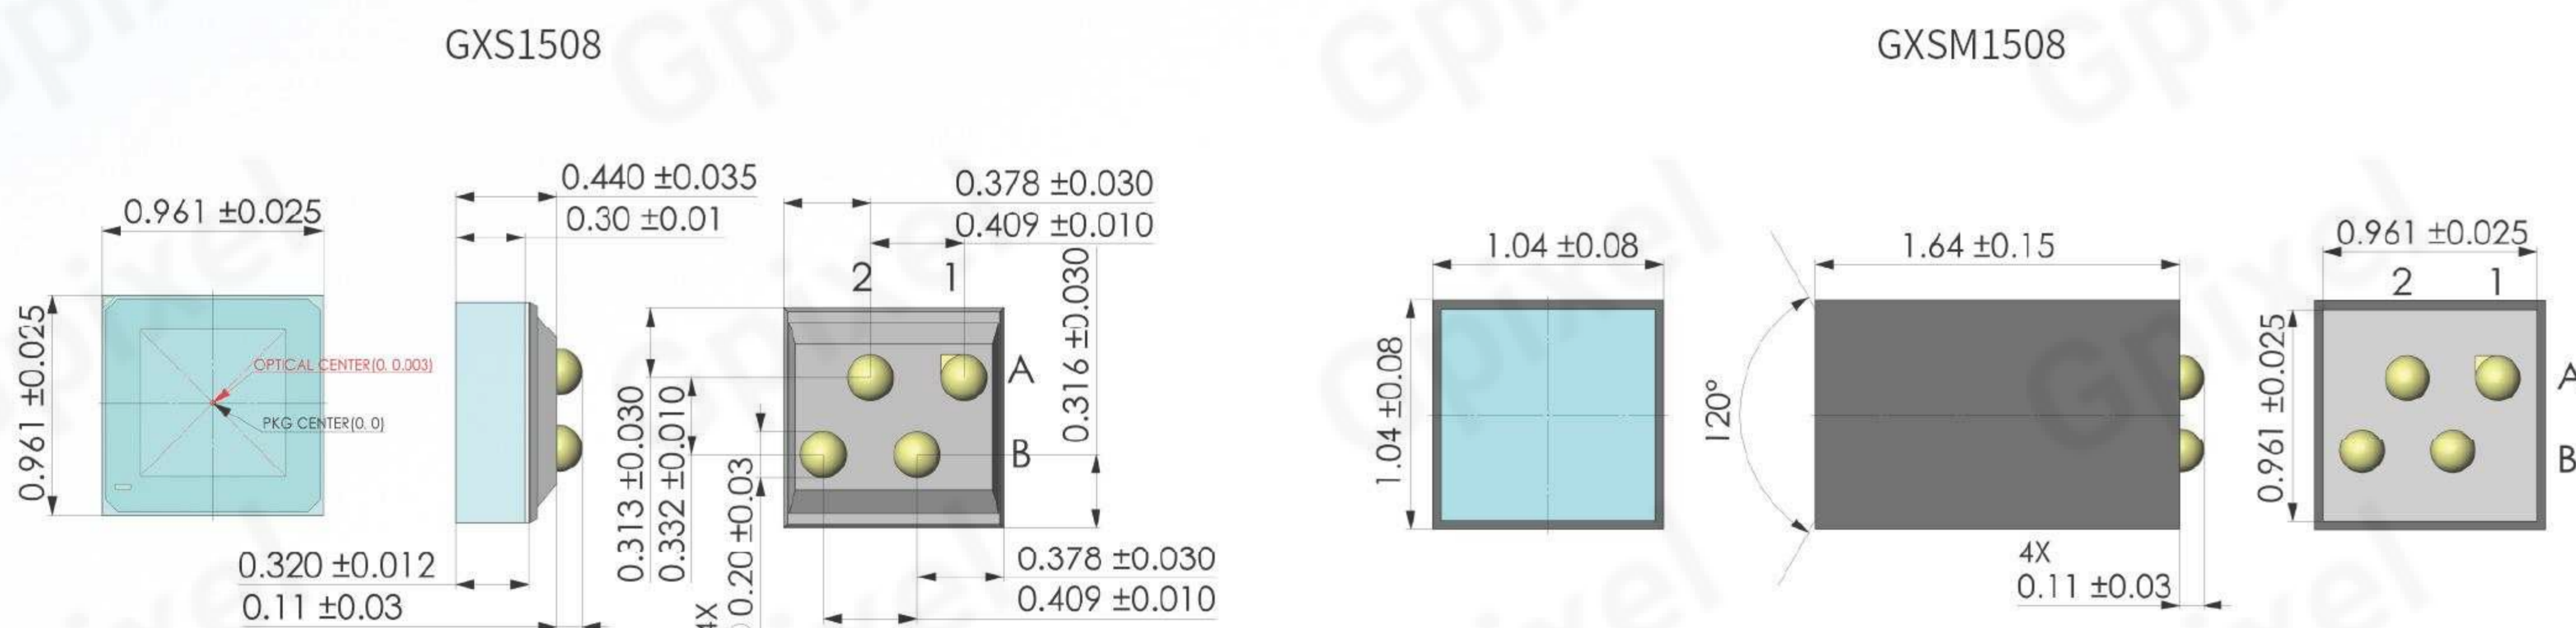

GMAX | GSPRINT | GSENSE | GLUX | GTOF | GCINE | GL | GXS | **GIR**

## SWIR Image Sensor

GIR is a family of sensors sensitive in both the visible and the short-wave infrared (SWIR) portions of the spectrum. Gpixel's SWIR product family features sub-LVDS digital output, supporting high data rates and ease of integration. SWIR image sensors can be used in a variety of industrial and scientific applications where their ability to reveal otherwise invisible features including quality inspection in agriculture, pharmaceuticals, and semiconductors.

GIR2505


GIR1205

### Product Family Features

- High Sensitivity
- High Line Rate
- Digital Output


### Applications

- Industrial Inspection
- Color and Food Sorting
- OCT

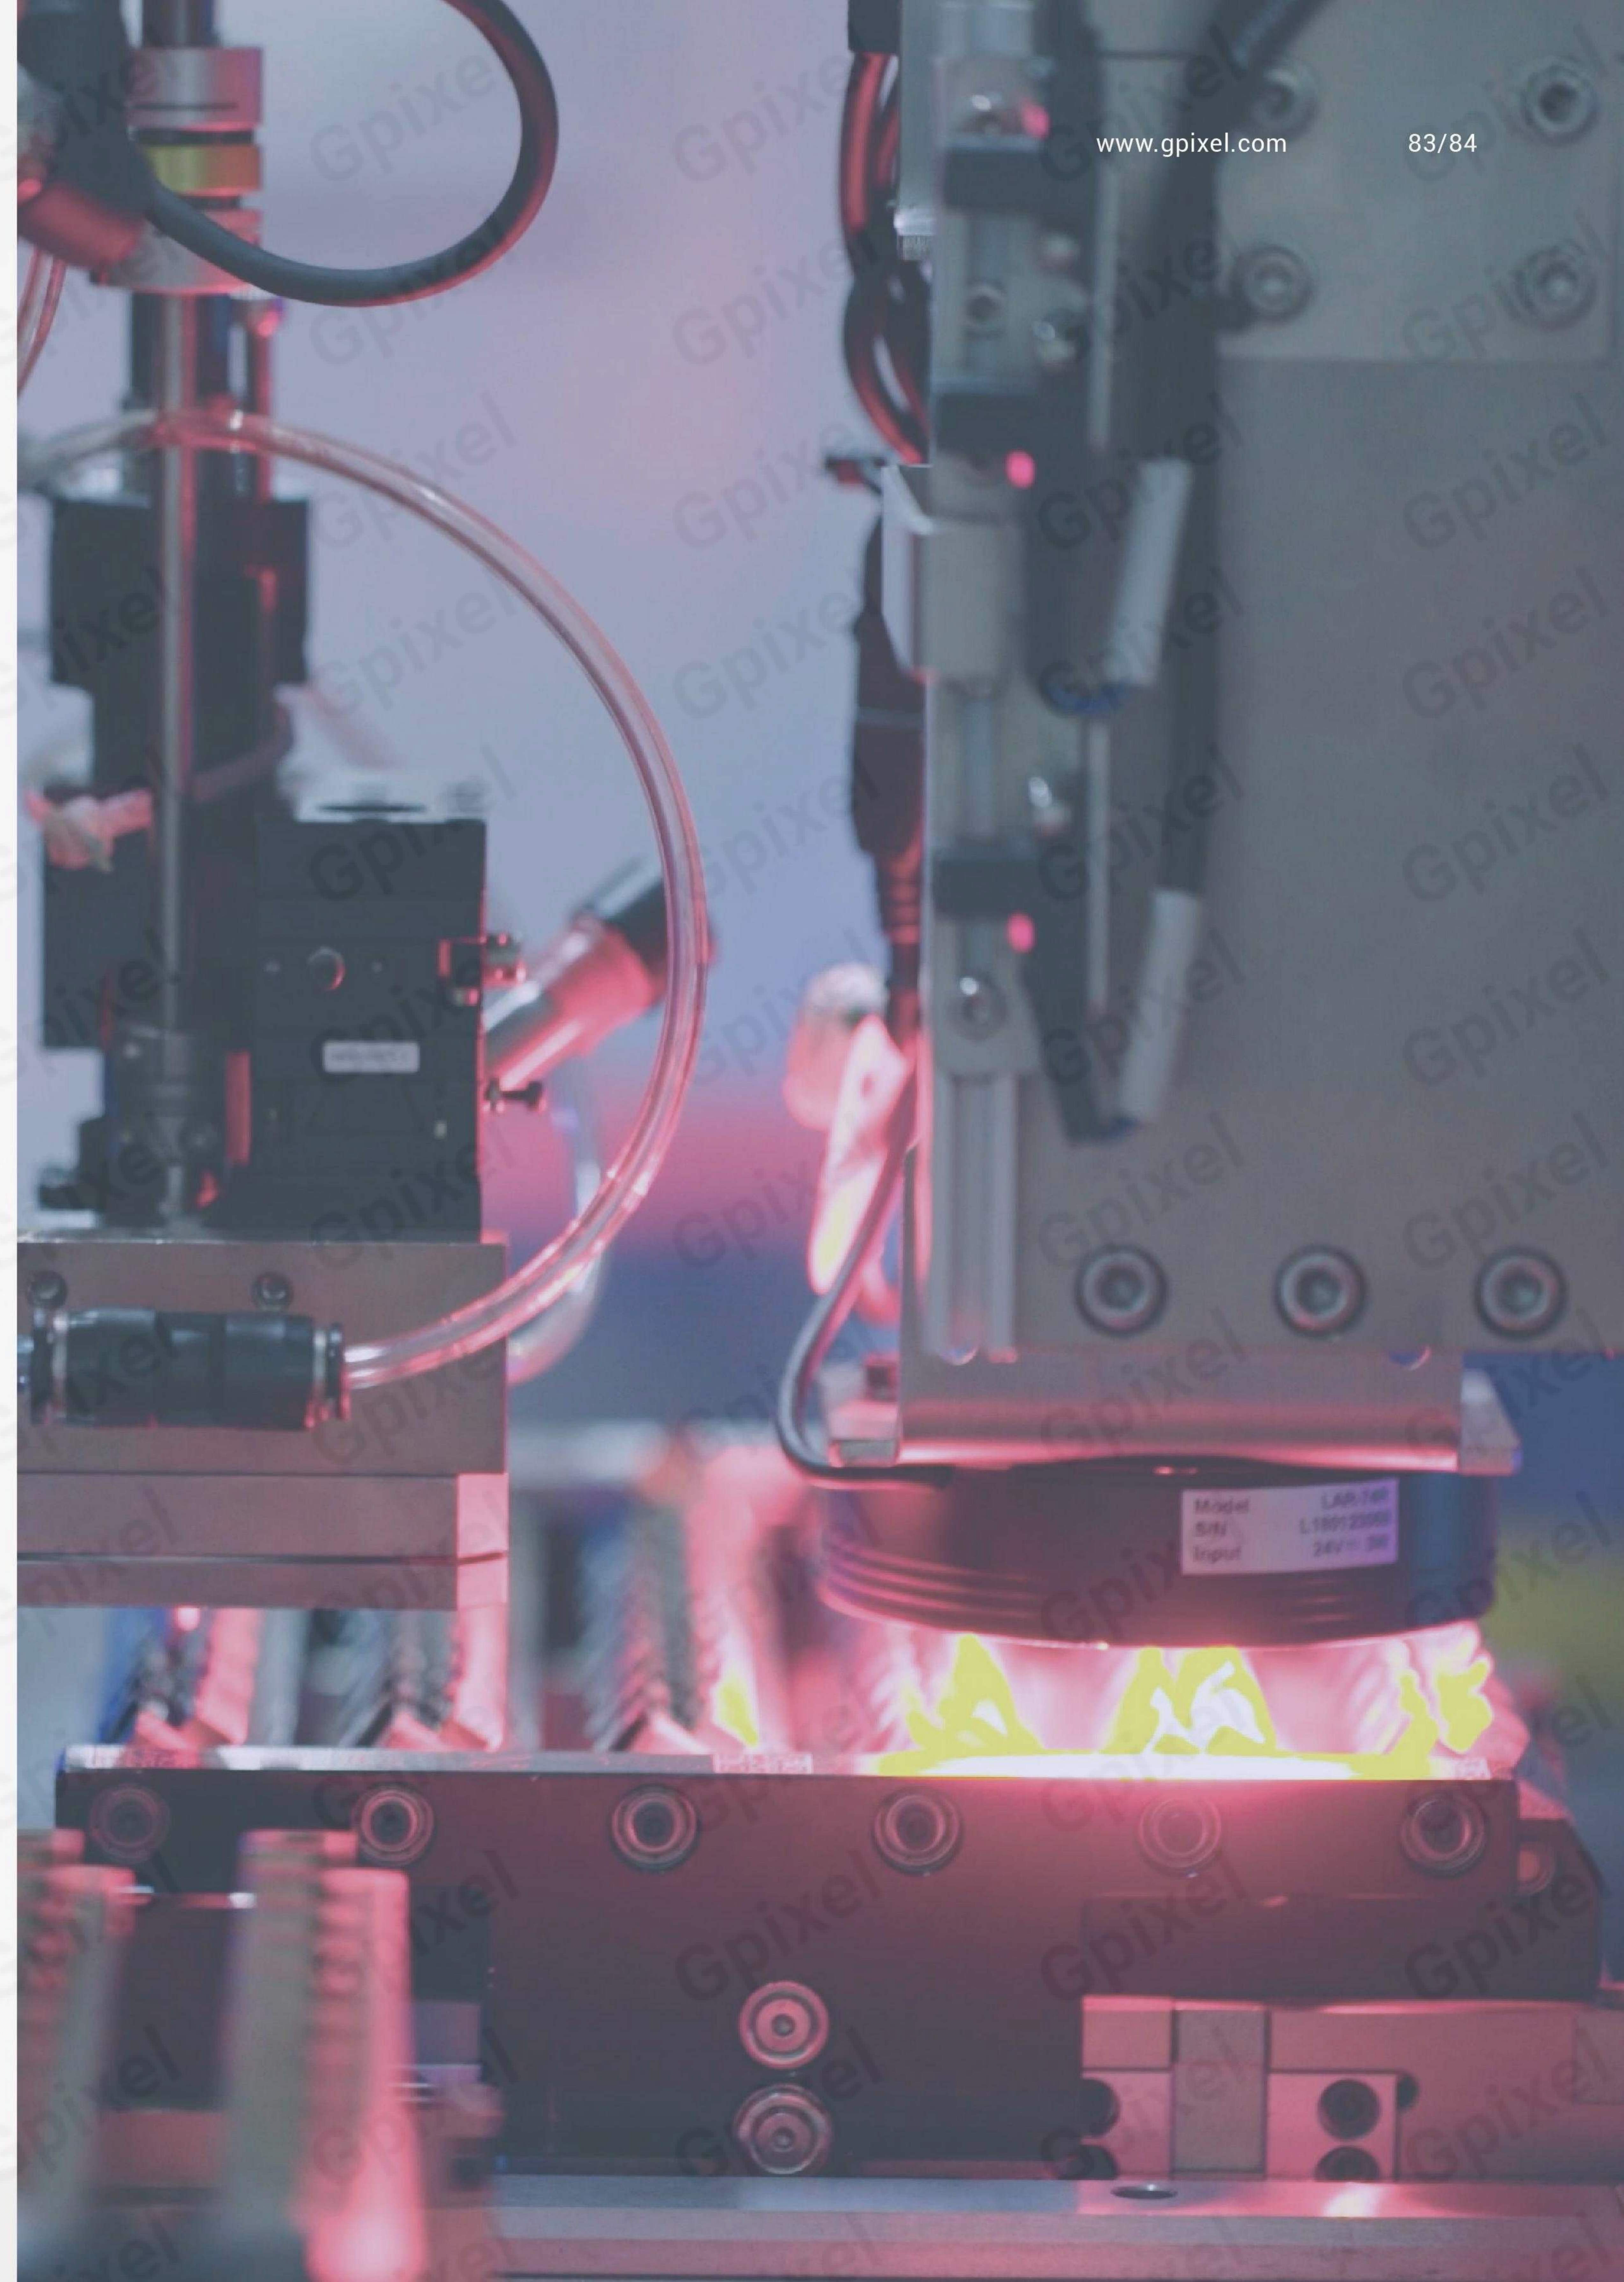

# GIR2505

## 512 x 2 InGaAs LINE SCAN SENSOR

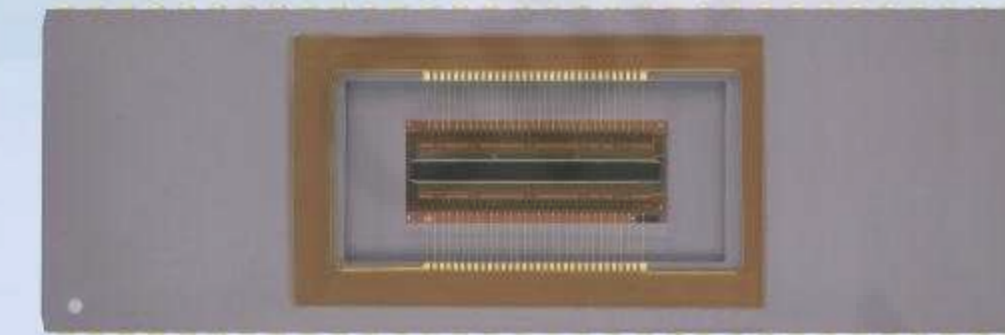

**GIR2505** is a 512 (H) x 2 (V) InGaAs line scan image sensor with 25 μm square global shutter pixel. The sensor integrates a 12 bit ADC and provides 70 dB of dynamic range. Both high-gain (HG) and low-gain (LG) modes are supported. In LG mode, GIR2505 has a maximum full well capacity of 1.6 Me<sup>-</sup> with readout noise of 450 e<sup>-</sup>. In HG mode, the maximum full well capacity is 85 ke<sup>-</sup> with readout noise of 116 e<sup>-</sup>. It utilizes 2 pairs of Sub-LVDS interfaces with a maximum data rate of 1.68 Gbps, for a maximum line frequency of 40.4 kHz. GIR2505 also consumes less than 450 mW at the highest line frequency and is packaged in a 64 pins DIP with a package size of 57.4 x 18.9 mm.

### Key Features and Benefits


- Sub-LVDS Output Format
- On-chip 12 bit ADC with Dynamic Range of 70 dB
- Line Rate up to 40.4 kHz

### Application

- Industrial Inspection
- Color and Food Sorting
- OCT


Specifications			
<b>Nr of Active Pixels</b>	512 (H) x 2 (V)	<b>Optical Format</b>	12.8 mm
<b>Photosensitive area</b>	25 μm x 25 μm	<b>Shutter Type</b>	Global Shutter
<b>Peak QE</b>	75% (1550 nm)	<b>Temporal Noise</b>	116 e <sup>-</sup> (12 bit,HG),450 e <sup>-</sup> (12 bit,LG)
<b>Full Well Capacity</b>	85 ke <sup>-</sup> (12 bit,HG),1.6 Me <sup>-</sup> (12 bit,LG)	<b>PRNU</b>	< 2%
<b>Dynamic Range</b>	58 dB (12 bit,HG),70 dB (12 bit,LG)	<b>Max Line Rate</b>	40.4 kHz
<b>Output Format</b>	2 ch Sub-LVDS	<b>Channel Multiplexing</b>	2 to 1
<b>ADC</b>	12 bit	<b>Max. Data Rate</b>	1.68 Gbps
<b>Chroma</b>	-	<b>Power Consumption</b>	0.45 W
<b>Supply Voltage</b>	3.3 V (analog),1.5 V (digital),1.8 V (IO)	<b>Package</b>	64 pins DIP (57.4mm x 18.9 mm)

### Package Drawing

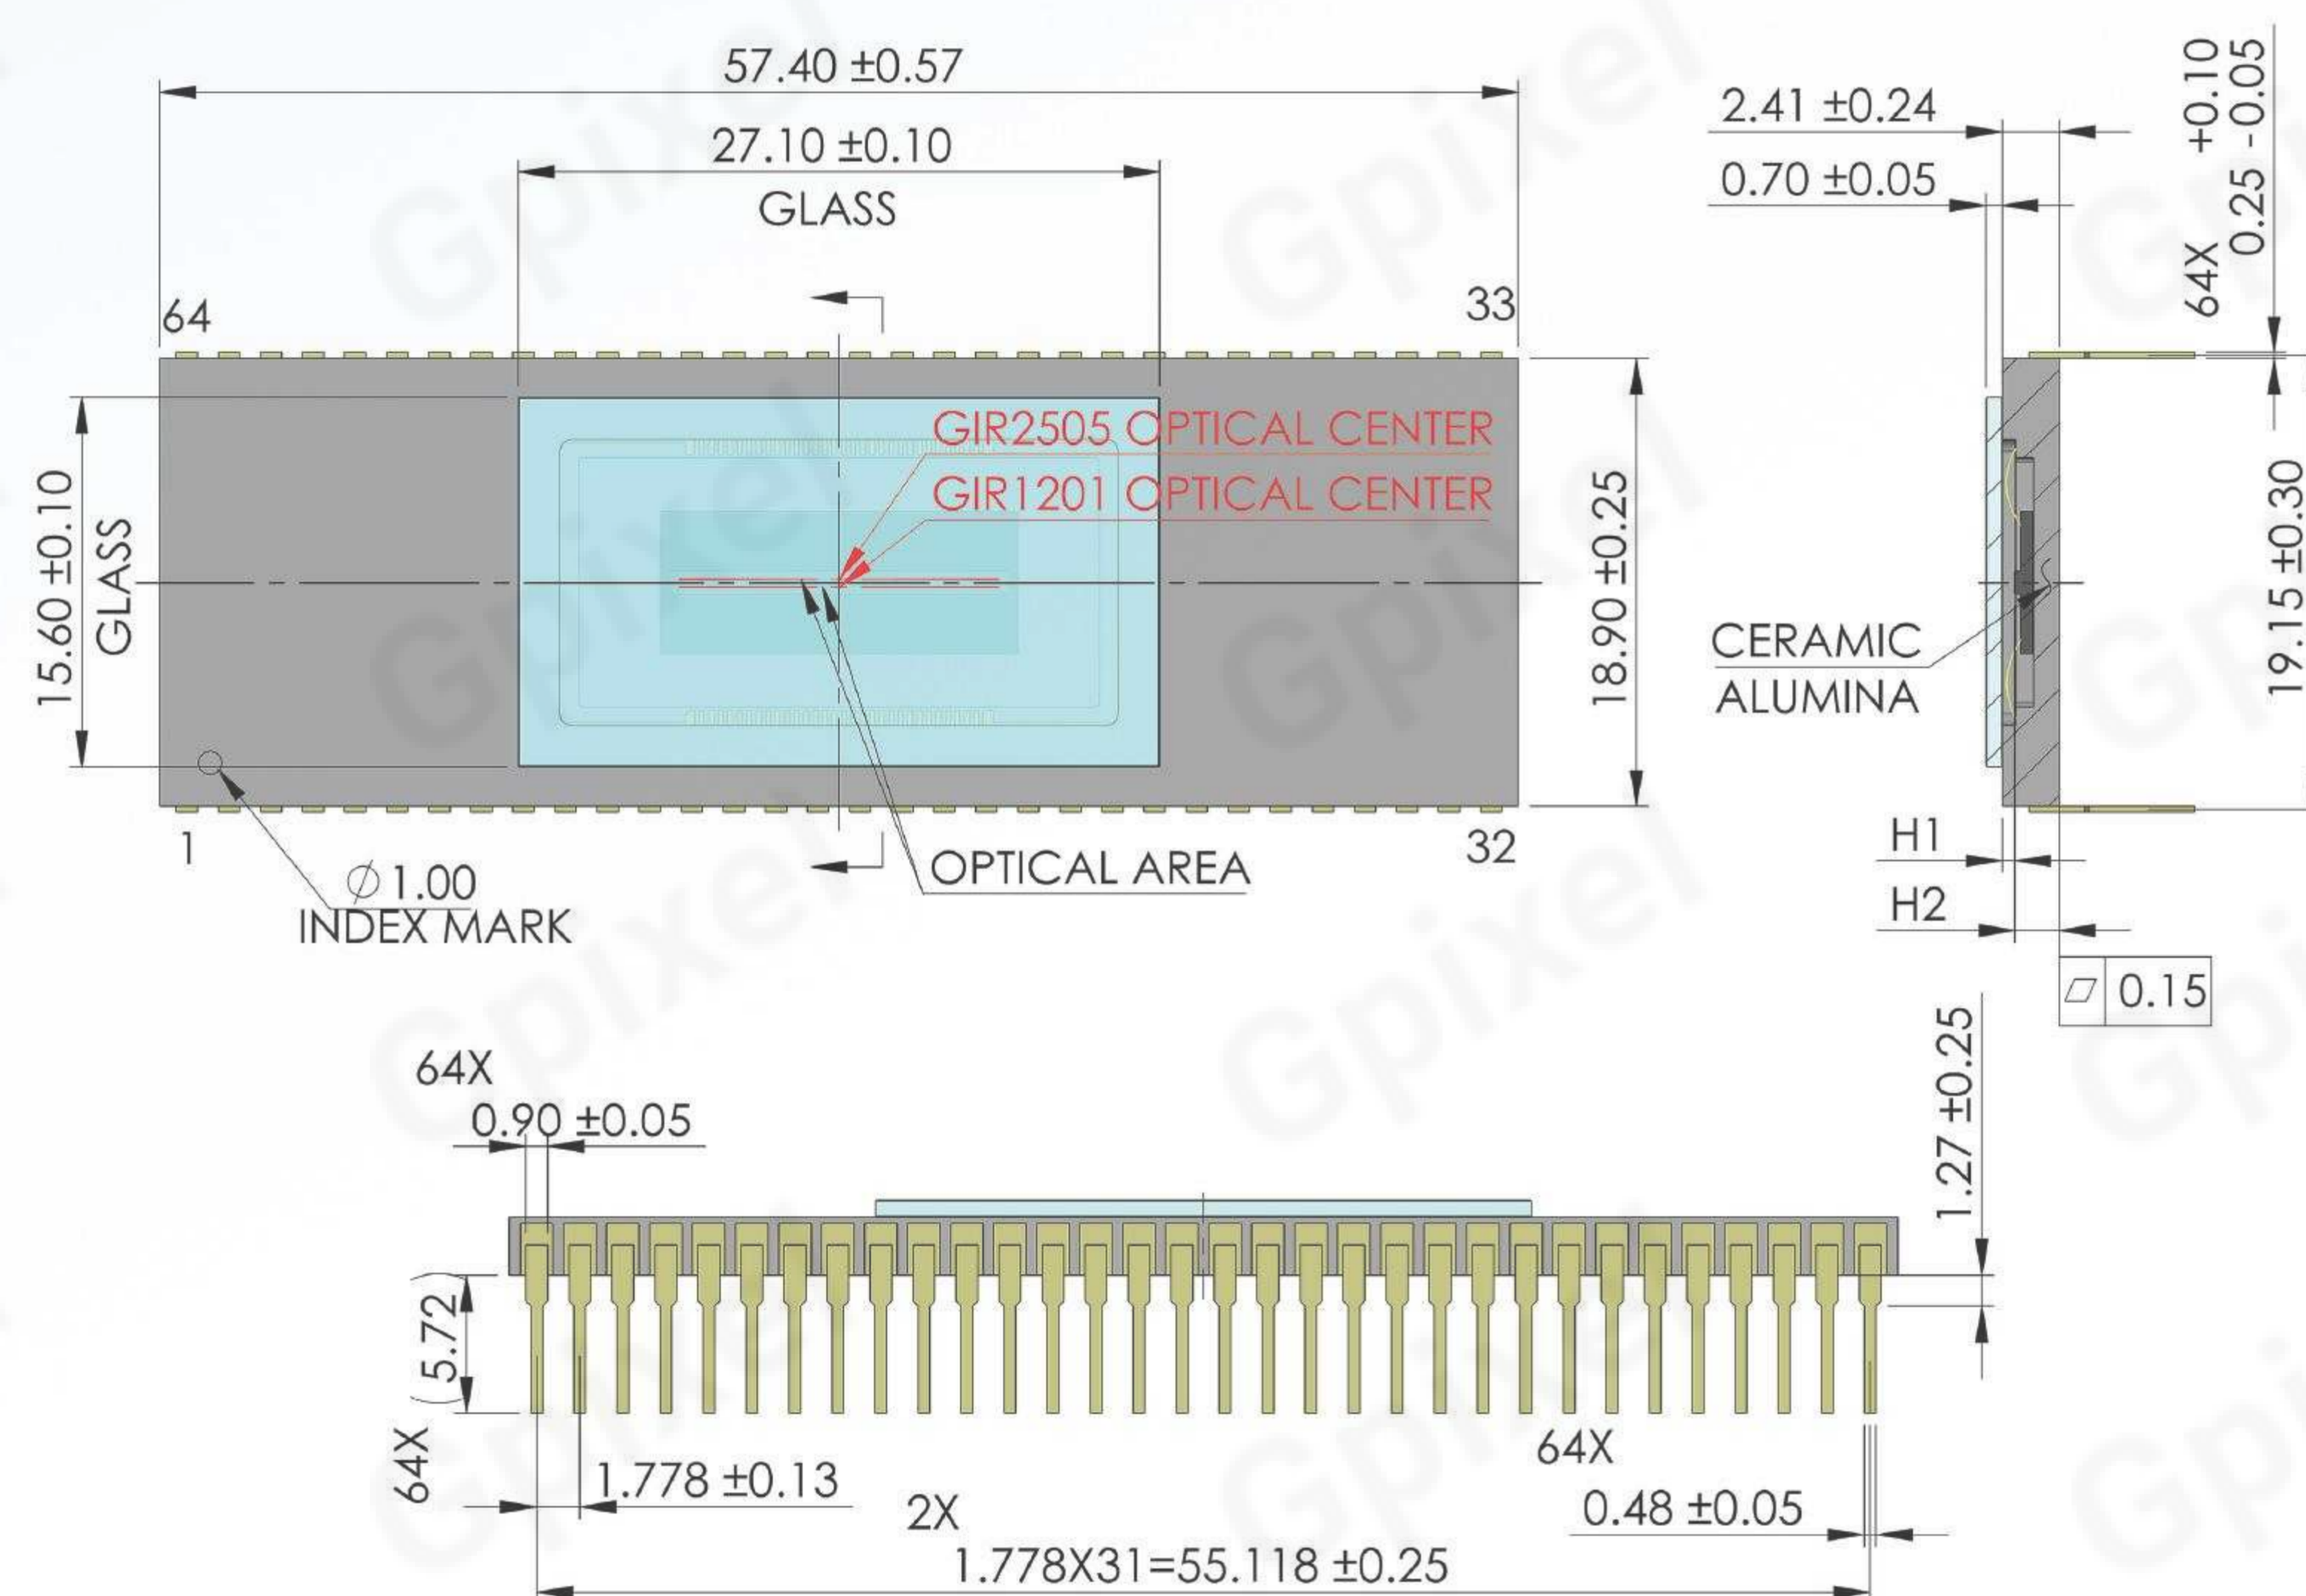

# GIR1201

## 1024 x 1 InGaAs LINE SCAN SENSOR

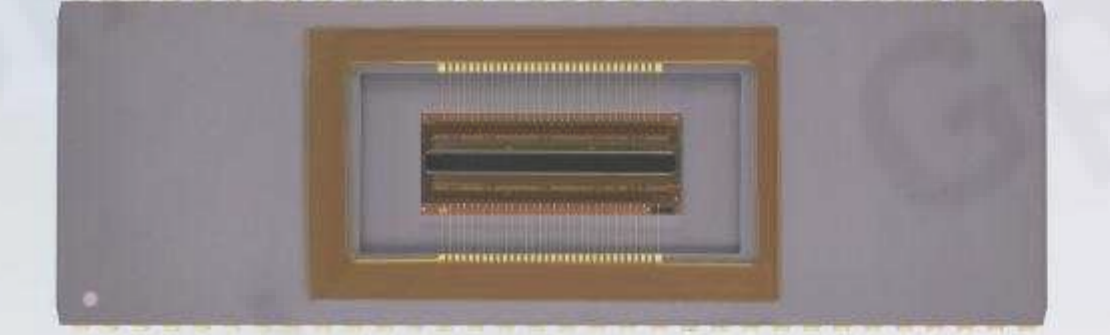

**GIR1201** is a 1024 (H) x 1 (V) InGaAs line scan image sensor with 12.5 μm square global shutter pixel. The sensor integrates a 12 bit ADC and delivers a dynamic range of 72 dB. Both high-gain (HG) and low-gain (LG) modes are supported. In LG mode, GIR1201 has a maximum full well capacity of 1.6 Me<sup>-</sup> with readout noise of 400 e<sup>-</sup>. In HG mode, the maximum full well capacity is 120 ke<sup>-</sup> with readout noise of 88 e<sup>-</sup>. It utilizes 4 pairs of Sub-LVDS interfaces with a maximum data rate of 1.68 Gbps for a maximum line frequency of 71.9 kHz. GIR1201 consumes less than 450 mW at the highest line frequency and is packaged in a 64 pins DIP with a package size of 57.4 x 18.9 mm.

### Key Features and Benefits


- Sub-LVDS output format
- On-chip 12bit ADC with dynamic range of 72 dB
- Line rate up to 71.9 kHz


### Application

- Industrial Inspection
- Color and Food Sorting
- OCT

Specifications			
<b>Nr of Active Pixels</b>	1024(H) x 1(V)	<b>Optical Format</b>	12.8 mm
<b>Photosensitive area</b>	12.5 μm x 12.5 μm	<b>Shutter Type</b>	Global Shutter
<b>Peak QE</b>	75% (1550 nm)	<b>Temporal Noise</b>	88 e <sup>-</sup> (12 bit,HG),400 e <sup>-</sup> (12 bit,LG)
<b>Full Well Capacity</b>	120 ke <sup>-</sup> (12 bit,HG),1.6 Me <sup>-</sup> (12 bit,LG)	<b>PRNU</b>	< 2%
<b>Dynamic Range</b>	62 dB (12 bit,HG),72 dB (12 bit,LG)	<b>Max Line Rate</b>	71.9 kHz
<b>Output Format</b>	2 ch Sub-LVDS	<b>Channel Multiplexing</b>	2 to 1
<b>ADC</b>	12 bit	<b>Max. Data Rate</b>	1.68 Gbps
<b>Chroma</b>	-	<b>Power Consumption</b>	0.45 W
<b>Supply Voltage</b>	3.3 V (analog),1.5 V (digital),1.8 V (IO)	<b>Package</b>	64 pins DIP (57.4mm x 18.9 mm)

### Package Drawing

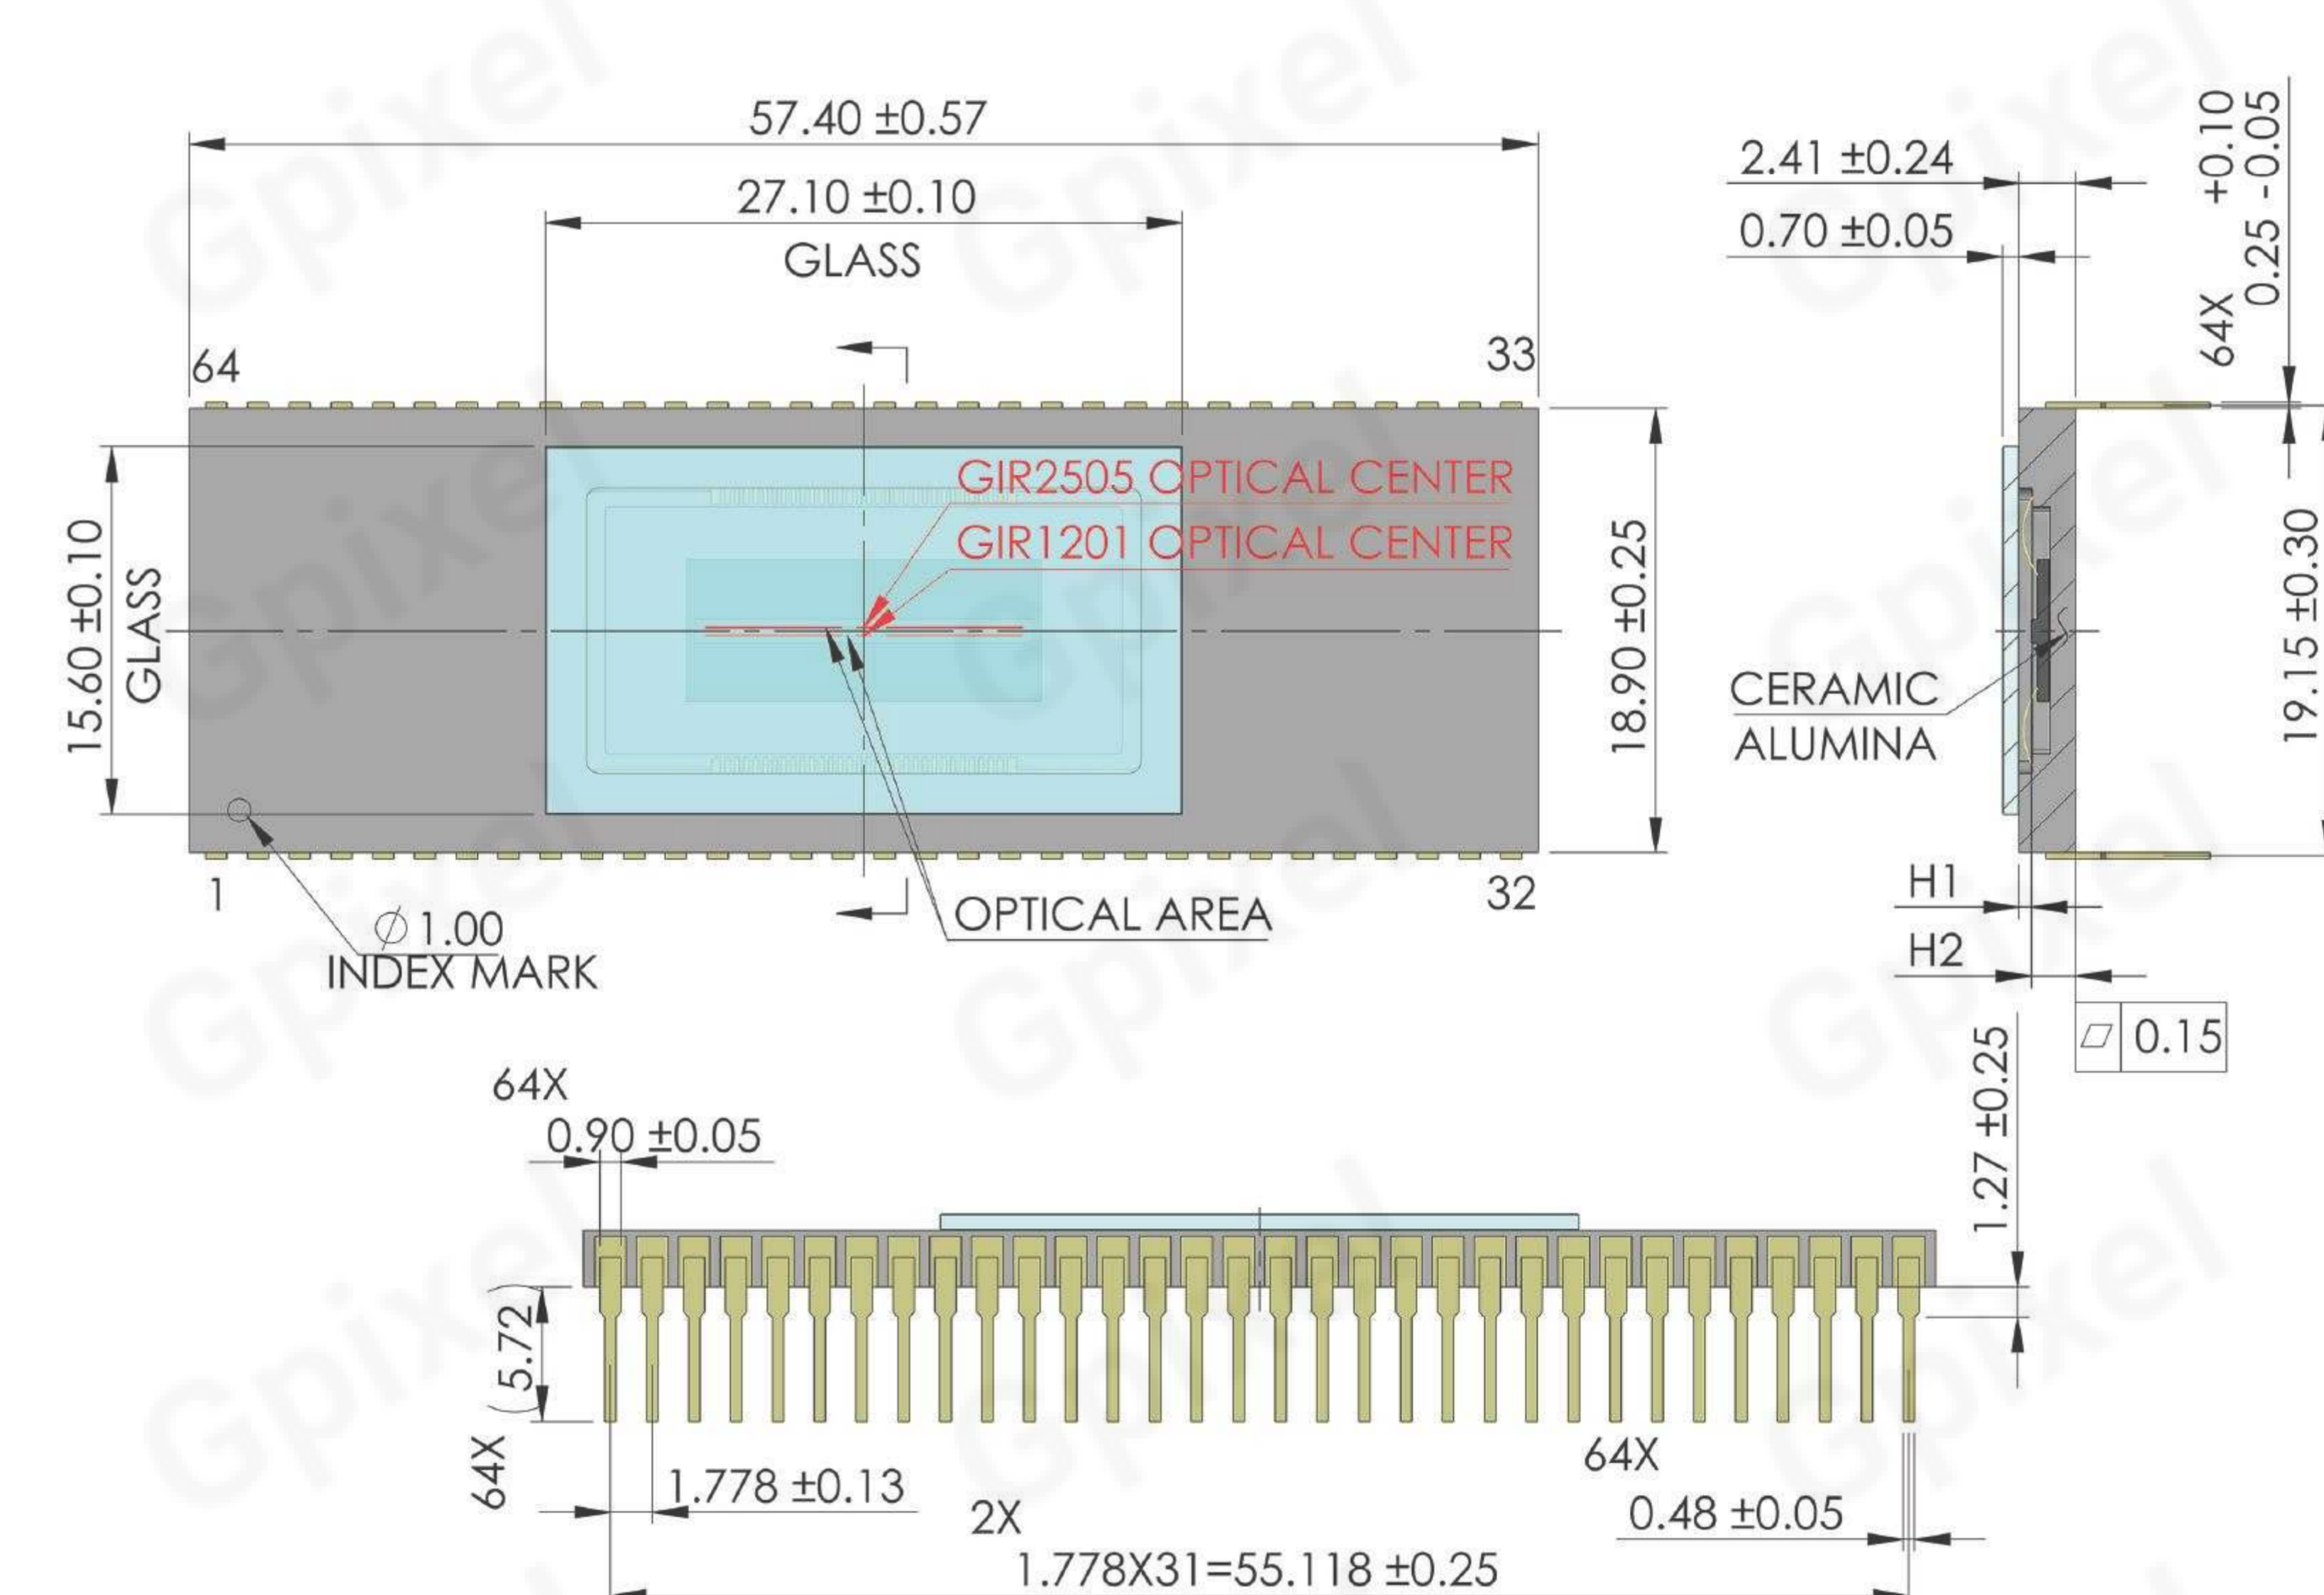

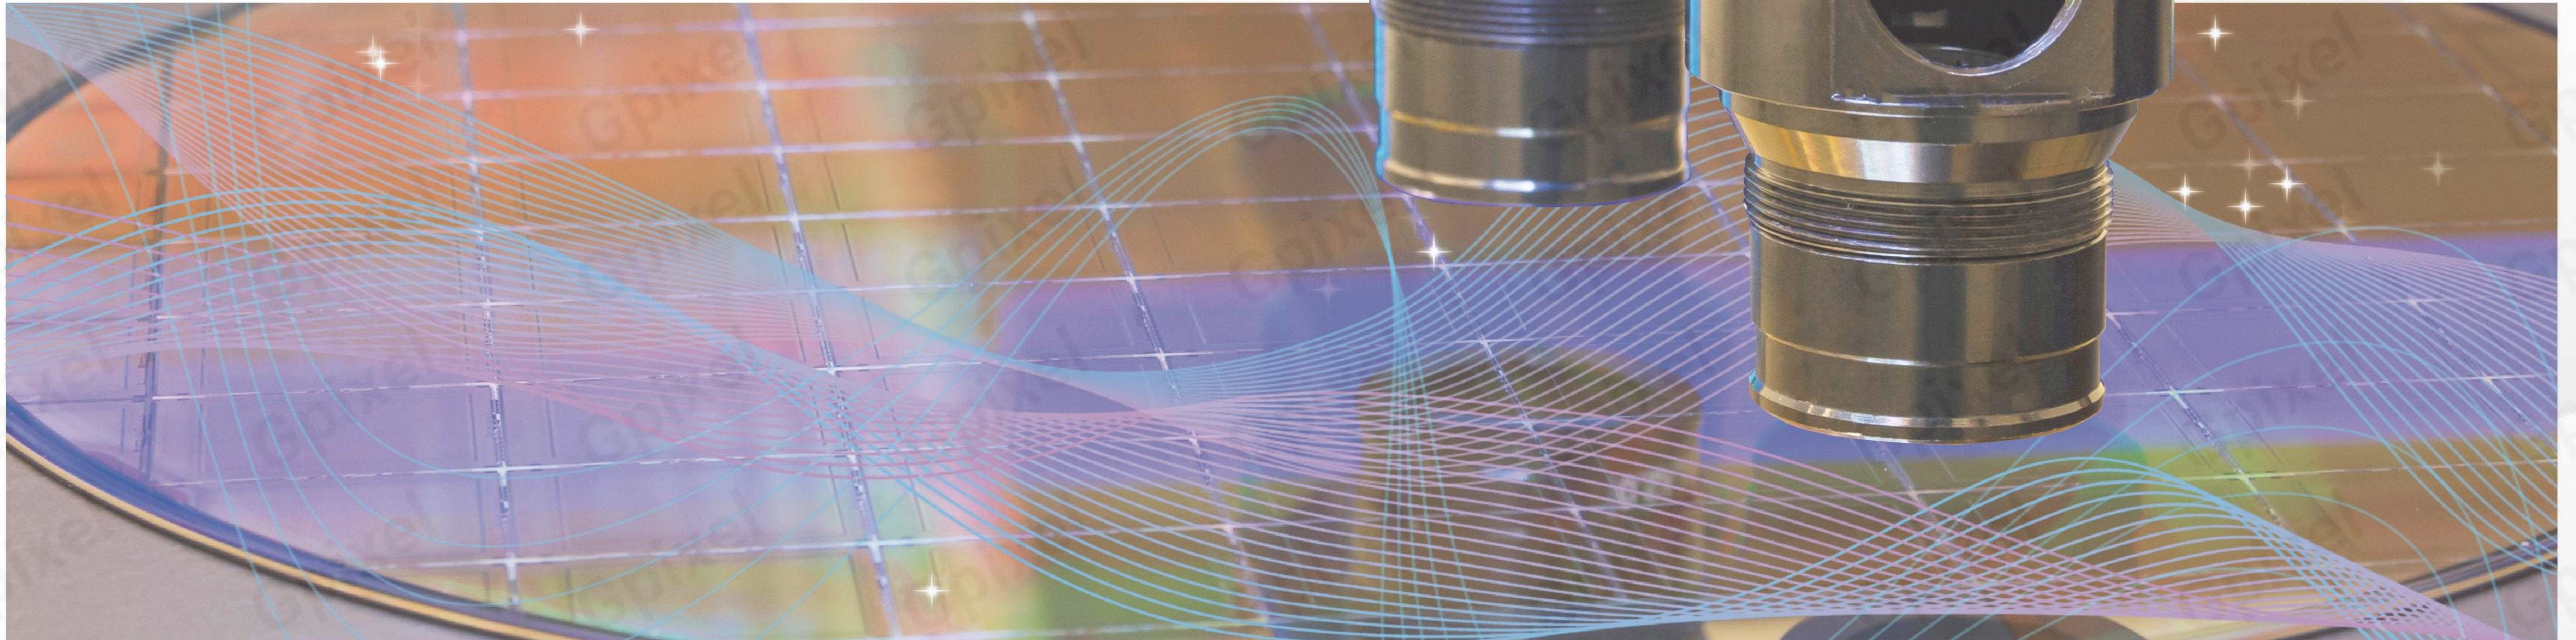

## Custom Design

### Full Custom

- Customized IC, package, and cover glass
- Chip architecture and detailed design, product testing and reliability experiments

### Semi Custom

- Customize an existing design
- Color filters, micro lenses
- Package type
- Glass cover plate coating
- Chip final test standard