


GSENSE2020BSI Product Flyer

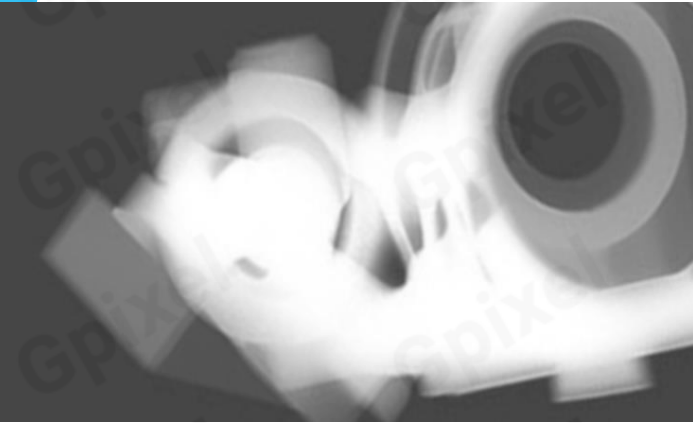

4MP SCIENTIFIC BSI CMOS IMAGE SENSOR

Designed with the state-of-art backside illuminated scientific CMOS technology, GSENSE2020BSI is a 4 Megapixel sensor with $6.5\mu\text{m}$ pixel size, featuring 95% quantum efficiency and a readout noise of less than $1.2e^-$ with correlated multi-sampling (CMS). Ideal for bio-imaging, life science, astronomy and scientific imaging, GSENSE2020BSI also provides a solution for industrial inspection requiring superior UV sensitivity thanks to its high frame rate and global reset rolling shutter. GSENSE2020BSI-PS is processed with PulSar technology which achieves allows for direct detection down to VUV, EUV and soft X ray range.

GSENSE2020BSI is pin-compatible with GSENSE2020s and GSENSE2011s, allowing easy hardware integration with minimized development effort and fast time-to-market.



Key Features

- $6.5\mu\text{m}$ Square Pixels
- Quantum efficiency of 95% @ 560nm
- Max. frame rate up to 43fps @HDR mode
- Readout noise $< 1.2 e^-$ @2-CMS
- Sensitivity: $1.1 \times 10^8 e^-/((W/m^2)\cdot s)$ @ 550nm
- PulSar technology

Applications

- Bio-imaging and life science
- Astronomy and scientific imaging
- UV Industrial inspection
- Corona detection
- Semiconductor inspection
- High-end security and surveillance

Sensor Specifications

Resolution	2048 x 2048	Optical format	1.2 "
Pixel size	6.5 μ m × 6.5 μ m	Photo-sensitive area	13.3mm × 13.3mm
Shutter type	Rolling shutter/global reset	Quantum efficiency	95%@560nm 60%@800nm
Full well capacity	55ke ⁻	Pixel clock rate	600MHz
Dark noise	1.2 e ⁻ @ CMS 1.6 e ⁻ @ HDR HG	Dark current	0.07e ⁻ /p/s @ -30°C
Dynamic range	90.5dB	Frame rate	43fps@12bit 74fps@11bit
Output interface	8 pairs of LVDS @12-bit 16 pairs of LVDS @ 11-bit	Max. Data rate	4.8Gbps @ 12bit 9.6Gbps @ 11bit
Chroma	Mono	Power consumption	<1.2W
Supply voltage	3.5V for analog 2.0V for digital	Package	153 pins μ PGA 26.1mmx29.5mm

Ordering Information

Sensor Part No.

GSENSE2020BSI-ABM-NUN-AR1
Standard BSI process, Grade 1

GSENSE2020BSI-APM-NUN-AR1
PuISar Technology, Grade 1

EVK Part No.

EVA-2020B-RC11 (11bit) / EVA-2020B-RC12 (12bit)
USB interface, 3 stacked PCB boards

Contact Gpixel HQ

Building #5, Optoelectronic
Information Industrial Park,
#7691 Ziyou Road,
Changchun, Jilin, China.

Tel: +86-0431-85077785
Email: info@gpixel.com
Website: www.gpixel.com



All rights reserved.
Subject to change without notice